A FAWCETT PUBLICATION

Now 10¢

MECHANIX ILLUSTRATED

FEBRUARY
NSC

WORLD CHAMPION MATCH GAME BOWLER

Joe Falcaro TELLS YOU HOW TO BOWL

SEE PAGE 35

FEBRUARY 1940
MECHANIX ILLUSTRATED
10 CENTS

BOOK BARGAINS FOR MEN!

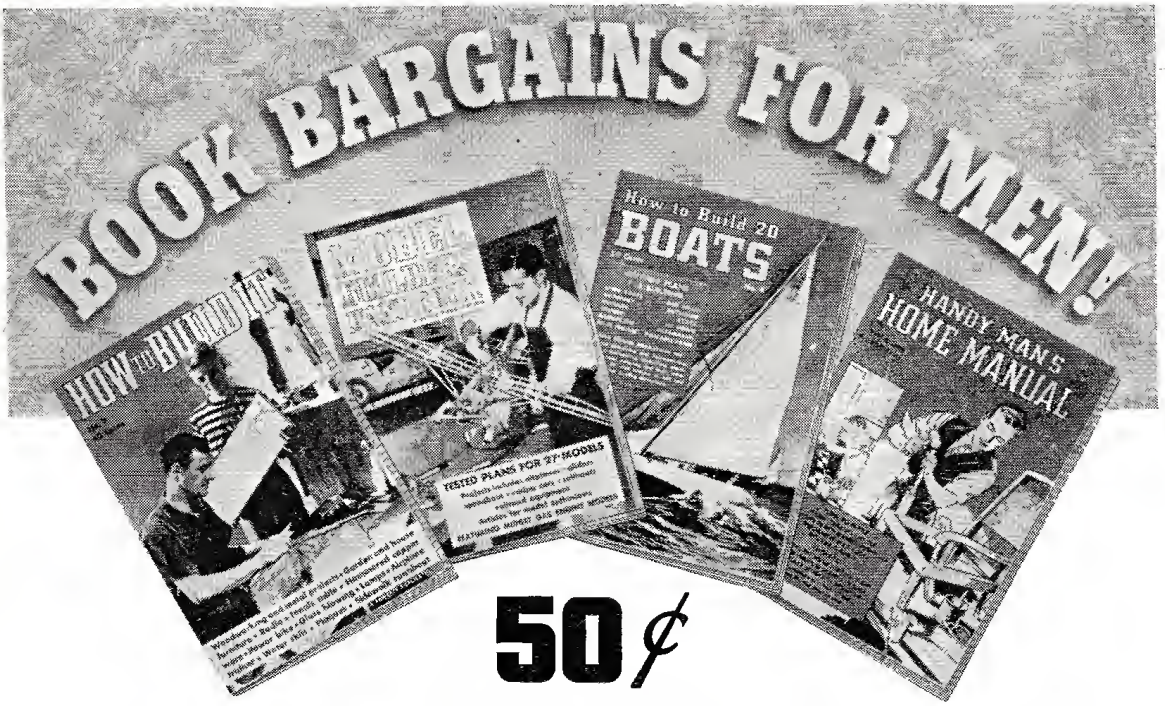

50¢

Here are four outstanding book bargains of great value to the practical man. Each of these handsome, lavishly-illustrated volumes will help you derive the maximum benefit from your workbench, hobby or sport. They are printed in rotogravure, 144 pages, expertly written and edited. These books are available at the surprisingly low price of only 50 cents, postpaid. Order yours today. Use the convenient coupon below.

HOW TO BUILD IT—Just off the press! This *all-new* edition is packed with fascinating and useful home workshop projects, suitable for beginners and experts alike. Contains articles on woodworking and metal projects, radio, hammered copper ware, glass blowing, lamps, plaques, water skis, tennis table, sidewalk runabout, etc. Complete, detailed, simple specifications throughout. Illustrated, 144 pages, only 50 cents.

MODEL BUILDERS' HANDBOOK—Build your own model planes, boats, auto racers! *Model Builders' Handbook* contains complete, detailed plans for the construction of twenty-seven superb working models, plus articles on dozens of related subjects. Using these plans, you can easily build the Westland Lysander, a gas-powered flying-scale model of the famous British war plane; Slipstream Susy, super-streamlined auto racer; Yumping Yimminy, fast 27" powered speedboat, and others. Also special features on care and conditioning of model engines; how to make a model airplane wind tunnel; how to carve a propeller. Illustrated, 144 pages, only 50 cents.

HOW TO BUILD 20 BOATS—This is the latest and best of the famous Fawcett boat-building books. This edition (No. 4 of the series) contains illustrated plans certified by famous naval architects. Every boat described has been built, sailed and tested. Utmost simplicity and accuracy in plans and specifications allow novice as well as expert to build good, seaworthy craft. *How To Build 20 Boats* contains plans for building cruisers, day sailers, ice boats, dinghies, speedcraft, etc., at a fraction of the normal cost. Also articles on care and maintenance of boats. Illustrated, 144 pages, only 50 cents.

------*CUT OUT AND MAIL TODAY!*------

FAWCETT PUBLICATIONS, INC., M-2
Greenwich, Conn.

Enclosed find money order, check or stamps (no coins). Please send me, postpaid, the book(s) I have checked below, at 50 cents each.

☐ HOW TO BUILD 20 BOATS (No. 4) ☐ MODEL BUILDERS' HANDBOOK
☐ HANDY MAN'S HOME MANUAL ☐ HOW TO BUILD IT

Name .....

Address .....

City..... State.....

(Note: If you do not wish to cut this cover, you may order by letter. Be sure to enclose full address and remittance.)

HANDY MAN'S HOME MANUAL—This book will repay its cost many times over by telling you how to make countless repairs and improvements around the house without calling in professional help. Full of easy how-to-make, how-to-repair, and how-to-improve kinks. Simple plans for building useful equipment such as gates, garden furniture, kitchen cabinets, etc. Ideas for improving and repairing home heating plant, window screens, doors. Hundreds of other valuable tips for the handy householder. Illustrated, 144 pages, only 50 cents.

THIS EMPTY MEANS THIS EMPTY

It takes brain to earn money—trained brain! The man without training is usually the man without cash. You can train your brain! Thousands of men have done it through spare-time study of I. C. S. Courses. Be a cash man—be a trained man—mail this coupon!

INTERNATIONAL CORRESPONDENCE SCHOOLS

BOX 2325-T, SCRANTON, PENNA.

★ Without cost or obligation, please send me a copy of your booklet, "Who Wins and Why," and full particulars about the course *before* which I have marked X: ★

TECHNICAL AND INDUSTRIAL COURSES

- ☐ Agriculture
- ☐ Air Brake
- ☐ Air Conditioning
- ☐ Architectural Drafting
- ☐ Architecture
- ☐ Auto Engine Tune-up
- ☐ Auto Technician
- ☐ Aviation
- ☐ Boilermaking
- ☐ Bridge Engineering
- ☐ Building Estimating
- ☐ Chemistry
- ☐ Civil Engineering
- ☐ Coal Mining
- ☐ Concrete Engineering
- ☐ Contracting and Building
- ☐ Cotton Manufacturing
- ☐ Diesel Engines
- ☐ Electrical Engineering
- ☐ Electric Lighting
- ☐ Fire Bosses
- ☐ Fruit Growing
- ☐ Heating
- ☐ Heat Treatment of Metals
- ☐ Highway Engineering
- ☐ House Planning
- ☐ Locomotive Engineer
- ☐ Machinist
- ☐ Management of Inventione
- ☐ Managing Men at Work
- ☐ Manufacture of Pulp Paper
- ☐ Marine Engines
- ☐ Mechanical Drafting
- ☐ Mechanical Engineering
- ☐ Mine Foreman
- ☐ Navigation
- ☐ Patternmaking
- ☐ Pharmacy
- ☐ Plumbing
- ☐ Poultry Farming
- ☐ Practical Telephony
- ☐ Public Works Engineering
- ☐ Radio, General
- ☐ Radio Operating
- ☐ Radio Servicing
- ☐ R. R. Section Foreman
- ☐ R. R. Signalmen's
- ☐ Refrigeration
- ☐ Sanitary Engineering
- ☐ Sheet Metal Work
- ☐ Steam Electric
- ☐ Steam Engines
- ☐ Steam Fitting
- ☐ Structural Drafting
- ☐ Structural Engineering
- ☐ Surveying and Mapping
- ☐ Telegraph Engineering
- ☐ Textile Designing
- ☐ Toolmaking
- ☐ Welding, Electric and Gas
- ☐ Woolen Manufacturing

BUSINESS COURSES

- ☐ Accounting
- ☐ Advertising
- ☐ Bookkeeping
- ☐ Business Correspondence
- ☐ Business Management
- ☐ Cartooning
- ☐ Civil Service
- ☐ College Preparatory
- ☐ Commercial
- ☐ Cost Accounting
- ☐ C. P. Accounting
- ☐ First Year College
- ☐ Foremanship
- ☐ French
- ☐ Grade School
- ☐ High School
- ☐ Illustrating
- ☐ Lettering Show Cards
- ☐ Railway Postal Clerk
- ☐ Salesmanship
- ☐ Secretarial
- ☐ Service Station Salesmanship
- ☐ Sign Lettering
- ☐ Spanish
- ☐ Traffic Management

DOMESTIC SCIENCE COURSES

- ☐ Advanced Dressmaking
- ☐ Foode and Cookery
- ☐ Home Dressmaking
- ☐ Professional Dressmaking and Designing
- ☐ Tea Room and Cafeteria Management, Catering

Name.....*Age*.....*Address*.....

City.....*State*.....*Present Position*.....

Canadian residents send coupon to International Correspondence Schools Canadian, Limited, Montreal, Canada
British residents send coupon to I. C. S., 71 Kingsway, London, W. C. 2, England

PRICE
10 CENTS

SAME PRICE
IN CANADA

MECHANIX ILLUSTRATED

FEBRUARY
1940

Volume XXIII
Number 4

Copyright 1940 by Fawcett Publications, Inc.
Printed in U. S. A.

SPECIAL FEATURES

How to Bowl - - - - - - - - - - - - - - - 35
By Joe Falcaro

Your Job—Radio Servicing - - - - - - - - 44
By Donald G. Cooley

Beauty Takes a Beating - - - - - - - - - 49

Box Yourself a Bungalow - - - - - - - - - 51

Can This War Be Won? - - - - - - - - - - 52
By Maxwell Hamilton

Flowers That Live Forever! - - - - - - - - 59

Wood Makes a Comeback! - - - - - - - - 62

Riding the Frozen Freight - - - - - - - - 68
By James Montagnes

Want to Buy a Rattlesnake? - - - - - - - - 74
By Harry Pederson

(Continued on page 10)

BRAKES HOWL as the speeding car tries vainly to avert the tragedy. For a split second a figure is outlined in the headlight glare. There is a brief human scream, a thudding impact.

For an instant the car hesitates. The driver gives a fleeting backward glance at the huddled figure in the street. His fear-driven foot presses down on the accelerator and the car roars away into the night.

Hit and run. . . .

How police and science work hand in hand to track down the criminal driver from the fragmentary evidence he leaves at the scene of the accident is one of the thrilling features in the March issue of MI.

You'll also find an article predicting the practical uses of electrical wizardry that so far has served only to mystify; another about the man who found there was gold in "them thar" guinea pigs; and plenty of other interesting articles, news shorts, and regular MI features.

The new MECHANIX ILLUSTRATED is on sale at all newsstands the first of every month.

Published monthly by Fawcett Publications, Inc., 11th Street and Broadway, Louisville, Kentucky. Executive Office—22 W. Putnam Avenue, Greenwich, Connecticut. Editorial and Advertising offices—1501 Broadway, New York, New York. Send subscriptions to the Louisville, Kentucky, or Greenwich, Connecticut, addresses.

Entered as second-class matter under the Act of March 3, 1879, at the post office in Louisville, Ky., with additional entry at Greenwich, Conn. Not responsible for unsolicited manuscripts. In U. S. and Possessions, 10c a copy; $1.00 a year. In Canada, 10c a copy; $1.50 a year. Other Postal Unions, $2.00 a year. Foreign subscriptions and sales should be remitted by International Money Order in United States funds, payable at Greenwich, Connecticut, U. S. A. East Indian Agent P. C. Eranee Sons, Bombay, India. Printed in U. S. A. Advertising forms close the first of second month preceding date of issue. Advertising offices: New York, 1501 Broadway; Chicago, 360 N. Michigan Ave.; San Francisco, Simpson-Reilly, 1014 Russ Bldg.; Los Angeles, Simpson-Reilly, Garfield Bldg. Member Audit Bureau of Circulations.

W. H. FAWCETT, Publisher RALPH DAIGH, Managing Editor ROBERT HERTZBERG, Editor AL ALLARD, Art Director
CLIFF TAYLOR, STANLEY GERSTIN, ROLAND CUEVA, Associate Editors S. S. RABL, Naval Consultant

Business Demands Accountancy

—*because Accountants Command Business*

ACCOUNTANTS are usually in demand—at better than average earnings.

But today—more than ever before—the competent accountant finds his services at an increasing premium.

In the depression, business tightened up the reins and is watching costs—prices—every move—striving to operate on that basis of close control so essential to profits.

Then too, progressive business is building now for future prosperity—laying plans for expansion, for new processes, new markets—getting ready for the opportunities of the next ten years.

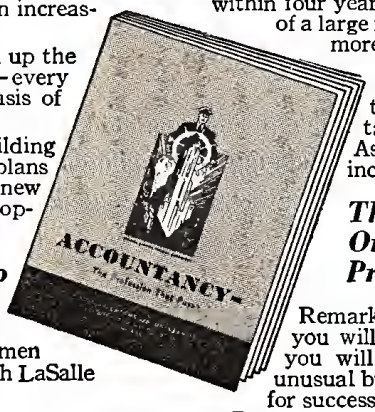

The Home Study Way to Accountancy Success

Thousands upon thousands of men have trained for Accountancy with LaSalle—at night—at home.

Their success — their progress — is a matter of record.

Whether their goal was a C. P. A. degree or advancement in business, our files are full of letters reporting income increases far out of line with the time and cost investment.

Note for instance, these four cases chosen out of many more we might cite. (Names on request.)

F. F. A. was a railroad yard clerk at $112 a month when he began accountancy training with LaSalle. Five years later, his income was 500% larger and he was a Certified Public Accountant and attorney. F. C. was 22 years of age and general all-around man in an Arkansas lumber yard at $75 a month. Five months later, his firm made him manager at $125, and ten months later promoted him to a larger yard at $250 plus a commission on sales.

O. D. always thought stories about LaSalle training were fairy tales until the training helped him—a clerk at $75 a month—move up in six months to $125, and within four years to $250. He became General Auditor of a large national organization—with his income more than seven times his starting salary.

As an assistant bookkeeper in a great Western bank, C. F. H. looked forward to slow progress. But LaSalle accountancy training speeded up his climb to Assistant Trust Officer and to a salary increase of 400 per cent.

These Men Won Success in Ordinary Times—You Will Profit By Unusual Times

Remarkable as is the success of these men—you will have an advantage over them—you will be entering accountancy when unusual business conditions work with you for success.

Present conditions not only call for more capable accountants—but offer unusual opportunities for both quick and permanent success. The accounting student of 1940 will face real opportunity in 1941 and the accounting leaders of 1945-50 will be largely determined in 1940-1941.

—If You Can Qualify

Ask yourself three questions:

1. Are you ambitious?
2. Have you determination?
3. Can you see and grasp an opportunity?

If you have determination; if you are ambitious; if you can take advantage of circumstances—*prove it* by investigating. A three-cent stamp, sixty seconds time, and the coupon below will bring you full information regarding Accountancy training and the opportunities to which such training leads. *Then* you can judge intelligently.

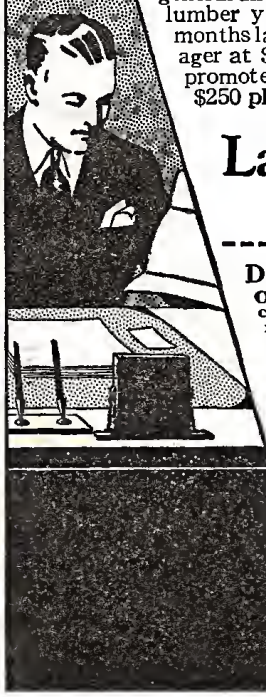

LaSalle Extension University

A Correspondence Institution

Dept. 2493-HR, **CHICAGO**

Opportunities in Accountancy—Check below and we will send you a free copy of "Accountancy, the Profession that Pays," also information about our new training in Higher Accountancy, all without obligation.

☐ **Higher Accountancy**

Other LaSalle Opportunities: If more interested in one of the other fields of business indicated below, check that:

☐ Business Management
☐ Expert Bookkeeping
☐ C. P. A. Coaching
☐ Railway Accounting
☐ Traffic Management
☐ Effective Speaking
☐ Law: LL.B. Degree
☐ Commercial Law
☐ Industrial Management
☐ Modern Foremanship
☐ Business Correspondence
☐ Stenotypy
☐ Modern Salesmanship
☐ Business English

Name.....Age.....

Present Position.....

Address.....

Be a Radio

MANY MAKE $30,

J. E. SMITH
President
National Radio Institute
Est. 25 Years

I TRAINED THESE MEN

$10 TO $20 A WEEK IN SPARE TIME

"I repaired many Radio sets when I was on my tenth lesson. I really don't see how you can give so much for such a small amount of money. I have made an average of $10 to $20 a week—just spare time."—JOHN JERRY, 1529 Arapahoe St., Denver, Colo.

OWNS SHOP, MAKES $3,000 A YEAR

"Before taking your Course I earned about 17½ cents per hour as a truck driver. When I had completed 20 lessons I started service work. During the last year I have made about $3,000 in Radio. I now own my own shop."—KARL KELLY, 306 W. Calhoun St., Magnolia, Ark.

SALARY INCREASED $1,800 YEAR IN RADIO

"I have been regularly employed in radio since my graduation. I have been Chief Engineer of three broadcast stations and at present time am Chief Engineer of WDOD. My salary has increased $1,800 per year since entering Radio and credit is given you for your excellent training."—JULIUS C. VESSELS, Station WDOD, Chattanooga, Tenn.

I will train you at home for RADIO and TELEVISION

Radio is a young, growing field with a future. It offers you many good pay spare time and full time job opportunities. And you don't have to give up your present job, go away from home, or spend a lot of money to become a Radio Technician. I train you right at home in your spare time.

Jobs Like These Go To Men Who Know Radio

Radio broadcasting stations employ engineers, operators, technicians and pay well for trained men. Radio manufacturers employ testers, inspectors, foremen, servicemen in good-pay jobs with opportunities for advancement. Radio jobbers and dealers employ installation and servicemen. Many Radio Technicians open their own Radio sales and repair businesses and make $30, $40, $50 a week. Others hold their regular jobs and make $5 to $10 a week fixing Radios in spare time. Automobile, police, aviation, commercial Radio; loud-speaker systems, electronic devices, are newer fields offering good opportunities to qualified men. And my Course includes Television, which promises to open many good jobs soon.

Why Many Radio Technicians Make $30, $40, $50 a Week

Radio is already one of the country's large industries even though it is still young and growing. The arrival of Television, the use of Radio principles in industry, are but a few of many recent

Set Servicing pays many Radio Technicians $30, $40, $50 a week. Others hold their regular jobs and make $5 to $10 extra a week in spare time.

Loud Speaker System building, installing, servicing and operating is another growing field for well trained Radio Technicians.

FIND OUT ABOUT THIS TESTED WAY

Technician

$40, $50 A WEEK

Radio developments. More than 28,000,000 homes have one or more Radios. There are more Radios than telephones. Every year millions of Radios get out of date and are replaced. Millions more need new tubes, repairs, etc. Over 5,000,000 auto Radios are in use and thousands more are being sold every day. In every branch Radio is offering more opportunities—opportunities for which I give you the required knowledge of Radio at home in your spare time. Yes, the few hundred $30, $40, $50 a week jobs of 20 years ago have grown to thousands.

Many Make $5 To $10 a Week Extra In Spare Time While Learning

The day you enroll, in addition to my regular course, I start sending you Extra Money Job Sheets which start showing you how to do actual Radio repair jobs. Throughout your course I send plans and directions which have helped many make from $200 to $500 a year in spare time while learning.

You Get Practical Experience While Learning

I send you special Radio equipment; show you how to conduct experiments, build circuits illustrating important principles used in modern Radio and Television receivers, broadcasting station and loudspeaker installations. My 50-50 method of training gives you both printed and actual work with Radio parts—makes learning at home interesting, fascinating, practical. I ALSO GIVE YOU A MODERN, PROFESSIONAL, ALL-WAVE RADIO SET SERVICING INSTRUMENT to help you make more money fixing Radio sets while learning and to equip you with a professional instrument for full time work after you graduate.



Broadcasting Stations employ operators, installation, maintenance men and Radio Technicians in other capacities and pay well.

Find Out What Radio Offers You

Act today. Mail coupon for my 64-page book, "Rich Rewards in Radio." It points out Radio's spare time and full time opportunities and those coming in Television; tells about my course in Radio and Television; shows many letters from men I trained, telling what they are doing and earning. Read my money back agreement. Find out what Radio offers you. Mail coupon in envelope or paste on a penny postcard—**NOW.**

J. E. SMITH, PRES., DEPT. 0BH, NATIONAL RADIO INSTITUTE, WASHINGTON, D. C.

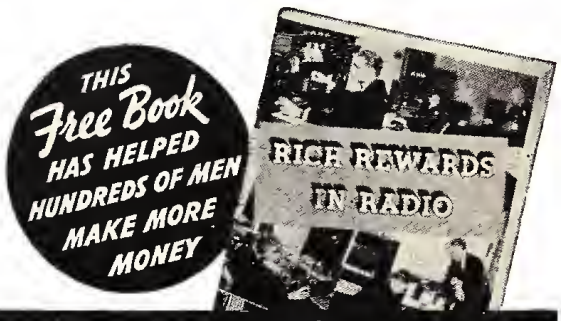

Automobile Radio is another new Radio field —selling, installing, servicing. One million or more auto owners will install radio sets within the next year.

Mail this to get 64 page book FREE

J. E. Smith, President, Dept. OBH
National Radio Institute, Washington, D. C.

Dear Mr. Smith:

Send me FREE, without obligation, your 64-page book "Rich Rewards in Radio" which points out Radio's opportunities and tells how you train men at home to be Radio Technicians. (Write plainly.)

Name..... Age.....

Address .....

City..... State.....

TO BETTER PAY

INVENTORS

Act Now TO PROTECT YOUR INVENTION WITH U.S. PATENT

Small Ideas May Have Large Commercial Possibilities

Inventions do not have to be complicated to be profitable when Patented. The 5c and 10c stores flourish on simple Patented products which are commercially successful. The zipper, safety pin, thumb tack, paper clip, collar button—all are simple yet familiar inventions—brought their inventors rich rewards. If you have a Patentable invention —act to protect it. Send for our FREE 48-Page Book that tells you how.

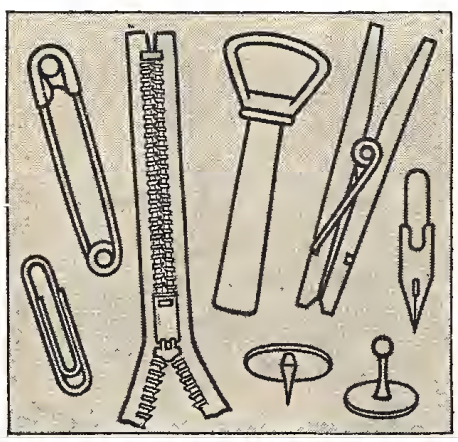

CLARENCE A. O'BRIEN
Dept. OB3, Adams Building, Washington, D. C.
Registered Patent Attorney before U. S. Patent Office

Free Book TELLS IMPORTANCE OF QUICK ACTION—HOW TO OBTAIN PATENT AND MARKET INVENTIONS

If you have invented something, if you're interested in inventing something, you need our new 48-page book that gives the entire Story of Patents. It tells you for the first time about new phases of invention, how others succeeded, how the patent laws protect you, how to market your invention, where to obtain finances, how to form a company, partnership, or arrange for royalties from your invention's sale.

PRACTICAL BENEFITS OF THIS BOOK

You will find 6 complete pages illustrated with simple inventions that have succeeded in six different fields of industry. Over 100 illustrations are in this book. You will read the stories of ten (illustrated) of America's most famous inventors. You will find an experienced and thorough survey of market conditions affecting the inventor—showing the possibilities for commercial invention today. Entire chapters are devoted to the value of a patent in promoting the final success of your invention. The importance of quick action in applying for patent is stressed—facts revealing danger of delay are emphasized.

If you expect to realize profits from your invention you must protect it with a U. S. Patent. Otherwise you may find that all your time and labor have been lost, because it often happens that other inventors are working on the same invention. If you have an invention, or an ambition to invent—get the information on obtaining patent AT ONCE!

FREE RECORD OF INVENTION FORM

When you send for our FREE BOOK, we include, also Free, our specially prepared Record of Invention blank, on which you can quickly make and date a sketch and description of your invention. This "disclosure" as it is called, may be absolutely invaluable as evidence for you, should your rights ever be contested. Be sure to get it and use it.

CLARENCE

REGISTERED PATENT ATTORNEY *before U. S. Patent Office*

GET FREE 48-PAGE BOOK

and Free Form for Recording Your Invention

for Quick Action

SEND TODAY

MAIL COUPON NOW

TO CLARENCE A. O'BRIEN

Registered Patent Attorney

BEFORE U. S. PATENT OFFICE

Clarence A. O'Brien, Dept. OB3, Adams Building, Washington, D. C.
Please send me your Big, Free 48-Page Book for Inventors and your Specially Prepared Record of Invention form. This request does not obligate me.

Name.....

Address.....

City.....

(Please write or print plainly). State.....



You Can Patent IMPROVEMENTS IN MACHINERY, ARTICLES, DESIGNS, FORMULAS, ETC., IF NEW

Every year thousands of Patents are granted. Very few, however, represent the discovery of entirely new principles. Most of them provide new methods of doing some every-day thing in a better way—changes for greater efficiency, usefulness, adaptability, or beauty in some previously Patented thing. These IMPROVEMENTS are patentable if new, and actually represent new inventions. These improvement Patents offer large chances for profit if commercially useful. The business world wants improved products and services.

FINISHED DRAWINGS NOT NECESSARY

Our Big Book tells you how you can start immediatcly to apply for Patent Protection even if you haven't finished models or drawings available now. It will tell you how we can prepare the specifications and finished drawings necessary in the form prescribed by the Patent Office—so as to secure for you full Patent Protection. Mail Coupon for Our Big Book TODAY.

OUR SERVICES TO YOU

We are Registered Patent and Trade-Mark Attorneys, serving Inventors all over the United States and abroad. Our Organization is complete. We have Draftsmen, experienced Searchers and Attorneys to serve your interests. We can act as your legal adviser in all Patent Matters. Our complete service is described in Our Big Book. Mail Coupon for it NOW.

REASONABLE FEES—CONVENIENT TERMS

Don't worry about finances. Our fees are very reasonable—we can arrange convenient terms of payment. It is our custom to permit clients to pay for our services in installments as the application progresses in our office. See our Big Book for fees in obtaining Patent. It explains our arrangements clearly. Send for it NOW.

GET FREE BOOK—MAIL COUPON NOW

If you have an invention in the making—if you simply have the crude elements of an invention in mind—you should have our Big FREE BOOK without delay. It will guide you every step of the way—from the preliminary search stage to the issuance of the final patent grant. This book contains twenty-five chapters describing in plain man-to-man language the story of obtaining a patent and marketing an invention. This book is absolutely FREE—just tear off the above coupon or write us a letter or postcard TODAY!

CLARENCE A. O'BRIEN
Dept. OB3, Adams Building, Washington, D. C.
Registered Patent Attorney before U. S. Patent Office

A. O'BRIEN

Dept. OB3, Adams Building . . . . . WASHINGTON, D. C.

•Inventors Free Books

Answer your questions!

Practical Facts You Will Want to Know About

PATENTS TRADE MARKS COPYRIGHTS

• These C. A. Snow & Co. Free Books will save you TIME and MONEY!

Now one of America's oldest firms of patent attorneys offers you important facts on how to protect and commercialize your ideas..the very facts which can save you wasted hours and unnecessary expense. These free books are based on 64 years' experience and tell you exactly what to do to protect your invention.

Find Out RIGHT NOW

Before going any further with your idea—be sure you are on the "right track". You will be able to know *before* spending more time and money the costs and procedure in obtaining a patent. In the books you will find the plain answers to questions that have long bothered inventors.

Confidential, quick service

Our years of experience in helping others should make you feel perfectly safe in dealing with this reputable firm. All inquiries are answered immediately and held in strictest confidence. Write today.

TEAR OUT and Mail Coupon Today

C. A. SNOW & CO.

Registered Patent Attorneys Since 1875

302 SNOW BLDG., WASHINGTON, D. C.

Gentlemen: Please send me—without cost or obligation—your FREE books, "Suggestions on How to Commercialize Your Invention" and "How We Protect You." Also Certification of Invention form.

Name .....

Street and No. .....

City or Town .....State.....

CONTENTS—Continued from page 4

DEPARTMENTS

Chips From The Editor's Workbench - - - 14
You're Right—That's Wrong! - - - - - - 65
Amateur Photo Puzzlers - - - - - - - 114
New Ideas For Home and Shop - - - - - 146

AVIATION

Airplane Parking Problem Solved - - - - 43
Fire Fighting From Air - - - - - - - - 43
New Plane Starter Crank - - - - - - - 60
Novel Skid Lands Seaplane - - - - - - 71

AUTOMOTIVE AND CYCLING

Touring Easy With Push-button Top - - - 42
Home-made Monster Bike - - - - - - - 48
Loading Antarctic Tank - - - - - - - - 58
Auto With Running Water - - - - - - - 60
France's 90-Ton Tanks - - - - - - - - 61
Anthracite Driven Auto - - - - - - - - 67
World's Largest Steamroller - - - - - - 72
Dutch Bog Down Own Tanks - - - - - - 73

BOATS AND BOATING

Streamlined River Steamer - - - - - - - 42
"Golden Hind" To Sail Again - - - - - - 58
Lone Sailor Foils Davy Jones - - - - - - 72

NEW MECHANICAL DEVICES

Dobbin Gets the Kicks Cranked Out - - - 42
Diathermy Machine For Cows - - - - - - 48
Eye Testing Instrument - - - - - - - - 48
Loom Makes Crippled Children Happy - - - 58
Sun Supplies Heat For This House - - - - 60
Latest Rainy Day Gadget - - - - - - - 64
Ice Without Ice Machine - - - - - - - - 64
"Vacuum Cleaner" Unloads Bulk Grain - - 66
Perimeter Tests Side Vision - - - - - - 71
Cigarette Holder That Douses Light - - - 72
Electrified Ventilator Electrocutes Flies - - 73
New Type Of Bug Trap - - - - - - - - 77
Accurate Auto Distance Meter - - - - - 77

(Continued on page 12)

Are You qualified to hold one of the thousands of new electrical jobs predicted for 1940?

Learn about my QUICK EASIER WAY TO TRAIN FOR

ELECTRICITY

12-WEEKS PRACTICAL WORK IN COYNE SHOPS

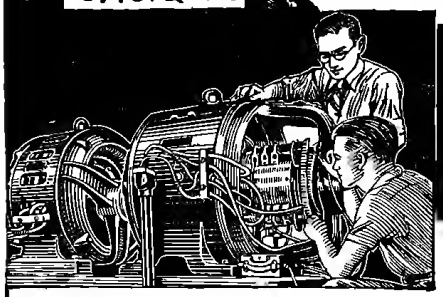

FIRST--You are told and shown how to do it.

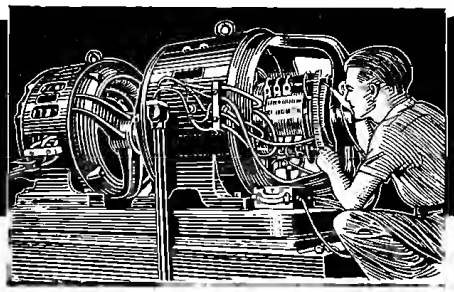

THEN--You do the job yourself.

HOUSE WIRING only one of the many branches you "Learn By Doing."

WANT TO EARN MORE MONEY?

Have you ever dreamed of holding down **a steady, good pay job?** Have you ever dreamed of doing the work you really like in a job that holds promise of **a real future** in the years ahead?

Well, we all know that you can't get the good things in life by just **dreaming** about them. Hundreds of fellows are today holding down mighty fine jobs with prospects of a bright future. They are filling these jobs because they had the foresight to equip themselves with the **right kind of training.** Most of these men were only average fellows a short time ago, but the proper training helped to lift them out of the low pay ranks of unskilled workers. The same opportunity is now offered to **you.**

The great fascinating field of **ELECTRICITY** offers a real future to many men and young men who are willing to prepare for a place in this giant industry.

Here at my school in Chicago, the **world's Electrical Center,** you can get **12 weeks' Shop Training in ELECTRICITY** and **an extra 4 weeks Course in Radio,** that can help give you your start towards a better job.

You will be trained on actual equipment and machinery and because of our method of training, you **don't need previous experience or a lot of education.** Many of my successful graduates never even completed Grammar School. Here in my school you work on generators, motors, dynamos, you do house wiring, wind armatures and do actual work in many other branches of electricity and right now I'm including valuable instruction in **Diesel, Electric Refrigeration** and **Air Conditioning** at **no** extra cost. Our practical shop methods make it **easier to learn—First** the instructors **tell** you **how** a thing should be done—**then** they **show** you how it should be done—**then you do the actual work yourself.**

AN EXTRA 4 WEEKS COURSE IN RADIO INCLUDED

"... Everything was just as stated in literature. And by Coyne methods plenty of instructors to take care of everything, easy to learn. I really was satisfied with Coyne Training." J. Halyk, Canada

"... Coyne has first class instructors to teach you the simplest things to start with and they have the equipment to show you these things as you advance ..." Ben Rickman, S.Car.

I'LL FINANCE MOST OF YOUR TRAINING

You can get this training **first**—then **if you are short of money you can pay for most of it later in easy monthly payments,** starting **60 days** after your 12 weeks' training period is over **—then you have 10 months** to complete your payments. If you need **part time work** to help out with expenses while training in my shops, my employment department will help you get it. Then after graduation this department will give you valuable **lifetime employment service.**

Send the coupon today for all details. When I get it I'll send you my big free book containing dozens of pictures of students at work in my shops. I'll also tell you about my **"Pay After Graduation" plan,** how many **earn while learning** and how we help our students **after graduation.** Fill in, clip coupon, **mail today for your start toward a brighter future.**

H. C. LEWIS, President

COYNE ELECTRICAL SCHOOL

500 S. Paulina St., Dept. 20-53, Chicago

MAIL NOW

H. C. LEWIS, Pres., COYNE ELECTRICAL SCHOOL
500 S. Paulina St., Dept. 20-53, Chicago, Ill.

Dear Sir: Please send me free your big catalog and full particulars of your present offer, also your "Pay-Tuition-After-Graduation" Plan, and also your **Extra 4 Weeks Radio Course.**

Name.....

Address.....

City..... State.....

1,500 NEEDED INVENTIONS

This great 250-page book by R. F. Yates shows you how to concentrate on inventions that will pay BIG MONEY. Gives full descriptions of **1,500 NEEDED INVENTIONS** that manufacturers NEED badly. Covers these fields: **Automotive; Electrical; Mechanical; Chemical; Aviation; Radio; Marine; General Problems.** Don't waste time working on inventions nobody wants to buy; just one of the simple, practical ideas from this book may win you a fortune. Regular price, $2.50.

AMAZING BARGAIN OFFER

HERE'S WHAT YOU GET:

1,500 Needed Inventions	$2.50
Inventors' Selling Guide	2.00
Take Out Your Own Patents	1.00
Protecting and Selling Inventions Without Patents	.50
Regular Price	$6.00
For all 4 Books, You Pay Only	$2.75

(You save $3.25) postpaid. This offer good only while present limited quantities last. ACT NOW. Satisfaction guaranteed. Send only $2.75 for all four of the above books, postpaid—or if you prefer they will be shipped C.O.D. plus postal collection charges.

INVENTORS' SELLING GUIDE

by R. F. Yates tells where to sell patented or unpatented inventions, gives classified list of nearly **1,000 manufacturers who buy ideas.** How to sell chain stores, how to price inventions, how to find buyers. Tells everything an inventor needs to know about **Royalties, Contracts, Patents Pending, Financing, Gyp Schemes,** how to protect unpatented ideas. Cloth, 224 pages, regular price $2.00.

← THOUSANDS of copies of these two books have been sold at regular prices. Now, while the limited supply lasts, you can get both books at the ridiculously low price listed at the left—PLUS two other vital books for inventors. Five days money-back guarantee. Sent C.O.D. if you prefer.

DONLEY PUBLISHING CO.
509 FIFTH AVE. NEW YORK, N. Y.

INVENTORS

BE SUCCESSFUL

Read Invention & Finance—it's your chance to make money. Free particulars concerning contents of magazine given to prospective subscribers. Cut out and send us this advertisement to receive your particulars.

INVENTION & FINANCE MAGAZINE
80-H Wall Street, New York, N. Y.

WANTED INVENTIONS

WE LOCATE BUYERS for and have many requests from manufacturers for New Inventions of merit, Patented or Unpatented, Cash or Royalty. If will sell, **write us today** for a FREE PROTECTIVE DISCLOSURE FORM, Descriptive Booklet, References and Full Particulars of our services to inventors. NO OBLIGATION. A post-card will do! Address:

THE INVENTION REPORTER
2E-11236 So. Fairfield Ave., Chicago, Ill.

"HANDY MAN'S HOME MANUAL"
is the title of a 144-page book that should be in every home. Contains hundreds of useful ideas, kinks, short-cuts, etc., that save time and money for home owners. Only 50 cents a copy at your newsstand or postpaid from **FAWCETT PUBLICATIONS, Inc.**
Fawcett Building Greenwich, Conn.

A COMPLETE SERVICE FOR INVENTORS

Specializing in:

1) PATENTS—patents obtained through registered patent attorney. Write for free details.
2) DESIGNING & DEVELOPING—of your ideas and inventions. Designs and technical prints prepared.
3) MODELS—built to "put over" your ideas. Can serve as samples. Experts in plastic materials.
4) DIES, TOOLS, patterns, castings, metal stampings, etc.
5) MANUFACTURING—in any quantities.
6) MARKETING—of your inventions.

Write today for the R. & S. "4-Points of Service" bulletin. Also, bulletin describing development of actual case.

R. & S. ENGINEERING CO., Dept. CD2, 17 East 42nd St., N.Y.C.

CONTENTS—Continued from page 10

PHOTOGRAPHY

Powerful Midget Flash Bulb - - - - - - 50
Efficient Negative File - - - - - - - - 78
Water Drop Reflections - - - - - - - - 79
Cardboard Sandwich Dries Print - - - - 79

RADIO AND ELECTRICITY

Giant Antenna Tower - - - - - - - - - 43
Directional Microphone For Crowds - - - 50
Unusual Television Aerial - - - - - - - 67

MISCELLANEOUS

New Type of Basketball Game - - - - - - 50
Sun Supplies Heat For House - - - - - - 60
Ski Patrol Aids Injured - - - - - - - - 61
Glasses To Enhance Beauty - - - - - - - 64
Skiing Like Flying With Bat-like Cape - - 66
First Typist And Her Machine - - - - - 67
City Girls Milk Dummy Cows - - - - - - 71
Byrd Hasn't The Only Snow Cruiser - - - 73

HOW TO BUILD SECTION

Introduction - - - - - - - - - - - - - - 80
Carve Yourself A "Rubaiyat" - - - - - - 81
Mount Vernon Playhouse - - - - - - - - 89
"Ice Lizard" - - - - - - - - - - - - - - 90
Make This Snow Boat - - - - - - - - - - 92
Ice Tops - - - - - - - - - - - - - - - - 92
Lead Skate Sheath - - - - - - - - - - - 92
Sheepskin Helmet And "Mocs" - - - - - - 93
Garage Snow Guards - - - - - - - - - - 93
Book Ends For A Man's Den - - - - - - - 94
Oil Drum Stoves - - - - - - - - - - - - 98
Modernistic End Table - - - - - - - - - 99
Make Your Own Sailboat Fittings - - - - 100
Marine Lamp For Beach Cottage - - - - 102
Two-Toned Bracelet Is Profit Project - - - 103
Antelope Ornament - - - - - - - - - - 104
Knock-Down Portable Shelf - - - - - - 105
Help For The Householder - - - - - - - 106
Hints For The Motorist - - - - - - - - 108
Improvised Battery For Testing Earphones - 110
Novel Telephone Lamp - - - - - - - - - 110
Spring Holds Electric Wire - - - - - - - 110
Trouble Shooter's Cord - - - - - - - - 110
Bringing In The Lead-in - - - - - - - - 111
Adjustable Enlarger Table - - - - - - - 112
Darkroom Uses For Radio Parts - - - - 113

On His Record—
Which Man Would YOU Hire?

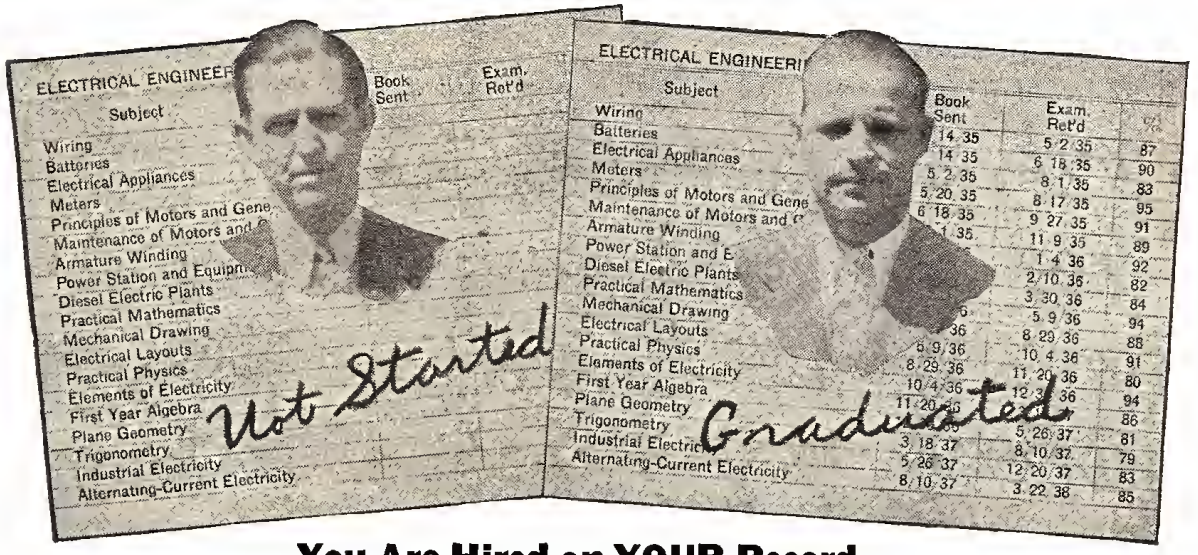

You Are Hired on YOUR Record—
Employers Want to Know, Are YOU Prepared for Promotion

Your own ability to hold the better jobs depends entirely on the preparation you have made to accept the **opportunities offered every month in the year** in the active fields of today such as Air Conditioning, Diesel Engineering, Drafting and Design, etc. Men in these fields and others with preparation as accountants and in merchandising are being advanced into such openings as department heads, managers, foremen, superintendents, travelling auditors, etc.

Your opportunity today simply means being **ready** for the good jobs looking for good men—your chance for a worthwhile position depends on whether or not you will prepare to meet the demands of employers all over the country who are offering the big jobs to men who can handle them!

Without training a man is no more valuable at 40 than at 30, is old at 50. But the doctor at 40 or 50 is a better doctor than he was at 30—and it's the same with men trained in other fields—executives, draftsmen, engineers, merchants, architects **are young at 40, at 50**—and still have many good pay years ahead. Promotion, increased pay, reward properly prepared men!

American School, an educational institution incorporated "not for profit," has used for over 40 years a direct and practical method for preparing men to handle the **bigger jobs in business and industry.**

American School graduates hold important positions as engineers, accountants, experts, draftsmen, managers, etc., or successfully operate their own business. Thousands of our High School graduates have entered colleges, universities, normal schools, etc., have attained success in business or industry.

Find out how American School can help YOU, the difference it may make in your entire future **success** and **happiness!** Mail coupon today for **free** Bulletin and early lesson in field of your choice. No obligation on your part.

American School, Dept. G228, Drexel Ave. at 58th St., Chicago

Cut Along This Line

Try a Lesson Yourself—No Obligation

American School, Dept. G228, Drexel Ave. at 58th St., Chicago

I have checked the line of work in which I would like a good job. Please send me without expense or obligation on my part a copy of your Bulletin and an early lesson in the field I have selected.

- ☐ Air Conditioning
- ☐ Architecture
- ☐ Automotive Engineering
- ☐ Automobile Repairing
- ☐ Bookkeeping and Cost Accounting
- ☐ Business Management
- ☐ Civil Engineering
- ☐ Aviation
- ☐ Contracting, Building
- ☐ Electrical Engineering
- ☐ Diesel Engineering
- ☐ Drafting and Designing
- ☐ Electric Refrigeration
- ☐ Heating, Ventilating, Plumbing
- ☐ Professional Accounting Incl. C. P. A. Coaching
- ☐ High School
- ☐ Highway Engineering
- ☐ Law
- ☐ Liberal Arts (College)
- ☐ Mechanical Engineering
- ☐ Merchandising
- ☐ Private Secretary
- ☐ Radio and Television
- ☐ Salesmanship
- ☐ Shop Practice
- ☐ Shop Management
- ☐ Steam Engineering



*Name*_____ *Age*_____ *Occupation*_____

*Street*_____ *City*_____ *State*_____

Chips from the Editor's Workbench

Send in photos of your completed workshop projects. Each month MECHANIX ILLUSTRATED awards a first prize of $5 for the best photo and letter received by this department and prizes of $3 each for all other photos and letters used. Do not send negatives. Have copies of your photos made before you submit them, as NO PHOTOS WILL BE RETURNED.

"Your Job"

YOUR editor was gratified to read some wise advice to young men recently offered by William S. Knudsen, president of General Motors. His advice took the form of what he would do if he were a young man under thirty and not yet settled in his life's work. He said, "I would apprentice myself to a mechanic or plumber," and he went on to advise youths to work with their hands, to learn how to make things, even though they might be college graduates. Knudsen should know. He rose from the position of mechanic to the presidency of the largest automobile manufacturing company in the world.

You see, we feel the same as does Mr. Knudsen and that is why we are publishing the series "Your Job," the second article of which appears in this month's MI.

The purpose of the series is, of course, to enable youths and adult men with mechanical interests or inclinations to select a trade or business that fits them, that will make them happy, and that will pay the biggest possible financial return for their investment of energy and ability.

If we could afford it, we would advertise this series everywhere, over the radio, in the newspapers. One of our associate editors even wanted to hire an airplane and tour the country with skywriting equipment, flashing an advertisement for the "Your Job" series over every town and city.

Too bad we can't give the series the advertising it deserves, but *you* can help us advertise it, if you will. Tell your friends about it, and be sure yourself to read and file each article as it appears. When the series is finished we will have presented the important facts about every mechanical trade. As far as we have been able to learn, no extensive investigation of these trades and their possibilities for the individual has ever before been published. You can't get these facts at your public library or from any other source, but you *can* get them from MI.

Let us know how you like the series. Some of you have already written valuable letters containing pertinent suggestions, and we are paying particular attention to requests for articles on specific trades.

Quite a few persons, mostly teachers and parents, have written in for extra copies of the January issue, which featured the trade of auto mechanic. We are glad to supply these as long as copies are available, at 10c each, postage paid. Send your requests to Circulation Department, Fawcett Publications, Inc., Greenwich, Conn. However, send all comments and suggestions

[*Continued on page* 16]

The Warner Brothers cameraman goes aloft to take air views of La Guardia Field, New York, for a MECHANIX ILLUSTRATED-Vitaphone movie "short". (Look for it at your local theatre!) The big color camera was mounted just behind the pilot's compartment of a giant American Airlines transport, and recorded every activity of the busy fliers as they took the ship up for a flight over the airport. These pretty student-hostesses were interested observers.

THESE FREE BOOKS ARE FOR INVENTORS

AND OTHER MEN WITH IDEAS

"We're only entering the great period of inventive advancement"

—says C. F. Kettering, Vice-Pres., General Motors

SOMETIMES we hear people say: "Well, there isn't much left to invent." But Charles F. Kettering, Vice-Pres. and head of Research of General Motors, who helped develop the self-starter, Duco and many other outstanding inventions, **doesn't think that at all.** Not long ago in a published statement, he said:

"If we took half the men employed in tool making and put them to working out new inventions, new things, we could snap out of this depression in no time. Our return to normal times depends on new manufactured products that will catch the purchaser's eye, get him to buy and thus start the ball rolling. Change and buying go together. ***We are only entering the great period of inventive advancement."***

Many Little Ideas Have Big Commercial Possibilities

Some of the world's best inventions came from men who didn't consider themselves inventors at all. The telegraph was invented by a painter, the typewriter by a farmer, the hand camera by a bank-clerk, the stock ticker by a dentist. Or look at small inventions. A husband noticed his wife bending a hair pin to make it stay put. That gave him the idea of the crinkly hair pin. One day a golfer got the idea to make a wooden tee. Now wooden tees are sold by the millions every year. There are many similar examples in inventive history. That is why we say that the books shown here are for INVENTORS and Other Men with IDEAS. Whether you consider yourself an inventor or not—**if you have an idea that will make money, save time, save labor, or give pleasure**—find out how you can protect your rights to it.

Our Business Is To Help You

For forty-two years, this organization has been in the business of helping inventors. During that time inventions from every corner of the country have been turned over to us to protect. Some ideas have represented complicated mechanisms; others have been small, practical articles, like a can opener or a new toy. All this has given us a wealth of experience to use for the inventor of today. Here in Washington, we maintain a large staff of experienced Patent Specialists to give you prompt and expert service. Yet because we work efficiently—our fees are low, and if desired we help you with deferred payments. But first, find out exactly what to do to protect yourself. **Decide on that today by sending for your FREE copies of the books shown above.**

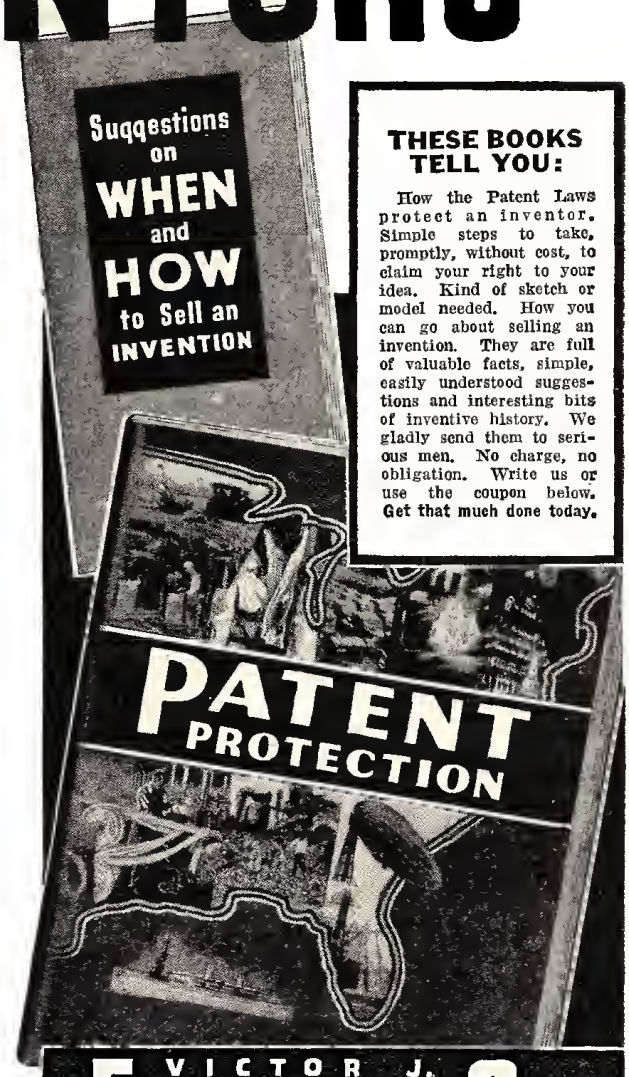

THESE BOOKS TELL YOU:

How the Patent Laws protect an inventor. Simple steps to take, promptly, without cost, to claim your right to your idea. Kind of sketch or model needed. How you can go about selling an invention. They are full of valuable facts, simple, easily understood suggestions and interesting bits of inventive history. We gladly send them to serious men. No charge, no obligation. Write us or use the coupon below. **Get that much done today.**

VICTOR J. EVANS & Co.

REGISTERED PATENT ATTORNEYS
MAIN OFFICE: 580-B, VICTOR BUILDING
WASHINGTON, D. C.
Pittsburgh Office: 514-B, Empire Building

Send me FREE copies of your books, "Patent Protection" and "When and How to Sell an Invention."

Name .....

Street and No. .....

City or Town..... State.....

INVENTORS
PATENT YOUR IDEAS
SEND FOR FREE BOOK



HOW TO OBTAIN A PATENT

Written by a Former Member of the Examining Corps (1922-24) of the U.S. Patent Office. If you want to profit by your idea, you should take steps to apply for a U. S. Patent at once. Your first step is to get this Free Book. This interesting illustrated book contains valuable information you should have. It tells you fully how to obtain a patent on your idea in the quickest way. With this Free Book you will also receive a "Record of Invention" form on which you can easily record your idea. Personal and Confidential Service: Your case will be personally handled only by a Registered Patent Attorney who is also a Former Member of the Examining Corps of the U. S. Patent Office. All communications confidential.

MAIL COUPON TODAY for FREE PATENT BOOK and RECORD OF INVENTION Form

CARL MILLER
REGISTERED PATENT ATTORNEY
FORMER MEMBER EXAMINING CORPS U. S. PATENT OFFICE

Woolworth Bldg., 35th Floor, Dept. 20-B, New York City
MILLER BUILDING, Dept. 20-B, WASHINGTON, D. C.
Please send me your Free Book, "How to Obtain a Patent," and your "Record of Invention" form.

NAME .....

ADDRESS .....

INVENTORS:

GET MY NEW FREE BOOK. Use my personal, confidential patent service. Send for free facts on patenting your invention. Also suggestions on financing a patent application. Reasonable fees. Deferred payment arranged. Write HUGH E. McMORROW, Registered Patent Attorney, Dept. 320-F, Barrister Building, Washington, D. C.

New Ideas now Salable Before Patenting

Practical, useful inventions may be safely marketed without patenting expense. Write for proof that we successfully sell patented and unpatented inventions.

CHARTERED INSTITUTE OF AMERICAN INVENTORS
Dept. S-C, Barrister Building Washington, D. C.

PATENTS
PERSONAL SERVICE

My *Personal* service assures strictest confidence on all your patent problems. Send me a model or drawing, or sketch and description of your invention, and $5.00. I will make a search and report promptly as to its patentability and send you a copy of my 72-page booklet. Or, if you prefer to read my booklet first, write today for FREE copy. Registered Patent Attorney.

L. F. Randolph, 761 Victor Building, Washington, D. C.

Be a RADIO SERVICE EXPERT
LEARN AT HOME IN SPARE TIME

Clear, simple, fascinating lessons—practical work with experimental kits—make training easy and fast. Up to date R.T.A. methods, under personal guidance of prominent engineer and educator, highly endorsed by leaders in radio industry. Spare-time profits soon pay for training.

START *NOW*— have your own business or fit yourself for well paid work with radio dealers, in factories, police, marine or television fields. DON'T DELAY! Send AT ONCE for complete information and Big Opportunity **BOOK *FREE!***

RADIO TRAINING ASSOCIATION OF AMERICA
4525 Ravenswood Ave., Dept. MI-20, Chicago, Ill.

Editor's Workbench Chips

[*Continued from page* 14]

A $5 check is winging its way to Henry Bachman of Emmaus, Pa., for the tri-cycle motor scooter he built. One rear wheel is for braking and the other is the drive wheel, while the pair combine to balance the machine. Bachman's scooter will go 30 miles an hour in high speed and will travel about 70 miles on a gallon of gas. He uses a belt drive with a clutch so he can stop at red lights without shutting off his motor. Bachman, who is a student at Penn State, ought to find this nifty little scooter a bandy means of getting from class to class.

about the "Your Job" series itself to me at the MECHANIX ILLUSTRATED Editorial Offices, 1501 Broadway, N. Y.

***

Seeing Is Believing

"Do readers of your magazine really build all those gadgets described in it, or do you run the articles just because the plans look attractive?" This question . . . I might say challenge . . . was thrown at me recently by a visitor. So I gathered a big armful of letters from the file, spread them over a desk, and invited him to see for himself. After ten minutes of silent reading, punctuated only by mutters and exclamations of surprise, he excused himself.

"I never realized before the extent of this home-shop activity," he said.

Before putting the letters away, we decided to study a representative batch of them closely. We obtained some interesting facts, and I'm sure you like to read them.

Nothing is too big or complicated for MI readers! Name anything that a man can make with his hands and it's on the list: boats, in all sizes

[*Continued on page* 18]

NOW . . . YOU CAN ESTABLISH A PERMANENT and PROFITABLE BUSINESS IN YOUR OWN TOWN . . . Plating Gold, Silver, Copper, Tin, Cadmium and Nickel at Big PROFITS!

MAKE BIG MONEY AT HOME-*Electroplating*

Amazing New Brush and Tank Methods!

Patented Warner System Based on New, More Profitable Methods!

WARNER engineering has now achieved the impossible! High capacity, professional plating equipment at amazing low cost! *No expert knowledge now necessary!* Combines both improved methods—brush and tank. Though priced low, it has capacity for producing more than $12,000 volume per year. **You invest only once for permanent, profitable, lifetime business.** No job too big, no job too little for you to handle at a nice profit.

SMART OPERATOR CAN GET BACK INVESTMENT IN 2 WEEKS!

Warner Electroplating System pays for itself in double quick time. Everything's included . . . Super Power Pack, three Longlife Plating Tanks, Lectro Plating Brushes, Electric Polisher and Buffer, Automatic Electrically-Controlled Cleaning Tank, Anodes, Chemicals, etc. **Nothing else to buy. You make good money on very first job!**

Have you the vision to see and grasp a real opportunity? Are you capable of handling a proposition that can make you a prosperous business leader in your community? THEN—MAIL THE COUPON AT ONCE. *Investigate*—learn the facts without obligation. Don't dream . . . *act now!* VALUABLE FRANCHISE IF YOU CAN QUALIFY!

FREE SAMPLE PROVES CLAIMS

2 MINUTE DEMONSTRATION with SAMPLE AMAZES EVERYBODY!

Send today for FREE sample and interesting profit details and bona fide evidence of big, steady earnings.

Customers Galore . . . Every Home, Office, Factory, Shop and Store!

Today's demand for plating can support ten times present facilities. Making old articles new is an untouched field. *W. R. Dixen, Kansas City, writes:* "Made $10.00 in 3 hours." A. M. Holland, Minneapolis, says: "Earned cost of plater first week." *L. White, Perry, N. Y., states: "I've done 25 jobs so far."* WARNER EQUIPMENT NOW USED BY BETHLEHEM STEEL CORP., U. S. NAVY, STANDARD OIL, COLUMBIA BROADCASTING SYSTEM, STATE OF MINNESOTA.

TEAR OUT-MAIL AT ONCE!

WARNER ELECTROPLATER CO.,
Dept 12-P, 360 No. Michigan Ave.,
Chicago, Illinois

Please rush photos, facts, free sample and full information on "*How To Make Money At Home—Electroplating.*" Also—details covering your License Agreement.

NAME.....

Address.....

City.....State.....

FOR MEN WHO WANT TO LEARN A PROFITABLE TRADE

Complete

DIESEL

TRAINING

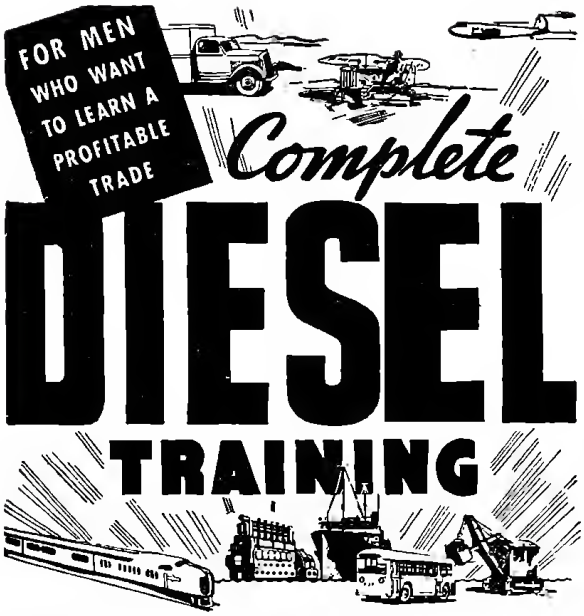

NO MATTER WHERE YOU ARE OR WHAT YOU DO

We have a training plan for YOU!

IF you are sincerely ambitious and interested in making good in the Diesel field, be sure to immediately investigate our flexible training plan that will fit your circumstances. A Plan for every Man. A Plan for those seeking immediate shop training as well as for those who cannot give up their present employment and income. For 34 years National Schools, a recognized leader in the field of trade education, has helped wide-awake men to success. This million-dollar trade school will supply you with a sincere, honest statement of facts of what you should do to quickly get into the profitable Diesel Industry. No exaggerations—no misstatements; and a definite plan to fit you.

WRITE TODAY FOR FULL DETAILS

Mail the coupon below. Find out how you can get the finest in Diesel training without delay. See how this great trade school operates and makes its facilities available to every ambitious man. Actual work in modern training shops, a part of every man's instruction. Shop methods time-tested for 34 years. Fascinating, efficient preparation. Get the facts.

We are definitely interested in helping men of limited income and "Blind Alley" job holders

NATIONAL SCHOOLS



Los Angeles, Calif.

Complete Training in Diesels and Gas Engines

Oldest Trade School in West

MAIL COUPON FOR FREE LITERATURE

Request for Free Literature

NATIONAL SCHOOLS (established 1905) Dept. MMA-2
4000 South Figueroa Street, Los Angeles
Please send me, without obligation, your literature and information.

NAME _____AGE _____

ADDRESS _____CITY _____STATE_____

Editor's Workbench Chips

[*Continued from page* 16]

from 4-foot lake skiffs to ocean-going ketches; model airplanes, from rubber-band babies to gas-engine jobs almost big enough to fly their owners; radio receivers and transmitters that talk around the world; powered bikes, motor scooters and midget automobiles; tractors and labor-saving farm machines of many kinds; *everything* connected with photography, including even cameras; furniture for every room of the house; model railroad systems; reflecting telescopes; doll houses; and so on no end.

One of the big surprises was the age of the shop cranks. The general impression is that only 'teen age boys build model airplanes or stay up nights with short-wave radios. If they stay up with anything, it's usually their girl friends! As hobbyists, they're far outnumbered by married men, who have jobs and homes (and money!) and use their children as excuses for their cellar shop activities. Letters like this are received in almost identical form from readers all over the country:

"Enclosed find pictures of a sidewalk runabout I built from your plans for my eight-year-old son. It is powered by a half-horse engine and does 20 miles per hour."

Imagine little Junior chugging down the street in a one-lung gas chariot while the local cop looks on beamingly! Pop just won't admit he built the car because he had a lot of fun doing so.

Workshop enthusiasts are everywhere! You're very wrong if you think shops are found only in the cellars of suburban homes. Some of the most elaborate projects we've seen were hand-crafted by apartment dwellers whose entire tool collection fits into an overnight bag and whose work-

[*Continued on page* 19]

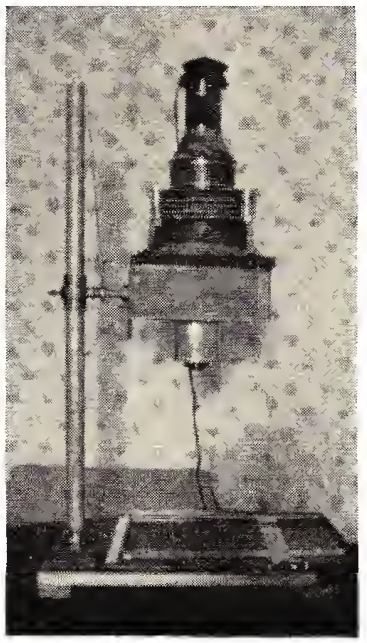

"We're jealous!" write the Misses Lorene Stemm and Mildred Bennett of good old Louisville, Kentucky, suh! "Three boy friends of ours all won prizes before we thought of sending in a picture of the enlarger we constructed from plans in March, 1938 MI. We have been using it since last summer and it works perfectly." So to keep the girls from being jealous, we are sending them a $3 prize for a very nice enlarger. The boys are the ones who should be jealous of your workmanship, girls!

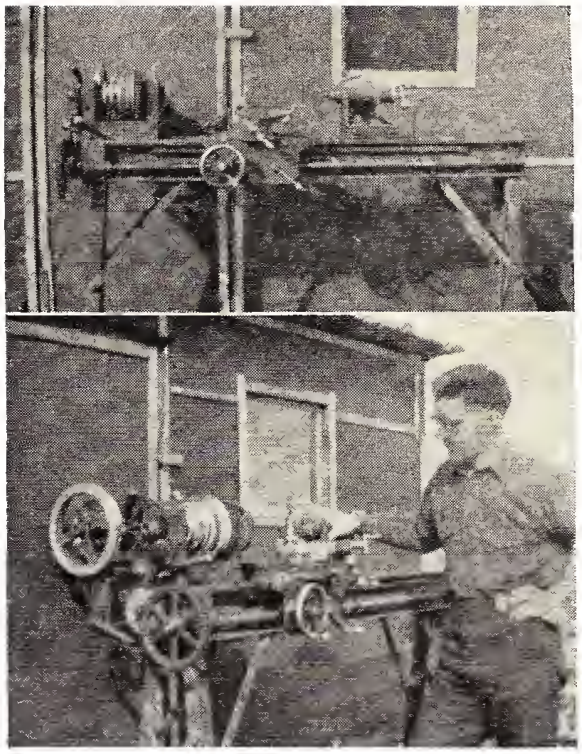

Up in Spiritwood, Saskatchewan, there is joy in the heart of Gerard Fontaine because of the $3 prize he received for the above photos of his home built lathe. He used parts from cars, tractors, sewing machines, washing machines and threshing machines, as well as scrap iron and aluminum. Total cost of the job was $15. The tool has all the features of a modern back geared, screw cutting lathe.

bench is the kitchen table. We've received pictures of excellent shops built into clothes closets; an old dresser revamped to hold a small lathe; a spare bathroom converted into a darkroom.

Are power tools in wide use? I'll say they are! And their owners are by no means what you'd call rich or well-to-do. Cellar shops that look like a corner of the Ford factory are owned by bus drivers, elevator operators and cooks. How do they do it? By careful saving and sheer determination. Many a hobbyist will lunch for months on coffee and cigarettes and buy a long-coveted tool with the money thus saved.

I offer the following as my definition of a shop crank: A man who owns a lathe, a scroll saw and a drill press, and walks to the station each morning to save bus fare. More power to him!

***

We're in the Movies Now

We are highly gratified by the many complimentary letters readers send us after they have seen one of the MECHANIX ILLUSTRATED-Vitaphone movie shorts. Photographed in color and produced by Warner Brothers, under the direction of Ira Genet, these films are widely welcomed as interesting, educational, and entertaining. A huge amount of effort goes into them,

[*Continued on page 20*]

Linoleum top converts table for practical kitchen use!

Size table top with one coat of CASCO. Sand when dry. Apply second coat and roll or iron linoleum or oilcloth onto top.

For details, send coupon below for free CASCO GLUING GUIDE. Gives *dozens* of practical household gluing hints.



Here's *one* glue that does *many* jobs! Because *you* mix CASCO, you can mix it to just the right consistency for *any* materials—and make joints that resist heat, moisture, rough handling.

CASCO is easy to use. No heating. No mess. Just add water and mix. You get the same clean, easy-spreading glue that leading furniture manufacturers and wood-workers use for *permanent* joints. 10¢ to 65¢ at hardware stores.

NEW ODD-JOB CEMENT

Used by big industries, now in handy tubes for home, school, office. Sticks wood, felt, fabric . . . to metal, plastics, glass. Doesn't "gum" on fingers. Large tube, 25¢ at hardware stores.

FREE Handy Workshop Folders

CASEIN COMPANY OF AMERICA, Dept. MI-240
350 Madison Avenue, New York, N.Y.

Please send me free folders checked below:

☐ **HOME WORKSHOP HANDBOOK.** Tells where to get free and low-cost booklets on every workshop subject.

☐ **GLUING GUIDE.** Complete gluing directions and 70 successful home uses for CASCO GLUE.

☐ **PROJECT FOLDER.** Descriptions of 24 popular projects available in plan form to CASCO users.

☐ **CASCO FLEXIBLE CEMENT FOLDER.** Directions, suggestions for home, school and office.

*Name*_____

*Address*_____

----Save 2c. Stick coupon on penny postcard----

AUDELS Carpenters and Builders Guides 4 vols. $6

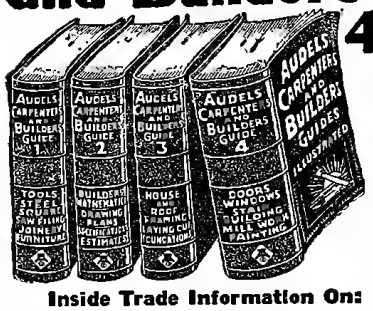
AUDELS CARPENTERS AND BUILDERS GUIDE 1
AUDELS CARPENTERS AND BUILDERS GUIDE 2
AUDELS CARPENTERS AND BUILDERS GUIDE 3
AUDELS CARPENTERS AND BUILDERS GUIDE 4
AUDELS CARPENTERS AND BUILDERS GUIDES ILLUSTRATED

Inside Trade Information for Carpenters, Builders, Joiners, Building Mechanics and all Woodworkers. These Guides give you the short-cut instructions that you want—including new methods, ideas, solutions, plans, systems and money saving suggestions. An easy progressive course for the apprentice and student. A practical daily helper and Quick Reference for the master worker. Carpenters everywhere are using these Guides as a Helping Hand to Easier Work, Better Work and Better Pay. To get this assistance for yourself, simply fill in and mail the FREE COUPON below.

Inside Trade Information On:

How to use the steel square—How to file and set saws—How to build furniture—How to use a miter box—How to use the chalk line—How to use rules and scales—How to make joints—Carpenters arithmetic—Solving mensuration problems—Estimating strength of timbers—How to set girders and sills—How to frame houses and roofs—How to estimate costs—How to build houses, barns, garages, bungalows, etc.—How to read and draw plans—Drawing up specifications—How to excavate—How to use settings 12, 13 and 17 on the steel square—How to build hoists and scaffolds—skylights—How to build stairs—How to put on interior trim—How to hang doors—How to lath—lay floors—How to paint

THEO. AUDEL & CO., 49 W. 23rd St., New York City

Mail Audels Carpenters and Builders Guides, 4 vols., on 7 days' free trial. If O.K. I will remit $1 in 7 days, and $1 monthly until $6 is paid. Otherwise I will return them. No obligation unless I am satisfied.

Name.....

Address.....

Occupation.....

Reference..... MM

We supply you 20 separate outfits of Electrical Equipment and Apparatus at no extra cost to help you learn Practical Electricity in your own Home Shop. No previous experience or advanced education necessary. Lifetime Employment Service. Write for Big Free Electrical Book **Today!** No obligation.

ELECTRIC INSTITUTE, Dept. 40-B, **Hinsdale, Ill.**

Yes, you can make extra money right at home, and have real fun doing it. We show you how, we furnish everything necessary on an easy basis.

COSTS NOTHING to learn about our plan, all details are given you free. Write today for idea book full of colored pictures telling all about our methods which have made money for so many people. Learn how easy it is to make up to $10 to $25 in a week in the most delightful home work you can imagine.

Write Now—It's FREE!

FIRESIDE INDUSTRIES, Dept. 142-B, Adrian, Mich.

Editor's Workbench Chips

[*Continued from page* 19]

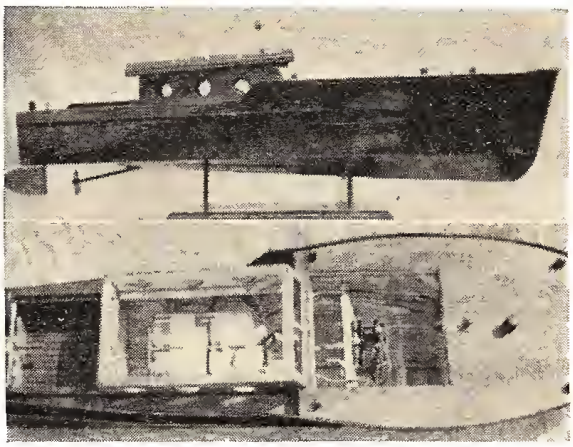

This model cabin cruiser cops an award of $3 for Boyd Small of Vincennes, Ind. It is 36 inches long and constructed of balsa wood. No nails were used, all parts being held together with pins and glue. A motor run by four 1½-volt battery cells wired in a series drives a 1¼-inch propeller. The boat has a speed of about five miles an hour.

and Mr. Genet and his untiring camera crew go everywhere in their search for lively subjects. For instance, to get some air shots of New York's giant new airport, La Guardia Field, they went aloft in a giant American Airlines 21-passenger "Flagship" (see picture on page 14), and spent almost a full day getting some thrilling scenes that will take about 50 seconds screen time!

If your local movie house hasn't yet booked the MECHANIX ILLUSTRATED-Vitaphone shorts, drop us a card with the name and address of the theatre and we'll see what can be done about it.

***

Bang! Bang!

The present European war proves the danger of prediction. Before it started, everyone believed that the German air force was invincible and would rain death and destruction on Paris and

[*Continued on page* 21]

This house trailer is a prize winning contribution to the Workbench of Howard Keas of Dyer, Tennessee. The trailer, which is 16 feet long and weighs 1,500 pounds, has electric lights, a davenport, a small kitchen cabinet, a clothes closet, a dinette and chairs, and small cabinets all around the edge of the ceiling. The top is covered with canvas and painted silver and the sides are made of used tin. It looks like a mighty comfortable house on wheels in which to tour the country.

Remember the water skiis described in the September, 1939 issue of MI? Theodore Stack, of Cohoes, N. Y., followed the plans exactly, and even posed these pictures of himself to resemble the ones published with the article. Why not build a pair of these skiis for yourself, for water fun this summer? Do the work now, while the cold weather keeps you indoors, and have them ready for the first warm spell.

Berlin; that Great Britain's powerful navy would rule the seas; that Russia's long-famed "parachute army" would drop behind its enemy's lines and raise havoc there.

And what's actually happened? All the scientific experts were wrong! French pilots, flying half-obsolete American-built Curtiss pursuit planes, have swept the much-overrated German Messerschmidts from the skies. Even the British, with ships that still use wooden propellers, have repulsed one air raid after another. Meanwhile, their proud navy has suffered severe damage from puny German submarines and "magnetic mines," the latter a 1916 idea that everyone else forgot about completely. The Russians pull their silly parachute trick on the fighting Finns and promptly get themselves wiped out.

Some of those master-mind generals and admirals should read MI occasionally and get some real ideas from our artists' drawings!

***

For Modellers

A new book which should be of great interest to boat enthusiasts in general and sailing-ship model builders in particular is "Square Riggers Before The Wind"* by Capt. Josiah Grundy and Wilkins W. Wheatly, the latter a frequent contributor to our how-to-build section. The book tackles the subject of sailing ships and the building of models thereof from an entirely fresh and original angle, treating them as things of living beauty rather than relics of the past. About half its pages are devoted to the history of boats under sail and interesting accounts of typical voyages. This leads up to the second portion of the book, dealing with the construction of simplified scenic *action* models of full-rigged ships. The method of building these models was developed by Capt. Grundy, and they

E. P. Dutton & Co., Inc., New York, N. Y., $3.00

[*Continued on page 22*]

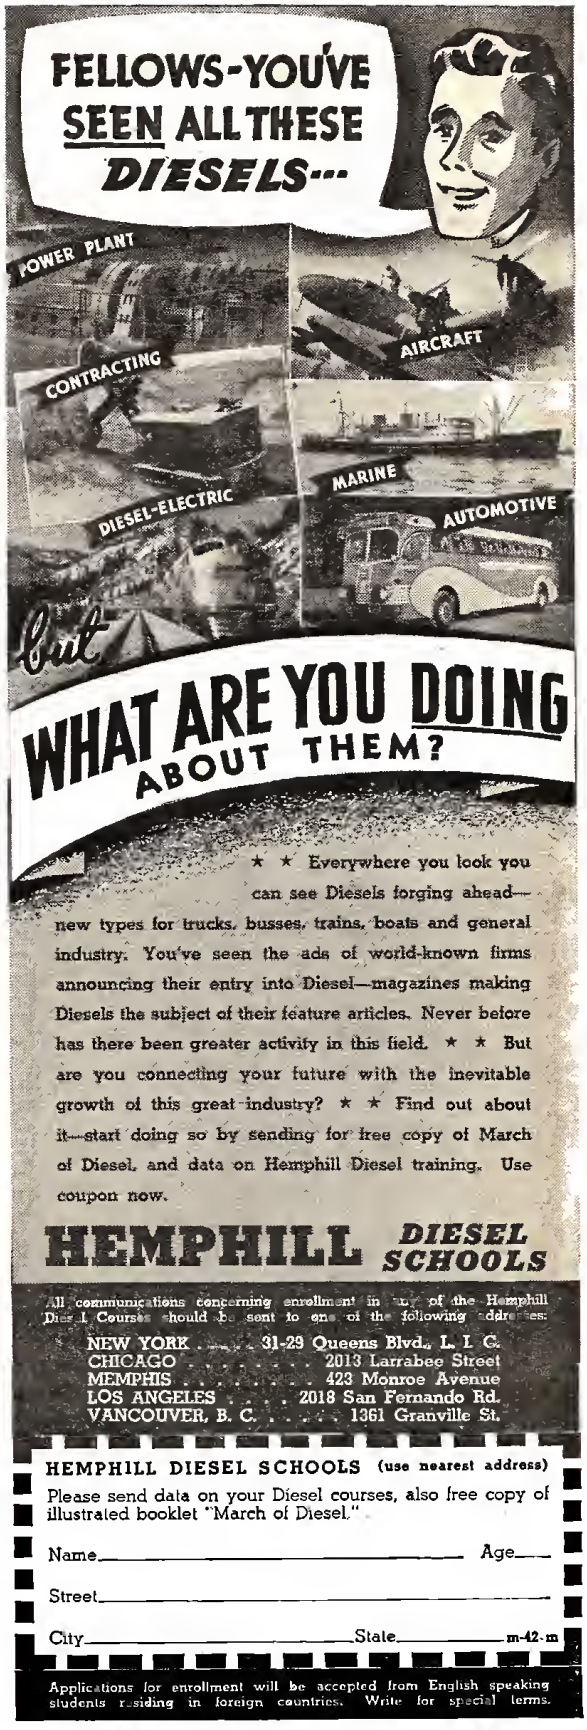
FELLOWS-YOU'VE SEEN ALL THESE DIESELS···
POWER PLANT
AIRCRAFT
CONTRACTING
MARINE
DIESEL-ELECTRIC
AUTOMOTIVE
but
WHAT ARE YOU DOING ABOUT THEM?
★ ★ Everywhere you look you can see Diesels forging ahead—new types for trucks, busses, trains, boats and general industry. You've seen the ads of world-known firms announcing their entry into Diesel—magazines making Diesels the subject of their feature articles. Never before has there been greater activity in this field. ★ ★ But are you connecting your future with the inevitable growth of this great industry? ★ ★ Find out about it—start doing so by sending for free copy of March of Diesel, and data on Hemphill Diesel training. Use coupon now.
HEMPHILL DIESEL SCHOOLS
All communications concerning enrollment in any of the Hemphill Diesel Courses should be sent to one of the following addresses:
NEW YORK . . . . . 31-29 Queens Blvd., L. I. C.
CHICAGO . . . . . 2013 Larrabee Street
MEMPHIS . . . . . 423 Monroe Avenue
LOS ANGELES . . . . 2018 San Fernando Rd.
VANCOUVER, B. C. . . . . 1361 Granville St.
HEMPHILL DIESEL SCHOOLS (use nearest address)
Please send data on your Diesel courses, also free copy of illustrated booklet "March of Diesel."
Name_____ Age____
Street_____
City_____ State_____ m-42-m
Applications for enrollment will be accepted from English speaking students residing in foreign countries. Write for special terms.

Learn this Profitable Profession

. . in 90 Days at Home

Hundreds of men and women of all ages 18-50 make $10.00 to $20.00 in a single day giving scientific Swedish Massage and Hydro-Therapy treatments. There is a **big demand** from Hospitals, Sanitariums, Clubs, Doctors and private patients as well as opportunities for establishing your own office.

Learn this interesting money-making profession in your own home by mail, through our home study course. Same instructors as in our NATIONALLY KNOWN resident school. A diploma is awarded upon completion of the course. Course can be completed in 3 to 4 months. High School training is not necessary. Many earn big money while learning.

Anatomy Charts & Booklet FREE

Enroll now and we will include uniform coat, medical dictionary, patented reducing roller and Hydro-Therapy supplies without extra cost. The reducing course alone may be worth many times the modest tuition fee.

Send coupon now for Anatomy Charts and booklet containing photographs and letters from successful graduates. These will all be sent postpaid—FREE.

THE College of Swedish Massage (Successor to National College of Massage) Dept. 258—30 E. Adams St., Chicago.

You may send me **FREE** and postpaid, Anatomy Charts, booklet containing photographs and letters from graduates, and complete details of your offer.

Name .....

Address .....

City ..... State .....

LES A AD ASTRA E. ARDUA

Correspondence Courses In RADIO and ELECTRICAL ENGINEERING

SPECIAL Only $25

ELECTRICAL ENGINEERING Get good grasp of wide electrical field. Prepare yourself, at Low Cost, for secure future. Modern course. So simplified anyone can understand quickly.

RADIO ENGINEERING Extra fine course in radio, public address, photo-electric work. Trains you to be super-service man, real vacuum tube technician. Experimental kits furnished. Diploma given on completion. Tuition, ONLY $25, either course. Deferred payment plan available.

FREE! Send name quick for free copies of school catalogs, student magazines, complete details. SEND NOW.

LINCOLN ENGINEERING SCHOOL, BOX 931-M14, Lincoln, Nebr.

VECO

Calling All Cars

A MYSTERIOUS DISCOVERY



SAVES UP TO 30% on GASOLINE or Costs Nothing to Try

Stop wasting Gas!—trim dollars off gas bills—get more power—quicker pickup—faster acceleration! AUTO OWNERS *everywhere* praise VACU-MATIC! Proven so efficient, it is guaranteed to satisfy, or the trial costs you nothing.

Automatic Supercharge Principle

Vacu-matic is *entirely different!* It operates on the supercharge principle by automatically adding a charge of extra oxygen, drawn free from the outer air into the heart of the gas mixture. It is entirely automatic and allows the motor to "breathe" at the correct time, opening and closing as required. Saves up to 30% on gas costs, with better motor performance.

FITS ALL CARS

Constructed of six parts fused into a single unit, adjusted and *sealed at the factory.* Easily and quickly installed by anyone in a few minutes.

AGENTS Get Yours FREE

FOR INTRODUCING. Here's a splendid opportunity for unusual sales and profits. Every car, truck, tractor owner a prospect. Send name and address now for big money making offer and how you can get yours Free.

The Vacu-matic Co., 7617- 492 W. State Street, Wauwatosa, Wis.

Editor's Workbench Chips

[*Continued from page* 21]

Roy Gresens of Rochester, N. Y., wins a $3 prize for his version of MI's *Buzzer II*, which differs slightly from the original, for instead of using planking on sides and bottom, Gresens used a waterproof plywood. A Lockwood nine-horsepower engine pushes the craft along at a speed of from 20 to 25 miles an hour. Total cost of building was $23.50.

are about the most realistic we have seen, depicting as they do ships actually under sail, as contrasted to the usual static mantel model. Profusely illustrated, the book includes a glossary and two large plan sheets inserted in a pocket in the back.

***

The "Boat Book" Is Out!

The month of January is notable in boating circles for two reasons: the annual Motor Boat Show is held then in New York, and the new issue of HOW TO BUILD 20 BOATS appears at the same time. The fifth edition of this famous book is now on sale, and if you'll forgive us for saying so, it's pretty darn good. Increases in paper and printing costs notwithstanding, the price is still 50 cents a copy, and that buys 144 pages just bursting with plans and ideas. Run, do not walk, to the nearest newsstand.

***

A Little Reminder

It's always nice to have readers express themselves freely on various matters of mutual interest. Please feel free to write to us at any time, but please remember to include one little detail: your name and address! Many readers probably think our offer of a blueprint catalog, for instance, is a fake, because they wrote in and never received their copies. Their letters are probably in our "morgue," because they forgot to sign their names or give their addresses. And sometimes the addresses that are given are incorrect, and then large packages of blueprints roam around for weeks before the post office finally returns them to us, battered and broken, with the notation, "Addressee Unknown."

—*Robert Hertzberg, Editor.*

$200 My First Week ...Now in my OWN Business.

Free Book!
MAIL COUPON *now*

VON SCHRADER MFG. CO.
202 Pl., Racine, Wis.

Send at once (no obligation) your free booklet illustrating rug-washer and telling how I can own my own permanent business; how I can earn large profits at prices below other methods; how I can become financially independent in a short time; and how I can pay on easy terms.

Name.....

Address.....

City.....State.....

Would you, too, like to own a business where it is possible to take in as much as $200 your first week as did L. A. Eagles in his new business?

We want a reputable, honest man in each locality. This man need not have any special experience or more than ordinary ability, but he must be honest and courteous.

Such a man we will start in business for himself. You can make far above average profits in the rug-washing business—a high-grade business all your own. Many earn $125 to $200 per week—some considerably more.

NO SHOP NECESSARY

The rug-washer cleans rugs like new on the customer's floor. Anyone can run it. Electricity does the work. A quick, thorough and highly-efficient method that brings out the natural beauty of floor coverings.

There are hundreds of customers—in your vicinity and nearby towns. The business grows steadily. Simply wash a few rugs or carpets. These customers tell others and also give you their future work. Soon you will have a prosperous year-around business. Send coupon for booklet explaining everything.

"Profits Pay For Home"

Harry Hill built and paid for a home from rug-washer profits. His first day's business was $86. Another man writes, "Made $70 in 13 hours." A. L. Miller says, "Have had rug-washer 6 years—have earned as high as $92 a day." M. O. Malmin earned 3 times the cost of his machine the first two months. You, too, can enjoy a large income.

"Never a Complaint"

C. J. White says: "$100 business in six days—never a complaint." That is the nicest part of this business—every customer is more than satisfied. Stains and blotches disappear and vivid colorings and freshness in faded floor coverings come back.

EVERY MACHINE GUARANTEED

You take no risk. These machines have been manufactured since 1918 and are used by the United States Government and by many of the world's largest hotels. They are fully GUARANTEED.

EASY TERMS

The complete equipment is inexpensive. A reasonable down payment brings everything to you and the balance is paid monthly. From the start, you have your own business—one that is profitable and of which you can be proud.

MAIL COUPON *Today*

VON SCHRADER MFG. CO., 202 PL., RACINE, WIS.

HOME WORKSHOP FANS

Get full advantage from your shop by building that project you have long had in mind. No doubt you'll find it explained fully in the 1938 HOW-TO-BUILD-IT book which contains plans for making midget racers, auto trailers, furniture, radios, games and toys. Send your 50c now for this big 144-page book—contains 500 pictures and plans all in rotogravure.

Fawcett Bldg. FAWCETT PUBLICATIONS, INC. Greenwich, Conn.

WORK FOR "UNCLE SAM"

RAILWAY POSTAL CLERKS

$1260 to $2100 First Year

Mail Coupon Before You Lose It

City and Rural Carriers—Postoffice Clerks—File Clerks—Accountants—Stenographers—Typists—Many other Government Jobs.

FRANKLIN INSTITUTE, Dept. W255, Rochester, N. Y.

Sirs: Rush to me, without charge, copy of 32-page book, "How to get a U. S. Government Job," list of positions, and full particulars telling how to qualify for them.

Name .....

Address .....

You Should Get Into DRAFTING and Industrial DESIGNING

Get into a Better Pay field with a big future by learning DRAFTING and DESIGNING quickly from an Engineer and Industrial Designer. Private, individual training at your home. Drawing tools and table furnished without extra cost. Learn to draw and design new products, or to improve, re-style, streamline and modernize old products for more "eye appeal" and selling power.

Drafting is a very big field, but drafting with industrial designing is twice as big. Factories must continuously bring out new models, new products, and improved designs. You can learn both subjects right in your own home, in your spare time. You can be trained for better pay as I have trained many hundred successful students. I'll train you thoroughly by applied instruction on actual work until you are holding a good paying position. Send coupon for full facts on "Drafting and Industrial Designing." **ENGINEER DOBE, Libertyville, Illinois.**

Engineer Dobe, Div. 4742 Libertyville, Illinois. **SEND FOR FULL FACTS**

Please send me full facts on "Drafting and Industrial Designing." Also please explain how you assist your graduates to good positions in these fields.

Name..... Age.....

Address .....

Town..... State.....

BE A PASSENGER Traffic Inspector



Train Yourself in Your Spare Time

Write for Free Booklet describing our 21 years' experience in securing jobs for our graduates that pay up to $135 per month, plus expenses, to start. Opportunities in Railway and Bus. Easy, home-study course will prepare you this winter. **STANDARD BUSINESS TRAINING INSTITUTE, Div. 6102, Buffalo, N. Y.**

LEARN CHEMISTRY AT HOME

Complete 40 lesson HOME STUDY CHEMISTRY COURSE, by recognized authorities, (slightly soiled). ONLY $10.00; former price $145.00. Limited number of COMPLETE COURSES available at the low price of $10.00. Remit cash, stamps, check or money order. Full money-back-guarantee. FREE literature on request.

CHEMISTRY DIVISION, I-B, 128 E. 23 St., New York, U. S. A.

LET ME PROVE I CAN MAKE YOU A NEW MAN

I changed myself from a 97-lb. weakling to winner of title, "World's Most Perfectly Developed Man." Let me prove that my secret of Dynamic Tension can give you powerful muscle, smashing strength, a handsome build? All I ask is a 7 DAY TRIAL. Write for my 48-page FREE BOOK.

CHARLES ATLAS, Dept. 62, 115 East 23rd Street, New York City.

SEND FOR MY FREE BOOK

YOU CAN MAKE MORE MONEY

in the Composition Novelty Manufacturing Business. Reports of $100 a week or more are not unusual. Our Big 32-page Book explains and illustrates the secrets of this profitable money-making business. It's yours for only 10c. Send for it today!

STEWART'S STUDIO, Dept. M-2, 2927 Wilcox St., Chicago, Ill.

Build Your Own Racer Now! Be Ready For Spring!

Be "In The Know" On Latest Mechanical Developments And World's Record Cars.

How to speed up stock engines and make conversions. Complete instructions and working drawings on how to build frames and bodies. Read KUNS' ILLUSTRATED AUTOMOBILE RACING BOOKS, FOURTH AND FIFTH EDITIONS. FOURTH EDITION gives information on midgets; FIFTH, on dirt track racers and engine rebuilding. (Each book entirely different.) Order a copy NOW —$1.00, each postpaid; $1.15 C.O.D.

RAY F. KUNS, Dept. A-14, Madisonville, Cincinnati, Ohio

MAN WANTED

HANDLE ONE OF OUR BIG PAY ROUTES
Sell To Stores On New Plan

Carry a complete "Wholesale Supply House" in your hand. Let us start you making Big Money in permanent business of your own. Show Storekeepers in every business how to DOUBLE profits on Nationally Advertised Goods. Over 200 Products. No experience needed. We supply everything. Free Book gives amazing facts.

World's Products Co., Dept. 14-P, Spencer, Ind.

ATTENTION MOTOR REPAIRMEN!

You need this book of over 600 brand new A. C. Motor Diagrams, Tables, and Controller Connections. The material is designed especially to enable the practical electrician to better understand the various types of electric motors now in use. In the contents you will find: All standard single, two, and three phase circuits up to 12 path presented in a simplified form; A practical means for converting windings for a difference in voltage, phase, speed, or frequency; special dual voltage and multi-speed connections; the circuits, adjustments and repair of split phase, capacitator, series, and repulsion induction motors; means of testing motors for horse power; and numerous important tables. A more complete knowledge of motor circuits will place you in a position of greater earning ability. Send for your copy today! This book guaranteed satisfactory or your remittance promptly refunded. Price $2.00 prepaid.

Dept. MI, EDUCATIONAL ADVANCEMENT COMPANY, Lakewood, N. Y.

MAKE MONEY COLORING PHOTOS at Home

Fascinating new occupation quickly learned by average man or woman. Work full or spare time. Easy to understand method brings out natural, life-like colors. Many earn while learning. No canvassing.

Easy to Learn

Free Book tells how to make good money doing this delightful home work for studios, stores, individuals and friends. Send today for your copy. No obligation.

NATIONAL ART SCHOOL
3601 Michigan Ave., Dept. 2052, Chicago, U.S.A.

Lawn Ornaments

New, unique, colorful, easy to make from our patterns. 20 full size pattern birds, animals, etc., 25c. Dutch Windmill, 36 inches high, complete plans 25c. Dutch Boy, Dutch Girl, Sprinkling Girl, Fox Terrier Puppy, Scottie, Bull Dog, 15c each, or any two 25c. Entire collection only $1 postpaid.

WICKMAN COMPANY
Dept. 145, 744 Brooklyn Ave., Dayton, Ohio

MAIL ORDER BUSINESS

Your Big Opportunity!

Learn how to make money from home or office, spare or full time. Up-to-date copyrighted home study course. Widely endorsed. Teaches professional mail order technique; not penny-catching schemes. Sound instructions by successful money-making experts.

Write for FREE details today. No obligation.

NELSON CO., B-401 Manhattan Bldg., Chicago

Bugs Wired For Sound

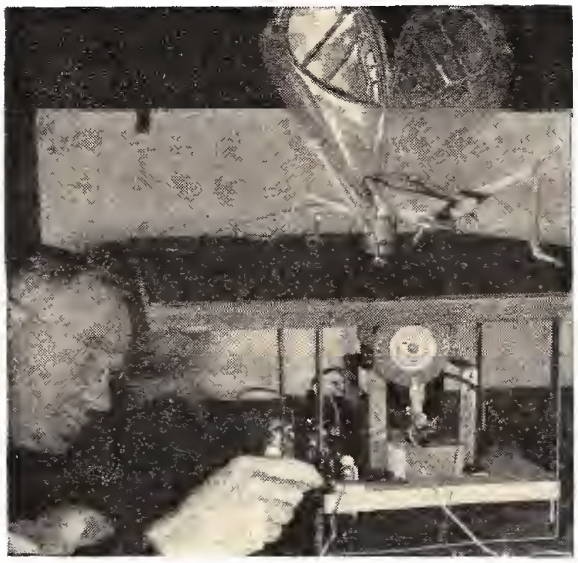

Natural history museums are gradually changing over many of their silent exhibits to talkies.

The rattle of a Red Diamond rattlesnake in the San Diego Museum of Natural History sends cold shivers down the backs of susceptible visitors who operate a prominently displayed switch. The clapper of a door-bell inserted in the tail shakes it and produces a realistic rattle.

A large scale cricket in the same museum emits its familiar chirping sound as its wing edges rub together, just as in nature. The sound in this case, however, is produced by spacing electrical contacts on a wheel that revolves in synchronization with the wing movement, causing a buzzer on a special sounding board to operate.

U. S. Manufacturers desire men to learn Electric Arc Welding and get practical experience under actual production conditions in the laboratories of the School of Engineering. Moderate training Fee. Accepted applicants will be fully trained until ready to pass rigid test and assisted in securing employment.

AIRCRAFT WELDING "We want more planes!" That's the demand on every side. No wonder there is a shortage of aircraft welders. Other industries need welders, too. There's almost no limit to what Milwaukee School of Engineering trained welders can do. They get good pay because they know the "how and why" of Welding, Metallurgy, Drawing, Blueprint Reading, Set-up Work and Fabrication—and they enable manufacturers to cut production costs. Remember—industries need practical trained Aircraft Welders, Arc Welding Operators, Technicians and Welding Engineers, and Air Conditioning and Refrigeration Technicians. Don't be satisfied to struggle along on ordinary, hit-or-miss jobs with poor pay—when in a short time you can become a trained specialist. Send coupon today—classes begin within a month.

MILWAUKEE
SCHOOL of ENGINEERING
Institute of Electrotechnics

MI-240 North Broadway and E. State, Milwaukee, Wis.

Without obligation send Free Booklet "The Dawn of a Gigantic Industry and its Outstanding Opportunity." Also tell me How to Become an

Arc Welding Operator (3 mo.)_ Air Conditioning & Refrig. Tech. (4 mo.)_
Air Craft Welder (6 wks.)___ Radio Serviceman (6 mo.)_____
Welding Technician (5 mo.)_ Commercial Electrical Engineer (1 yr.)_
Welding Engineer (1 yr.)___ Commercial Radio Engineer (1 yr.)__
Electrical Engineer Student Loan Plan_____
B. S. Degree (4 yrs.) ____ Earn Part Expense Plan_____

Name_____ Address_____

City & State_____ Age_____ MI-240

WANTED MORE TRAINED PILOTS and MECHANICS for BIG PAY JOBS IN AVIATION

Aviation is calling on this GOVERNMENT APPROVED SCHOOL for more Lincoln Trained Men! 128 Lincoln Graduates recently placed in good-pay positions. Opportunities for many more with Airlines, Factories, Airports.

BE A SKILLED, DEPENDABLE PILOT—Learn here to fly fast modern airplanes. Learn night, blind, beam, cross-country flying. Government Approved Training every step of the way prepares you for Government Rating as Private or Commercial Pilot.

Be An AIRPLANE MECHANIC or AIRPLANE BUILDER, AERONAUTICAL ENGINEER or AIRCRAFT SHEET-METAL MAN—Learn Airplane drafting, design and construction. Get real experience overhauling, repairing, rebuilding Airplanes and Engines. We teach you.

START TRAINING AT LINCOLN NOW while opportunities are at their best. We assist Graduates in locating positions. Now offering part-time employment for board and room while in training. **MAIL COUPON TODAY for complete information.**

LINCOLN AIRPLANE & FLYING SCHOOL
522 Aircraft Bldg., Lincoln, Nebraska

I'd like to prepare myself for a position in Aviation. Please rush complete information about Lincoln Training.

NAME_____AGE_____

ADDRESS_____

CITY_____STATE_____

ELECTRICAL BOOKS shipped FREE

10 BIG BOOKS

COMPLETE ELECTRICITY
INCLUDING RADIO AND TELEVISION

Here's great news for anybody interested in Electricity. BRAND NEW 17th. edition of Applied Electricity brought right down to date with NEW Electrical subjects fully covered. 10 big Volumes and all shipped **FREE** for examination.

For Beginners and Experts

Over 3000 pages—hundreds of illustrations—the most complete work of its kind we have ever published. Dynamos, motors, power stations, radios, television, everything electrical explained so anyone can understand it.

BIG FIELD! Big Demand! Big Pay!

Men who understand electricity are urgently needed right now in thousands of industries. Autos, airplanes, machine shops—practically every industry depends on electricity and men who know this subject make big money. Pleasant, fascinating work, easy to learn and do; learn quickly with these books. Send coupon for a set for **FREE** examination and see for yourself.

SEND NOW — A year's consulting membership in the American Technical Society now given to all buyers of this famous Cyclopedia of Electricity.

AMERICAN TECHNICAL SOCIETY
Dept. E-2320, Orexel at 58th St. Chicago

American Technical Society, Dept. E-2320, Drexel at 58th St., Chicago
Send for 10 days' free use, BRAND NEW 10 volume set of Applied Electricity. Because I send NOW you agree to send me a certificate of membership in the American Technical Society entitling me to full consulting privileges for one year. I will pay the few cents delivery charges on the books. If I wish I may return them in 10 days and owe you nothing, but if I keep them, I will send $2.00 after 10 days, then $3.00 a month until the total price of only $29.80 is paid.

NAME _____

ADDRESS _____

CITY _____ STATE _____

Please attach letter stating age, occupation and name and address of employer and give at least one business man as reference.

NEW STREAMLINE BENJAMIN AIR RIFLES

WITH LEVER HAND PUMP

BENJAMIN

.22

.177

BB

HARD ACCURATE SHOOTING WITH CHAMBERED AIR
You can use new models BENJAMIN AIR RIFLE WITH LEVER HAND PUMP anywhere, for practice firing or just plinking around the house or camping, fishing, hunting, etc., at lowest cost. Shooting force is adjustable depending on AIR PRESSURE—amazing maximum power and accuracy—will penetrate to 1". Hair trigger firing without lunge or recoil. Single Shot BB $7.50. Repeater BB $8.00. Rifled Cal. 22 or 177 Single Shot $8.50. Ask your dealer all about them or write for complete specifications—targets and blueprints FREE if requested. We also make a complete line of BENJAMIN AIR PISTOLS for target and small game. WRITE TODAY.
BENJAMIN AIR RIFLE CO., 629 MARION ST., ST. LOUIS, MO., U.S.A.

PHOTO-ENGRAVING

TASOPE' SINCE 1931

Cash in on pictures! Learn quickly at home or in our residence school. Make halftones, line cuts for the trade. Qualify for interesting, good pay jobs. We show you how and supply complete low-cost engraving plant. Small investment. Easy terms. Particulars free!

THE AURORA SCHOOL OF PHOTO-ENGRAVING
Dept. 615 Tasope' Bldg. Aurora, Mo.

REAL JOBS OPEN

FOR TRAINED AUTO MECHANICS
Learn QUICK!
8 WEEKS REAL SHOP TRAINING

AUTO, DIESEL and **AVIATION** Mechanics, welding, body & fender taught with real tools, on real equipment, in 2 biggest, best schools of their kind in the world. Step into Big Pay—$35-$60 a week. Sensational new low tuition rate for limited time! **FREE BOOK!** Send for Big, Free Opportunity book and new low rate—write nearest school **TODAY!**

McSWEENY SCHOOLS, Dept. F-8, Detroit, Mich. Kansas City, Mo.

MONEY for MEN ALL DATA FREE

THE PLASTEX Industry needs manufacturers on small scale and for big production of Lamp and Clock Stands, Art Goods and Novelties in Plastex and Marble Imitation. Experience unnecessary. ½c material makes regular 10c store sellers. Rubber molds furnished for speed production. Small investment brings big returns. BIG CHAIN STORE Orders now being placed. Ambitious men have chance for real prosperity. Our free booklet will interest and benefit you.

PLASTEX INDUSTRIES
Dept. 3, 1085 Washington Ave., New York, N. Y.

Government Jobs

Positions Clerk Carriers, Rural Carriers, Railway Postal Clerks, Postmasters, File Clerks, and many others. Splendid salaries, easy work, vacation with pay. Common school education sufficient. Examinations often. Established 1896. Send for our Civil Service Catalog No. 9.
Columbian Correspondence College, Washington, D. C.

HOW TO PLAY THE HAWAIIAN WAY

HAWAIIAN GUITAR—Learn to play this EASY, SHORT CUT WAY, right in your own home. No tedious practicing. No special talent necessary. Have Fun. Be popular. Surprise your friends. Get "on the air". Make money teaching others. Hundreds of our students now successful in orchestras, teaching, radio. You can do the same.

FREE ILLUSTRATED BOOKLET
"How to play the Hawaiian way" tells all about this quick, fascinating method. Write today.
OAHU SCHOOL OF MUSIC
2126 Payne Ave. Cleveland, Ohio

FORGE AHEAD

with the Thinking Alphabet "exactly how" short cut for training mind and personality. Helps gain Originality . . . Self Discovery . . . Personal Power . . . Achievement.
Free Booklet
THINKING ALPHABET INSTITUTE
99-H Fern St., Philadelphia

Learn TAXIDERMY

From a Museum Staff Taxidermist. Complete Course of Five Books—
BIRDS, ANIMALS, GAME-HEADS, FISH. TANNING
Send for FREE Sample of Lesson
Chicago School of Taxidermy
P.O. Box 343 Dept. B2 Chicago, Ill.

Learn Public Speaking

At home—in spare time. Many overcome "stage-fright," gain self-confidence, and increase their earning power, through ability to sway others by effective speech. Write for free booklet, *How to Work Wonders With Words* and requirements.
NORTH AMERICAN INSTITUTE, Dept. 2052, 3601 Michigan Avenue Chicago, Illinois

Rheumatism

Relieve Pain in Few Minutes *or Money Back*

To relieve the torturing pain of Neuritis, Rheumatism, Neuralgia or Lumbago in a few minutes, get NURITO, the fine formula, used by thousands. No opiates. Does the work quickly—must relieve cruel pain to your satisfaction in a few minutes—or your money back. Don't suffer. Clip this ad now as a reminder to ask your druggist for NURITO today.

Puppets May Now Smoke

The high spot of a marionette show now touring the country is when one of the tiny puppets lights up a cigarette, inhales the smoke, and blows it out. The picture above shows the puppet under the guidance of invisible strings, and below, how the smoking stunt is accomplished.

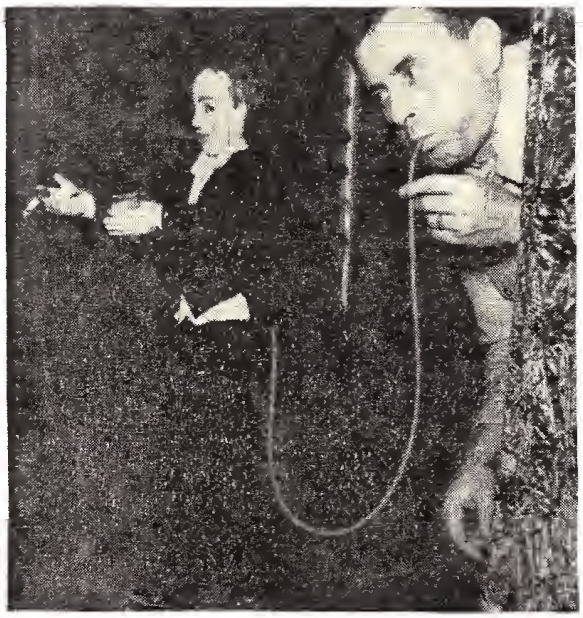

GOOD NEWS FOR THOUSANDS WHO ARE SKINNY

SAYS MANY ARE SKINNY BECAUSE THEY NEED VITAMIN B AND IRON. SUPPLIED IN IRONIZED YEAST

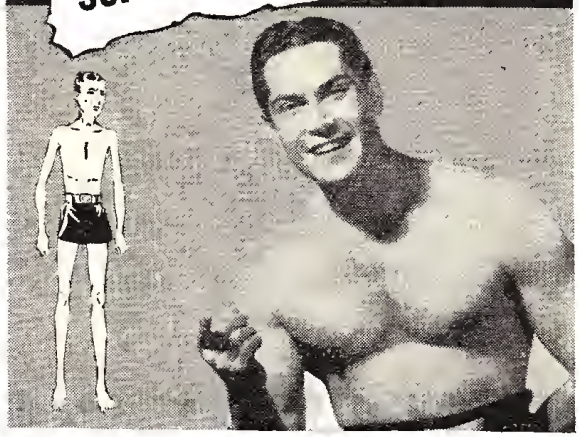

Posed by professional models

Read how thousands of thin, nervous, tired people have gained 10 to 25 pounds, new strength—quick!

SCIENTISTS have discovered that thousands of men and women are thin and rundown—often tired and nervous—sometimes just picking at their meals and sleeping poorly at night—simply because they do not get sufficient Vitamin B and iron from their daily food. It has been found that without enough of these two vital substances you may lack appetite and not get the most body-building good out of what you eat.

Now you can get these exact missing substances in these scientifically prepared, easy-to-take little Ironized Yeast tablets. And if you need these substances, the improvement that comes in a short time is often astonishing. Thousands report gains of 10 to 25 naturally attractive pounds in just a few weeks! Their tired feeling and jitteryness seem to have just flown away. They enjoy their food, sleep fine and get up in the morning full of pep. They're entirely different, much more attractive persons, easily winning many new friends and enjoying life as never before.

Make this money-back test

Get a package of Ironized Yeast tablets from your druggist today. If with the first package you don't eat better and FEEL better, with much more strength and pep—if you're not convinced that Ironized Yeast will give you the new normally attractive pounds, new energy and life you've so long wished for, the price of this first package promptly refunded by the Ironized Yeast Co., Atlanta, Ga.

But just one warning! Many cheap, inferior substitutes for Ironized Yeast have sprung up. Don't take inferior substitutes. Insist on the genuine Ironized Yeast. Look for IY stamped on each tablet.

Special offer!

To start thousands building up their health right away, we make this special offer. Purchase a package of Ironized Yeast tablets at once, cut out the seal on the box and mail it to us with a clipping of this paragraph. We will send you a fascinating book on health, "Facts About Your Body." Remember, results with the first package —or money refunded. At all druggists. Ironized Yeast Co., Inc., Dept. 562, Atlanta, Ga.

TUNE IN ON JOHN J. ANTHONY'S GOOD WILL HOUR.
See your local newspaper for exact time and station.

AUTO BOOKS SENT FREE



CAN YOU FIX IT?

These wonder books tell step by step HOW to take out "play" in differential—to kill the shimmy in steering—to set TIMING—how to put your finger on engine trouble and the expert way to FIX it. Newest improvements, fully covered.

6 BIG VOLUMES
Brand New Edition

2,500 pages, 2,000 illustrations, wiring diagrams, etc., including Marine Engines, Aviation Motors, Diesel Engines, etc. De Luxe edition, gold-stamped flexible binding.

on approval. Just mail the coupon and we'll send you a set of these remarkable auto books, just off the press. Whether you are a mechanic or helper, expert or apprentice, auto owner or driver, if you're interested in knowing all about automobile mechanics, take advantage of this FREE EXAMINATION OFFER.

GET A BETTER JOB

A better job—in the gigantic auto industry. BIGGER PAY—a chance to go into business for yourself and get a share of the huge profits, are waiting for any man who even half tries to improve himself. Learn auto engineering with these wonder books a new way—a quick reference method. Simply use the JIFFY INDEX to look up the answer to any auto problem. Built by eleven of America's great automobile engineers, and written in simple language so you can understand it. Very newest cars, all covered.

Privilege of consulting Automobile Engineers of American Technical Society for one year without cost if you mail coupon immediately.

Send promptly and we will include a Brand New EXTRA volume with over 300 pages including ALL latest cars with wiring diagrams and data sheets on each.

AMERICAN TECHNICAL SOCIETY
Drexel Ave. & 58th St., Dept. A2320, Chicago, Illinois

I would like to see the new 6-volume edition of your AUTO BOOKS. I will pay the few cents delivery charges only, but if I choose to, I may return them express collect. If after 10 days use I prefer to keep them, I will send you $2 and pay the balance at the rate of only $3 a month, until $24.80 is paid. Please include consulting membership and extra Volume No. 7, as per your offer above.

Name _____
Address _____
City _____ State _____
Please attach letter stating age, occupation and name and address of employer and that of at least one business man as reference.

LAW STUDY AT HOME

Legally trained men win higher positions and bigger success in business and public life. Greater opportunities now than ever before. Big corporations are headed by men with legal training.

More Ability: More Prestige: More Money

We guide you step by step. You can train at home during spare time. Degree of LL. B. Successful graduates in every section of the U. S. We furnish all text material, including 14-volume Law Library. Low cost, easy terms. Get our valuable 48-page "Law Training for Leadership" and "Evidence" books FREE. Send for them NOW.

LaSalle Extension University, Dept. 2493-L, Chicago
A Correspondence Institution

Learn MECHANICAL DENTISTRY

A profession offering unlimited opportunities. Most modern and complete course embracing every branch from Plate to Porcelain Work, which prepares you to work for Dentists or start your own business. Individual instruction—practical training in day or night school. No books—no classes. Catalog upon request.

McCARRIE SCHOOL OF MECHANICAL DENTISTRY
207 N. Broad St. Dept.907 Philadelphia, Pa.

GET INTO THE BAKING BUSINESS!

National Baking Institute announces a new home study course in commercial baking. Baking now America's fifth industry in wages. Nearly a depression-proof business. Good field for ambitious men. Common school education sufficient. **Send for free booklet** "Opportunities in Commercial Baking" and requirements.

National Baking Institute
3601 Michigan Ave. Dept. 2052, Chicago, U. S. A.

AVIATION APPRENTICES

AIRMINDED YOUNG MEN INTERESTED IN TRAINING FOR ENTERING THE WELL PAID FIELD OF AVIATION AS APPRENTICES—Write immediately, enclosing stamp.

MECHANIX UNIVERSAL AVIATION SERVICE COMPANY
WAYNE COUNTY AIRPORT Box 857 Dept. A Detroit, Mich.

MAKE MONEY

***WITH* NASH CUSTOM TAILORED CLOTHES**

Be your own Sales Manager, take orders; earn money with this famous make of clothes. High quality men's tailoring at popular prices.

WRITE! Write in today. Territories open.

THE A. NASH COMPANY
1905 ELM STREET • CINCINNATI, OHIO

Home Study

EARN A DEGREE AT HOME

From A Chartered Institution of Higher Learning
Employers Now Demand College Graduates With Degrees

88 Degree Courses in Art; Sciences; Philosophy; Education; Psychology; Public Health; Sociology; Physics; Chemistry; Pol. Science; Theology; Law; Business Training; Accounting; Statistics; Adv.; Sales; Agriculture, Electrical, Mechanical, Civil, Structural, Diesel, Architectural, Mining, Drafting, Automotive, Aeronautical, Radio, Refrigeration, Highway, Marine, Air Conditioning, Geology, Petroleum, Industrial, Chemical Engineering. Founded 1908. 170 p. Catalog Free.
McKinley-Roosevelt Graduate College, 4750-C Sheridan Road, Chicago

NOW.. a DYNAMIC HEAVY DUTY INDUSTRIAL WELDER

Works off 110 volt electric light circuit. For this unheard of price you can get the marvelous Dynamic Super-Charged Welder complete—all ready to plug into your light socket. The Dynamic does both metallic arc and carbon arc welding.

for Only $19.75 RETAIL

Works On Iron, Steel, Tin, Brass, Copper And All Other Metals

You can also solder and braze on the lightest material. With our free instructions you can tackle anything and in no time at all you will be able to do finished repair jobs. Once you have the Dynamic outfit, you are all set in a profitable welding business of your own. Write for FREE particulars TODAY.

DYNAMIC WELDER CO., 2226-KU Silverton Road, CHICAGO, ILLINOIS

WELDS BUMPERS, FENDERS, CYLINDER BLOCKS, BODIES, FRAMES, ETC. Does Farm, Factory and Home Repairs

Without previous welding experience you can make for yourself as much as $5.00 on a repair job that can be done in less than one hour. Many welders make as much as $15.00 to $20.00 a day. The Dynamic Welder is light and easily portable.

Agents Wanted!
Get our big profit plan and 10-day trial offer. Send for it TODAY.

Evaluator Tests Lighting

An ingenious instrument which, for the first time, enables safety authorities to evaluate quickly, conveniently, and accurately the effectiveness of street lighting systems has just been developed.

It "sees" and promptly records the true brightness of pavement, brightness of objects on and near the roadway, and the interference with seeing caused by the glare from the lighting system. These are the three factors that determine how quickly and clearly and certainly a driver can see.

One of the Evaluator's several parts, mounted on the hood of an automobile and extending beyond the radiator, resembles a stubby spring-board. A second part, above the windshield, looks like the loud speaker of a public address system. A third element, on the driver's seat, resembles a portable radio.

What appears to be a spring-board actually is a miniature strip of street. The pavement is similar in tone and texture to the surface of the roadway in question. On it are typical obstacles. Its position above the headlamps of approaching cars makes it possible for the investigator to proceed with an appraisal at any time without waiting until traffic has disappeared.

What first might be taken to be a loud speaker above the windshield is really a glare collector which measures the total glare from all street lamps, within the driver's field of view, and the loss of vision resulting therefrom.

What looks like a portable radio on the driver's seat is an "operator's control box" provided with dials and selector switches. It automatically records on a card the measurements of the three factors (brightness of pavement, objects, and interference with seeing caused by glare from the system).

Learn by
PRE-TESTED TRAINING
RADIO
TELEVISION

A flexible training plan to fit your immediate needs

National Schools offer optional training planned to fit your present circumstances. You can master Radio, Television, Sound and allied trades by National's exclusive plan. Actual shop and studio training; also complete training if you cannot give up your present employment and income. A definite plan to fit your needs. You can qualify for good pay positions in this ever-advancing and always-interesting field. Hundreds of young men with little previous preparation have already done it with the thorough up-to-date training given exclusively by National Schools—located right at the heart of one of the most active centers of Radio in the world.

National's million dollar school offers complete training

Think of the advantages of a million-dollar school. You can learn everything about Radio, from building and repairing receivers and transmitters to every phase of operation. Such training fits you for choice Radio positions—on land, water or in the air. A chance for adventure and good pay. National Schools offer you a fully illustrated literature about the opportunities for fascinating and highly paid employment in Radio, Television, Sound Recording and related activities. Send for free literature today—right now. No obligation. Postpaid.

Established 1905

FREE LITERATURE gives full details

NATIONAL SCHOOLS
Los Angeles

NATIONAL SCHOOLS
Dept. MMR-2, 4000 S. Figueroa St., Los Angeles
Request for Free Literature on Radio and Television

NAME..... AGE.....

ADDRESS .....

CITY..... STATE.....

Two Giant Industries NEED MEN NOW!

AIR CONDITIONING ELECTRIC REFRIGERATION

We supply trained men for two of America's fastest growing industries. If you can meet our requirements, we will train you in spare time at home for a good pay position as an Installation and Service Expert in the Electric Refrigeration and Air Conditioning fields. In addition we will give you **ACTUAL Shop Practice** when you graduate, and help you to qualify for profitable employment with an exceptionally bright future.

Can You Qualify?

To be acceptable for enrollment you should be mechanically inclined, between ages of 19 and 45, have fair education and be able to furnish character references.

GET FREE FACTS

Get amazing facts about actual opportunities for ambitious men in Air Conditioning and Refrigeration. Learn all about these money-making opportunities and about our low-cost, easy-pay plan of training. Send coupon below, or write today, stating age and which industry interests you most. No obligation.

UTILITIES ENGINEERING INSTITUTE Established 1927

400-410 N. Wells St. Dept. 202 Chicago, Ill.

SEND THIS COUPON FOR FREE FACTS

Utilities Engineering Institute, Dept. 202
400-410 N. Wells St., Chicago, Ill.

I would like to receive the Free Facts telling how I can qualify for the big opportunities offered in Air Conditioning and Electric Refrigeration. I have marked which interests me most.

☐ AIR CONDITIONING ☐ REFRIGERATION ☐ BOTH

Name_____ Age_____

Address _____

City_____ State_____

Gets $267.00 from HER CELLAR

Mrs. M. M. of Dallas, Texas, needing extra money earned $267 within three weeks raising giant mushrooms and selling her crop to the United Mushroom Company, 3848 Lincoln Avenue, Dept. 481, Chicago, Ill. Exceptional, but this concern (Estab. 1908) shows people a reliable method of raising giant mushrooms in suitable cellars, sheds, barns, etc. It supplies everything necessary for you to start in this business and buys your crops. If you need extra money write them today for free particulars.

8-TUBE, 2-BAND SUPER AC-DC



each in lots of six or $12.48 when purchased singly. Regular $24.95 list model 3T3 GOLDENTONE. Check these 1940 features: Dynamic speaker. Walnut cabinet. Illuminated vernier aeroplane dial. "Goldenscope"—no aerial or ground required. Receives Coast to Coast on Broadcast and Police, Amateur, Aeroplane, etc., on Short Waves. One year guarantee. Send $1.00 deposit, balance C.O.D. Money back if not satisfied.

$11.23

GOLDENTONE RADIO CO., Dept. MI, Dearborn, Mich.

HAVE YOU SOME SPARE ROOM

a basement or garage where you can do light work? We can offer you a profitable proposition, casting 5 and 10c Novelties, Ashtrays, Toy Autos, etc., as manufacturer for firm of many years standing. No experience necessary as we furnish full instructions with moulds. If interested in devoting spare or full time to profitable work write AT ONCE stating age and space available as we are now closing arrangements for 1940 supply of our goods.

METAL CAST PRODUCTS CO. Dept. 2
1696 Boston Road New York, N. Y.

SECRET SERVICE BOOK FREE

Sent For 30 Days Reading

No Money Down—Actual Crime Cases—
If You Act Quick! We will send you this stirring book on Crime Detection, Secret Service and Identification Work for 30 days free reading. Send no money. If you decide to keep it, then send me only $1.00. If not, return it. WRITE TODAY. Literature will be sent only to persons stating their age.

T. G. Cooke, Dept. 2352, 1920 Sunnyside Ave., Chicago, Ill.

Big Money for Workers In Home or Shop

MAKE color-glazed concrete products, gravestones, tiles, walls, floors. Lawn, cemetery pottery. Basement waterproofing. New, patent method. Use only sand, cement, cheap materials. No skill required. Operators wanted everywhere. Full or part time. Big earnings. Send 10c TODAY for booklet, cost data, details. No obligation.

NATIONAL POTTERIES COMPANY
Dept. 8, 13 W. 26th St. Minneapolis, Minn.

CARTOON YOUR WAY TO SUCCESS!

DON'T COPY - LEARN TO ORIGINATE!

RAYE BURNS will teach you HOW to CREATE ORIGINAL CARTOONS at home that you can SELL! Course has 26 lessons and 600 illustrations. *Send name and address for free details.* Only.... **$2.85**

RAYE BURNS SCHOOL, Dept. F-3, Box 2194, Cleveland, Ohio

AN AVIATION CAREER OFFERS YOU GREAT FUTURE!

Demand for trained aircraftsmen is increasing and already exceeds supply. Curtiss-Wright Tech, Aviation's foremost and oldest school, is located on Grand Central Air Terminal in heart of the aircraft industry and specializes in training MASTER MECHANICS and AERONAUTICAL ENGINEERS. (No flying involved.) Graduates are obtaining immediate employment. Write for details NOW Dept. MI-2.

Curtiss-Wright Technical Institute, Glendale (Los Angeles) California

RADIOS..SAVE UP TO 50%

DEAL DIRECT . . . FACTORY PRICES! Many models to choose from at wholesale prices. AC-DC midget $4.98. Portable and battery sets $8.98 up. Car sets $11.75 up. Also consoles, all-wave, etc. Samples at 50% off. Send for FREE 1940 bargain catalog giving details of 10 day FREE trial and agent's proposition and discounts. No obligation, write today. **GOLDENTONE RADIO CO. DEPT. MI, DEARBORN, MICH.**

Free Catalog

Get Big WELDING PROFITS! with New A.C. Arc Welding

ONLY $12.50 MONTHLY It's easy to establish your own arc welding business! With this complete, new, speedy Hobart A.C. Arc Welder you can handle hundreds of profitable repair and construction jobs. Simple to operate, easy to get high quality welds. Very low operating cost.

For as little as $12.50 monthly you get everything you need to start producing the big profit welding jobs. To prove how profitable it is we give you 10 days trial on your own work, at our risk. Write for your free booklet and complete details.

HOBART BROS. COMPANY, Box SM-2401, TROY, OHIO

Earn $150 to $300 EXTRA PROFIT MONTHLY

Profit from one job alone pays the small monthly payment!

FREE! "NEW PROFITS IN ARC WELDING"... ASK FOR IT.

Check this ad and MAIL TODAY FOR COMPLETE INFORMATION

Over 700,000 People

have studied music this easy way

Now You Can Learn to Play Your Favorite Instrument Without a Teacher

Easy as A-B-C

MOST of these 700,000 students didn't know one note from another—yet in an amazingly short time they learned to play their favorite instrument. Best of all they found learning music *amazingly easy*. No drudgery—no expensive teachers. This simplified method, perfected by the U. S. School of Music, made learning music as easy as A-B-C.

From the start you are learning *real* tunes by *note*.

Every step, from beginning to end, is right before your eyes in print and picture. First you are *told* how to do a thing, then a picture *shows* you how, then you do it yourself and *hear* it. And almost before you know it, you are playing many of your favorite pieces—Jazz, ballads, classics. No private teacher could make it clearer. The cost is surprisingly low—averaging only a few cents a day—and the price is the same for whatever instrument you choose.

LEARN TO PLAY BY NOTE

Piano Guitar
Violin Saxophone
Organ Mandolin
Tenor Banjo
Hawaiian Guitar
Piano Accordion
Or Any Other Instrument

Learn now to play your favorite instrument and surprise all your friends. Change from a wallflower to the center of attraction. Musicians are invited everywhere. Enjoy the popularity you have been missing. Start now!

SEND FOR PRINT AND PICTURE SAMPLE

If you really *do* want to play your favorite instrument, fill out and mail the coupon asking for our Print and Picture Sample. These explain our newly perfected method fully and show you how easily and quickly you can learn to play at little expense. Instruments supplied when needed, cash or credit. U. S. School of Music, 2622 Brunswick Bldg., New York City.

U. S. School of Music,
2622 Brunswick Bldg., New York City

I am interested in music study, particularly in the instrument indicated below. Please send me your free illustrated booklet, "How to Learn Music at Home", and the free Print & Picture Sample.

Name .....

Address .....

Instrument..... Have you Instr?.....

How To Build It

Beginners as well as expert workmen will find this handsome, 144-page book packed with easy, convenient plans for a multitude of workshop projects. HOW TO BUILD IT offers complete, detailed specifications for home construction of toys, midget auto racers, model planes, boats and locomotives, playground equipment, etc.

This is the handiest, most satisfactory and least expensive volume of its kind ever offered to the home workshop fan. HOW TO BUILD IT costs only 50 cents, postpaid. Send stamps, money order or check to:

FAWCETT PUBLICATIONS, Inc.
GREENWICH, CONNECTICUT



NEW BRUSH PLATING OUTFIT *For* AUTO PARTS

Connects to a battery with no tanks necessary. Plates on iron, steel, brass, copper, etc. Almost as simple as painting. Hundreds of car owners waiting for this low-cost plating. Improves appearance and value of the car. Your opportunity to make good income plating auto parts, bathroom fixtures, reflectors, mirrors, etc.

FREE PROOF

Write quick—big season here. Get FREE PROOF and particulars that put you in a paying business of your own.

GUNMETAL COMPANY
AVENUE P, DECATUR, ILL.

U. S. GOVERNMENT JOBS

Railway Postal Clerks

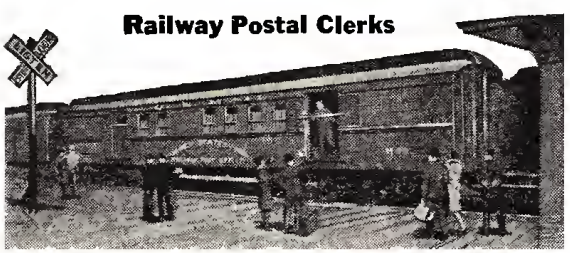

Many Other Government Jobs
Mail Carriers—Clerks—File Clerks—
Post Office Clerks—Stenographers, Etc.

START

$1260 to $2100 Year

Mail Coupon Before You Lose It

FRANKLIN INSTITUTE, Dept. W262,
Rochester, N. Y.

Sirs: Rush to me without charge—copy of 32-page book, "How to Get U. S. Government Jobs," with list of positions and full particulars telling how to qualify for them.

Name .....

Address .....

MADE $217 in 10 DAYS WASHING WALLS

● Newly invented machine washes walls 6 times faster and better than by hand.

Charles Steele made $217.00 the first 10 days. We want more men like him to go into business for themselves. Customers everywhere — homes, schools, offices, stores, churches, lodge halls, hotels all have walls that need washing. You don't rent a store or office; you operate this business from your home. On a job paying you $10 your cost is 20c. Write for complete facts on new Von Schrader Wall Detergerwhich washes paint perfectly and postpones repainting many years.

Howard James writes: "I landed a $40.00 job the first day."

J. A. Crosby says: "I have several jobs to start on Monday, thanks to your help."

Cliff Brown writes: "I got a contract in a public school which will more than pay for my machine in the next few days."

Easy Payments

It takes only a few dollars to get started in this new money-making profession. No experience necessary. The total price is so small and the payments so easy that anyone with ambition should get started NOW.

SEND FOR FREE INFORMATION

VON SCHRADER MANUFACTURING CO.

762 Pl. RACINE, WISCONSIN

STUDY **ENGINEERING** AT HOME

EARN A **DEGREE** AT HOME

From A Chartered Institution Of Higher Learning

Employers Demand Degree Men For Key Positions

88 Degree Courses In Electrical, Civil, Mechanical, Drafting, Architectural, Automotive, Steam, Diesel, Aeronautical, Radio, Structural, Mining, Industrial, Highway, Petroleum, Marine, Refrigeration, Air Conditioning, Chemical Engineering; Arts; Sciences; Philosophy; Education; Public Health; Psychology; Sociology; Physics; Chemistry; Geology; Pol. Science; Theology, Law; Agriculture; Business Training; Accounting; Statistics; Adv.; Sales. Founded 1908.

McKinley-Roosevelt Graduate College, 4750-D Sheridan Road, Chicago

---



How to Win Fortune, Happiness by a Book

Money not essential to begin business or develop a winner. Too much money, unless earned by experience, usually means failure. Success develops itself. Marconi, Carnegie, automobile, telephone, telegraph, camera all started from **BOOKS.** Read **HOW.** Learn to get ahead in sure, inexpensive way. For free **HOW GUIDE,** write your name and address on postcard, mail today to

R. & R. Co., 602 H. St., Melrose, Massachusetts

Photography *for* PLEASURE or PROFIT

Prepare for profitable business or fascinating hobby, at home under guidance of qualified instructors. No previous experience necessary, common school education sufficient. Many earn while learning. Our practical studio methods also qualify for well-paying positions upon graduation. Send coupon below at once for free booklet "Opportunities in Modern Photography", particulars and requirements.

AMERICAN SCHOOL OF PHOTOGRAPHY
3601 Michigan Avenue Dept. 2052, Chicago, Illinois

Send booklet, "Opportunities in Modern Photography", full particulars and requirements.

Name ---------- *Age* ----------

Address ----------

City ---------- *State* ----------

Follow This Man!

Secret Service Operator No. 38 Is On The Job!

Follow him through all the excitement of his chase after the counterfeit gang. See how a crafty operator solves a murder with tell-tale finger prints! Thrills! Mystery!

FREE! **The Confidential Reports No. 38 Made to His Chief**

Earn a Regular Monthly Salary

Write for reports and free "Blue Book of Crime." Learn how YOU can become a Finger Print Expert, at home, in spare time, at small cost. Our graduates run 47% of all the Identification Bureaus in America! Send for list of over 600 bureaus employing our graduates. Write today! *Literature sent only to persons stating their age.*

INSTITUTE OF APPLIED SCIENCE
1920 Sunnyside Avenue Dept. 2352, Chicago, Ill.

MECHANICS-WELDERS - COLLISION MEN

Big pay jobs for trained men in Auto and Diesel Mechanics, Electric Arc and Acetylene Welding. Complete courses. Practical training. Short courses in body and fender bumping, spray painting, metal finishing. Fine equipment. Special low rates. Pay-after-graduation plan. Write today.

MICHIGAN TRADE SCHOOL
3763 Woodward Ave., Detroit, Mich.

Write for FREE FOLDER

---

604 Page CATALOG, 7000 NOVELTIES

Rush 3¢ for mammoth catalog of unusual novelties, 604 pages, 4,000 illustrations, 7,000 novelties. Rotogravue section, 6-color cover. Radios, candid cameras, optical goods, novelty jewelry, unusual books and seeds, airplane and hobby kits, live animals, rifles and guns, fireworks, make-up supplies, joke goods, magic, outdoor and sport items, labor-saving devices, musical instruments, puzzles, wigs, auto and bike accessories, live ants, watches, knives, rubber stamps, smoker's novelties, European novelties, articles from the Orient and Far East, occult and fortune telling articles, money making outfits, muscle developers, religious articles, symbol jewelry, archery, fencing, stamps for collectors, projectors, and films, etc., etc. (DELUXE CLOTH-BOUND EDITION, 15¢).

JOHNSON SMITH & CO., Dept. 523-A, DETROIT, MICH.

Learn Advertising at Home

Make money in advertising. Prepare quickly during spare time. Also earn while you learn. No experience necessary. New, easy method. Nothing else like it. Send at once for free booklet—"Win Success in Advertising," and requirements. No obligation.

Page-Davis School of Advertising
3601 Michigan Avenue, Dept. 2052, Chicago, Illinois, U. S. A.

BUILD ARC WELDER FROM OLD GENERATOR

We Show You How For Light or Heavy Work

Produces 75-200 amperes. Takes no previous experience or hard work to make one of these welders. Complete **PLANS** and valuable catalog 35c. Over 900 Electrical Supply Bargains. Send 35c today.



LEJAY MFG. 1314 LEJAY BLDG. MINNEAPOLIS, MINN.

LEARN WATCH REPAIRING

AT HOME You can learn by our modern and original system of instruction every part of the **Watch Repairing Trade** at home. You can earn money while learning and prepare yourself for a well paying position or start in business after completing our course of instruction. Good watch repairers are in demand and generally earn very good salaries. For particulars apply to the

WISCONSIN SCHOOL OF WATCH REPAIRING
524 E. Mason St., Dept. C, Milwaukee, Wis.

A New Twist In Trees

Ten years ago, Edward C. Honel, of Tomah, Wisconsin, tied an inch and a half elm sapling into a knot to see what it would do. What it did may be seen in the picture below.

The two elms shown in the picture above were tied in knots two years ago, each requiring more than four hours of slow bending before they could be tied without injury to the trees.

"Every explosion of a mine, torpedo or depth-bomb, whether or not it sinks a ship, is capable of destroying enough herring or other fish to feed the inhabitants of a village for months," says Dr. Robert C. Murphy, president of the National Association of Audubon Societies.

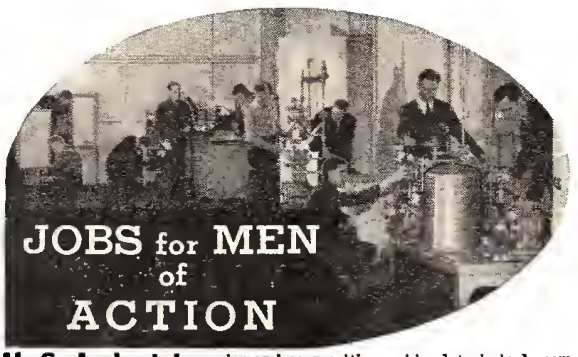

U. S. Industries demand men with combined technical, commercial and practical training.

Choose Your Own Place In AIR CONDITIONING
for Homes, or Commercial Installation and Service, Ventilating, Dairy Refrigeration, Transport Refrigeration, Sales, Research, or Executive Positions.

36 YEAR OLD ORGANIZATION Now receiving applications of men to prepare for good paying positions. No experience needed. We train you under actual working conditions. Every student given individual instruction in immense laboratories on **20th Century Air Conditioned Test Home.** Co-operative Part-time work Plan. Earnest men of high character assisted to earn part expenses. Student loans. Moderate training fees. Few industrial Scholarships awarded to men of outstanding merit. Don't be content with ordinary work and low pay when in a short time you can become a thoroughly trained Specialist in Air Conditioning.

MILWAUKEE SCHOOL of ENGINEERING
Institute of Electrotechnics

GET YOUR FREE COPY OF NEW BOOK
"Step Up to Success"
Write to
O. Werwath, President
MILWAUKEE SCHOOL OF ENGINEERING
Dept. MI-240A
Broadway and East State
Milwaukee, Wis.

Without obligation send free booklet "Step Up to Success." Also tell me how I can become an Air Conditioning and Refrigeration Specialist in 4 mos.____Air Conditioning Engineer (1 yr.)____Send details of Student Loan ___ Industrial Scholarship ____ Earn Part Expense ____.
Name_____ Age_____
City_____State_____
If interested in other courses, check here: Air Craft Welding (6 wks.)____Electric Arc Welding Operator (3 mos.)____Welding Technician (5 mos.)____Welding Engineer (1 yr.)____Radio and Television Serviceman (6 mos.)____Commercial Radio Engineer (1 yr.)____Electrical Engineer (B. S. degree—4 yrs.)____.

DRAFTING

BOOKS SENT FREE!
ON APPROVAL
5 VOLUMES BRAND NEW EDITION

Only 15 minutes a day with these WONDER BOOKS can prepare you for a good drafting job in less than a year. Mechanical and architectural drafting from simple straight lines to important complex plans. A step at a time! Built especially for beginners, for men with only grammar schooling. Drafting room practice. PLUS ENGINEERING, made easy and clear. Includes complete information on blue print reading for building and machine trades.

For Beginners or Experts

Written so you can understand every word, by 22 well known engineers and architects. De Luxe flexible binding, nearly 2,000 pages, 1,546 blueprints, charts and diagrams; prepares you for a good drafting job in mechanical or architectural lines. Sent for 10 days' free use if you mail coupon immediately.

Big Field Big Demand Big Pay

Competent draftsmen are urgently needed right now in all building and manufacturing lines at $30.00 to $75.00 a week. That's just the beginning—FOR DRAFTSMEN HAVE GOOD CHANCES FOR ADVANCEMENT. Pleasant, fascinating work, easy to learn and do. Learn quickly with these books—send coupon for a set and see for yourself.

A year's consulting membership in the American Technical Society now given to all owners of this famous cyclopedia of drafting.

These Instruments Included

Complete set of high grade drawing instruments if you send for these drafting books NOW. These instruments are made of the finest of German silver, are absolutely accurate and are packed in velvet lined leatherette pocket case. Splendid value, but included with these books.

AMERICAN TECHNICAL SOCIETY
Dept. D2320, Drexel at 58th St., Chicago, Ill.

American Technical Society, Dept. D2320, Drexel at 58th St., Chicago
Send for 10 days' trial, new 5 volume set of drafting. I will pay the few cents delivery charges. If I wish, I may return books in 10 days and owe you nothing but if I decide to keep them, I will send $2.00 after 10 days, then only $3.00 a month until $24.80, the total price is paid. Send lastest edition and include drawing instruments and consulting Membership Certificate.

NAME _____

ADDRESS _____
Please attach letter stating age, occupation, employer's name and address and that of at least one business man as a reference.

New 1940 Catalog of SOUTH BEND LATHES

THIS new 48-page catalog describes the 1940 line of South Bend 9-inch Workshop Lathes. Twenty-three different models are listed at prices ranging from $115.00 up, complete with drive equipment.

Improved engineering features of the new 1940 model lathes include quick change gear equipment making all power feeds and threads instantly available at the touch of a lever and an automatic apron with friction clutch drive for power cross feeds and power longitudinal feeds.

Attachments, chucks and tools for production manufacturing, precision tool room work, general machine work and automotive service machine work are also listed in this catalog.

SOUTH BEND LATHE WORKS, 264 E. Madison St., South Bend, Ind., U.S.A.

6 SIZES OF SOUTH BEND LATHES

Manufactured in 9", 10", 11", 13", 14½" and 16" swing, in 3' to 12' bed lengths. Motor Drive or Countershaft Drive, Quick Change Gear or Standard Change Gear type.

WRITE FOR YOUR COPY TODAY

SOUTH BEND LATHE WORKS
264 E. Madison St., South Bend, Ind., U.S.A.
Please send me Free your New 1940 Catalog of South Bend Lathes.

Size of Lathe_____

Name_____

Address_____

City_____ State_____

A copy of this new 9-inch Workshop Lathe Catalog will be mailed on request. Use the Coupon or a post card. State size of lathe best suited to your work.

SOUTH BEND *Precision* LATHES

MECHANIX ILLUSTRATED

W. H. FAWCETT
Publisher

Vol. XXIII
No. 4

February
1940

With over twelve million men, women and children enjoying bowling, it ranks at the top among America's favorite indoor sports. In this article, Joe Falcaro, the world's greatest bowler, gives expert advice to both beginners and "old hands" on the best way to become a first class bowler.

HOW TO BOWL

by
Joe Falcaro

I HAVE, through personal instruction, made thousands of good bowlers from beginners. Too, I have made hundreds of excellent bowlers, men who average around 200, from good bowlers.

Any bowling secrets I have been able to reveal to these bowlers you will find on these pages. I urge that you read this article several times, slowly and carefully, so that no point is missed. Study it as you might study a lesson in school. Memorize it, if necessary, but be sure you understand and apply every point in practice.

This advice goes to those of you who may have been bowling for five or ten years, as well as the beginner. It is my observation that very often the bowler who has been at the game for some time, and may be a creditable performer in tournaments, is guilty of one or two primary faults, which, if corrected, would raise his bowling average 10 to even 25 pins a game.

What's most important? The answer: Proper equipment, if you really have ambi-

JOE FALCARO, UNDEFEATED MATCH GAME CHAMPION OF THE WORLD—HIS RECORD.

1. 49 perfect (300) games.
2. World's Exhibition Tour Record—227.3.
3. World's Match Game Record (30 games) 255.1.
4. World's Match Game Record (10 game) 268.2.
5. Longest Strike Run—33 consecutive strikes.
6. Twice Winner Dwyer's $1,000 Classic. 230 average each tournament.
7. Three-time winner Thum's Classic, 1932, 1933, 1934. 229 average for 310 games.
8. Undefeated in any home-and-home match for forty games or more.

Joe Falcaro has a standing challenge to bowl any man for $2,500, plus gate receipts, on a winner-take-all basis.

tions to be a class-A bowler. Bowling shoes are not expensive. Get a pair. They will last five years or more. Get a ball, too. With your own ball you will enjoy the game more and bowl better. A ball lasts a lifetime.

If you can't get bowling shoes be sure the shoes you bowl in have rubber heels and leather soles. Never bowl in rubber-soled shoes. The left foot must slide as you approach the foul line, on your final step, and a rubber sole will not permit this. Too, you must use your heel as a brake and the only kind that will so function are of rubber.

Whether you use a two-finger ball or three-finger ball is a decision you will have to make. You can bowl as well with either, and the three-finger ball is easier for most persons to hold. For those reasons I usually suggest a three-finger ball to a beginner, especially one whose finger grip is not strong enough to hold the two-finger ball without tiring.

Don't get the idea a three-finger ball is for sissies. If that grip feels more comfortable to you, use it.

Now for fitting the ball. The ball must be a perfect fit if you are going to score well, and consistently. The method for determining the proper fit is the same for both the three-finger and two-finger ball. The thumb is fitted first, and should be inserted as deep as possible into the largest hole in the ball. The fit around the thumb should be just loose enough for comfort, and tight enough to maintain friction when the thumb is bent at the joint and pulled out of the hole. If there is doubt in your

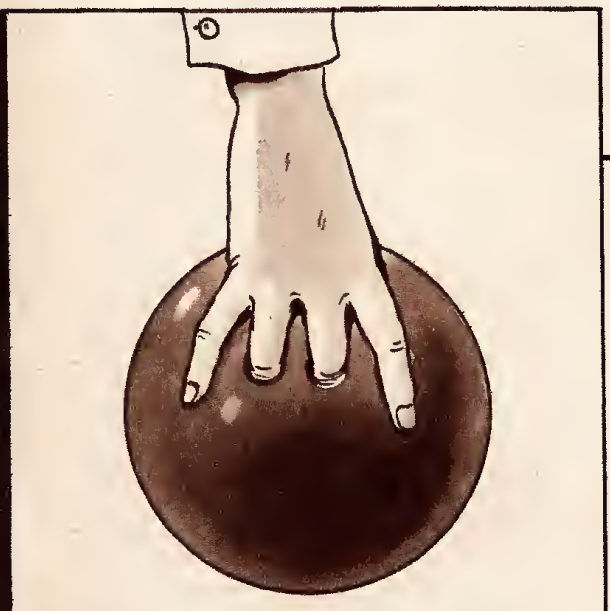

NATURAL THREE-FINGER HOLD

NATURAL TWO-FINGER HOLD

Your own preference determines whether you will use a two-finger or a three-finger ball. You can bowl as well with either, and a three finger ball is easier for most persons to hold. Proper fittings of the holes to the bowler's fingers is absolutely necessary if consistently good scoring is desired. A bad fit is one of the greatest causes of poor bowling.

mind, select a thumb-hole on the loose side.

The holes for the other fingers should fit with the same degree of looseness. Very important in fitting a ball is the span—the distance between the thumb-hole and the hole for the second finger. This distance should be such that the second finger can be inserted up to the second joint without stretching or cramping the hand. The sure way to measure this is to insert the thumb full length and let the entire length of the second finger rest on the ball, over the hole for which that finger is intended. If the second joint of that finger projects about ¼-inch past the inside edge of the finger hole, the ball is the right span for you. Use this same rule in fitting the third finger, if you use a three-finger ball.

A too-narrow span, or a too-wide span will make your bowling erratic, destroy your accuracy. It is wise when selecting a ball to get the advice of the bowling alley proprietor as to the proper fit.

Now that you have selected the proper ball, take care to spread your fingers not occupied in holding the ball, onto the ball's surface. Don't spread them so far they feel stiff and unnatural, but get space between them, so that each finger contributes to guiding the sphere.

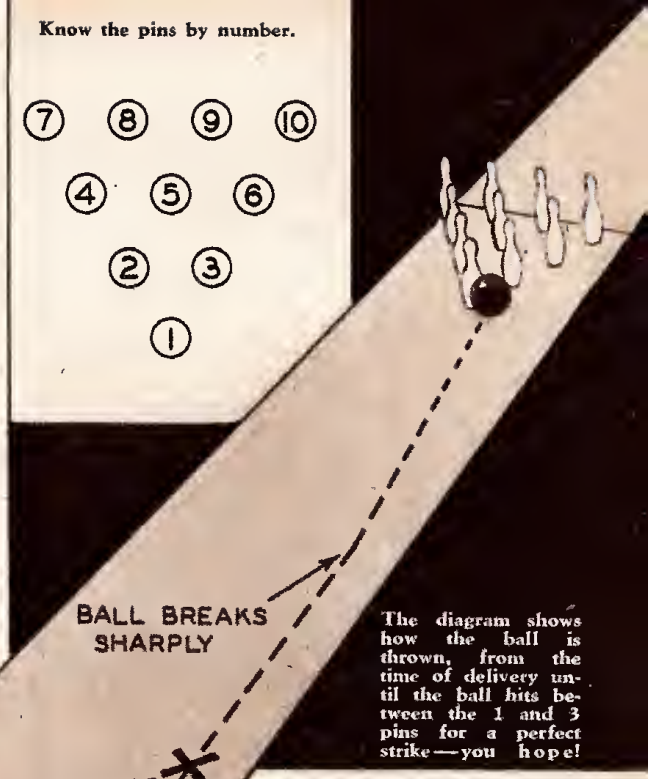

The diagram shows how the ball is thrown, from the time of delivery until the ball hits between the 1 and 3 pins for a perfect strike—you hope!

The next most important thing in learning to bowl well is poise. In the case of many persons who have been bowling for years without attaining consistently high scores, lack of poise is probably the most important single factor in their failure. By poise I mean physical relaxation or lack of muscular tenseness, and a frame of mind that permits complete concentration on the job at hand. So complete must be this concentration that you are not aware of spectators, what is being done on the alley next to you, what your score is, or anything except proper delivery of your ball.

Bowling alleys everywhere have their fire-eaters, muscular gents who screw up their features into a grimace of desperation, whose

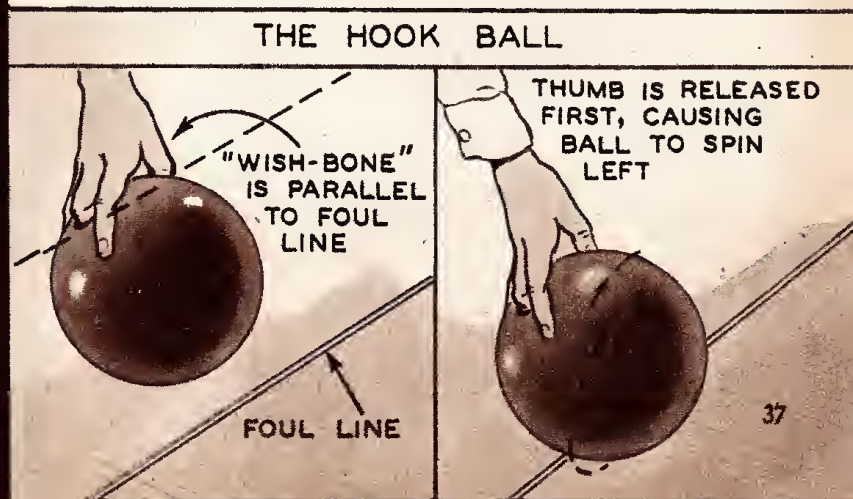

The hook ball—used by the world's outstanding bowlers; it has a greater strike percentage than any other type.

The start of the first step. The ball is shoved out and away from you toward the foul line, still supported by both hands. You are bent slightly forward.

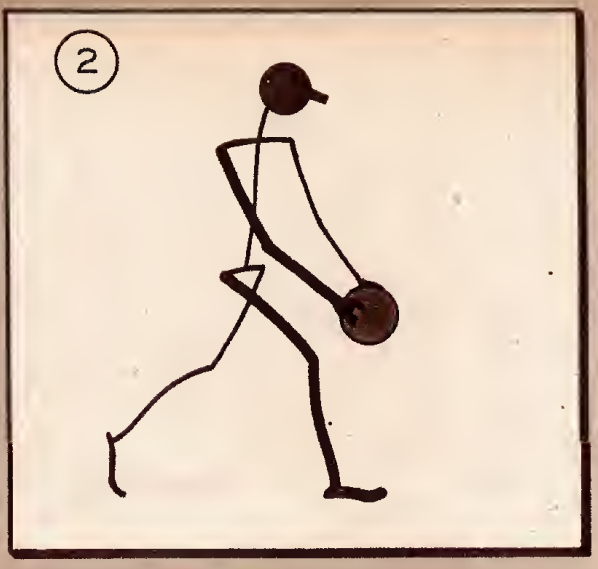

First step is taken. Ball is swinging back easily in a natural arc, completely supported by your straight right arm. Eyes are focused on the spot, not on pins.

arm and back muscles become hard as rocks when they swing the ball for delivery—but who will never be really good bowlers.

Here is a little test to show you the importance of relaxation. Stand about arm's length from an ordinary push-button wall switch, the type that turns your ceiling electric light off and on. Now deliberately make your body, leg and arm muscles as tense as you are able. While your muscles are tense, reach out and try to turn the light off and on with your index finger by punching the switch in full arm jab, bringing your right hand back to the chest between jabs.

10 MOST COMMON BOWLING FAULTS

1. Failure to have own shoes and ball.
2. Imperfectly fitted ball. Span too wide or too narrow. Holes too large or small.
3. Failure to spot bowl.
4. Failure to relax physically.
5. Bowling in suspendars or confining vests.
6. Failure to bring ball to shoulder height or higher on back swing, when bowler is in delivery position.
7. Failure to strive for perfection of approach and delivery.
8. Failure to keep amotions steady, avoiding both elation and anger.
9. Use of chalk. It will make your thumb sore, dirty your ball and clothes. Instead, wipe your hands with a clean, dry towel.
10. Failure to throw a ball of uniform speed, in spita of alley conditions.

In ten jabs you are sure to miss the switch several times. Now repeat your efforts to punch the switch, but with body and arm muscles relaxed.

The results should be much better, usually ten perfect contacts with the button out of ten tries. The lesson you learn from this is obvious: If, with muscles tense, you can't punch a light switch at thirty inches, what chance have you to hit a head pin sixty feet away with muscles tense?

Relax, that's the answer, but concentrate mentally on the job at hand.

The next thing to determine is the number of steps you want to use in approaching the foul line to deliver the ball. Four steps are most commonly used, once you have learned to handle the ball. This is the most satisfactory number from the standpoint of maintaining the body balance and imparting sufficient forward motion to the ball. Very fat persons or beginners usually find three forward steps more satisfactory. The five-step approach is to be avoided by all except expert bowlers.

To determine the proper distance for starting your approach for the four-step delivery simply pace off four steps, back from the foul line, then add about six inches so your toe won't touch the foul line when you deliver, and mark the distance on the floor with your heel, or even a piece of chalk.

Now take your position, heels on the mark you have made, about six inches in from the right-hand edge of the alley. Stand erect, and let your eyes travel from a spot about six inches in from the right edge of the alley at

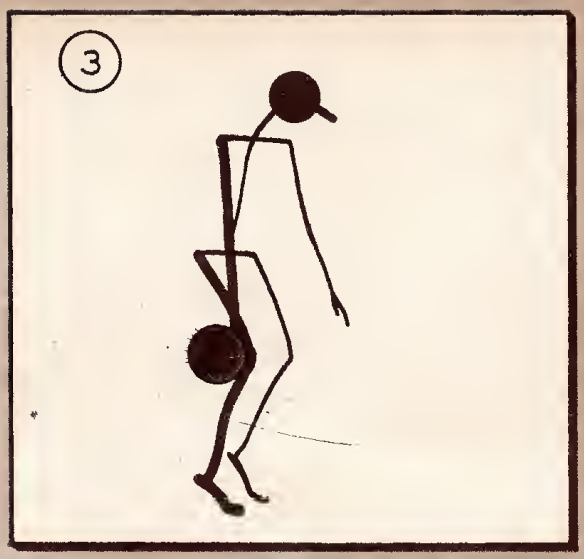

First step is completed and second step has begun. This position is the start of the three-step delivery, after supporting left hand has been removed.

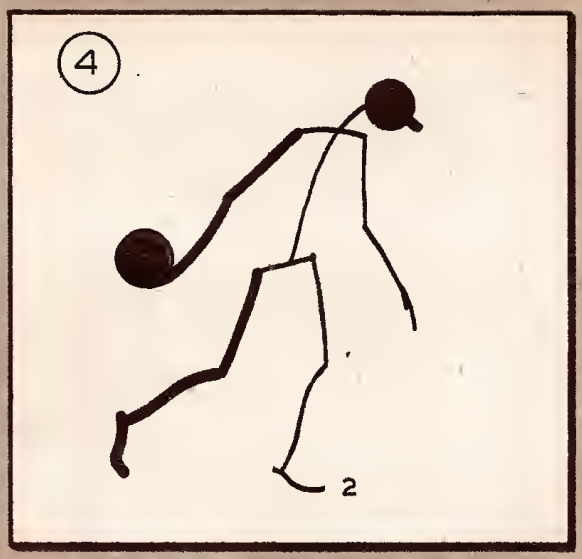

Second step is completed, third step is started as the ball swings upward. Knees are bent naturally, body is relaxed and bent forward. Eyes on the spot!

the foul line in an imaginary line along the alley surface to the head pin. Somewhere along this imaginary line, from ten to twenty feet from the foul line, find a spot on the alley bed, and focus your eyes on that spot.

This spot may be a darker board in the alley bed, or a lighter one. It may be a corner of a board, where it joins another of lighter or darker color.

It is at this spot you are going to throw the ball. After the spot is selected you are not to look at the pins until after the ball is delivered. If you are near-sighted, select a spot closer to the foul line, but no closer than four feet from this line.

The reason for picking a spot and bowling at it, rather than aiming and throwing at the head pin sixty feet away, is that it is easier for anyone to hit an object the closer it is to them. For instance, throw a sofa pillow at a door five feet away and you can hit it every time, back off thirty feet and you will miss now and then. By the same logic, it is easier to roll your ball over the spot ten feet away and depend on a projection of its path to place the ball in the pocket between the No. 1 and No. 3 pin, than it is to aim and throw at the target 60 feet away.

You have taken your position, ball in hand, heels on the mark about twelve feet back of the foul line, six inches in from the edge of the alley. When the proper time comes you are going to lay the ball about six inches in from the right edge of the alley, at the foul line.

Remember you are relaxed, legs straight, elbows bent at right angles, ball at about belt

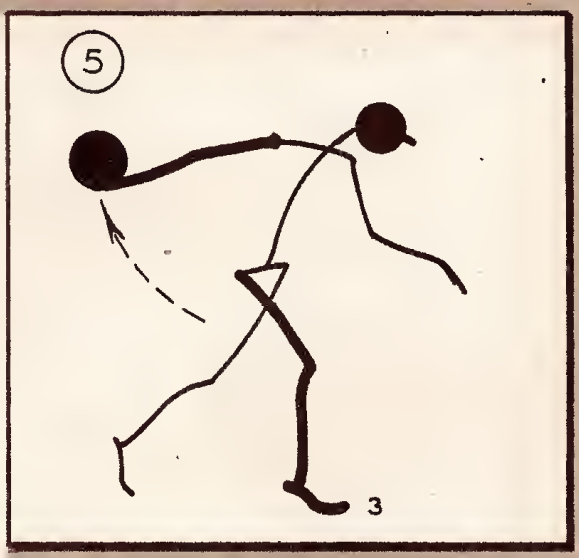

As the third step is completed, the ball reaches the height of its arc on the backswing, at a point at least as high as the shoulder. Eyes still on the spot!

The fourth step naturally pulls the ball down and forward. Left foot slides forward and ball is released naturally at the end of slide, not forced or "pushed."

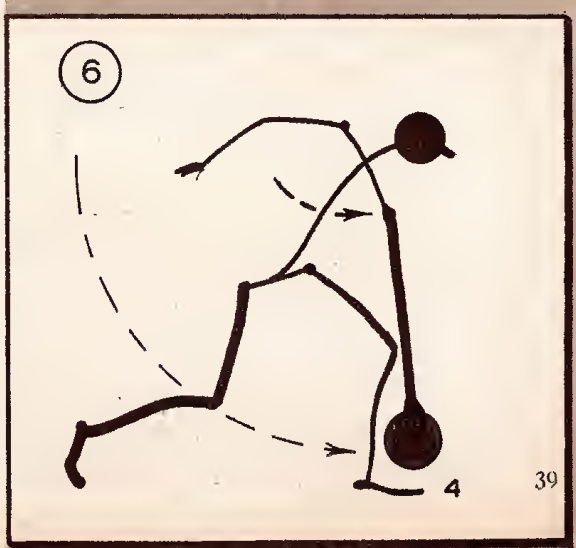

height, weight of the ball supported mostly by the open palm of the left hand. Your body is bent forward a bit at the waist. Never bend your knees until you have started your stride to the foul line. The thumb of your right hand is pointed at the head pin. The thumb is about four-fifths of its length in the hole. Your grip on the ball is firm, but not that of a drowning person on a stick. Avoid any semblance of a rigid grip, or "pinch."

The first step forward is taken with your right foot, and as you take it, the ball is shoved out and away from you toward the foul line, still supported by both hands. You are bent slightly forward at the waist. Keep your eye on that spot. Right thumb still pointed at the head pin.

The second step is with the left foot forward, and as you take it the left hand is removed from its supporting position. The ball drops in a natural arc and is supported completely by your straight right arm. Your knees now bend naturally. Forget the pins. Eye on the spot.

The third step is with right foot forward again. The ball continues its backward movement and reaches the height of its arc on the backswing, at a point at least as high as your shoulders. Knees are bent naturally for comfort. The pins haven't moved, and won't Watch the spot.

The fourth step, left foot forward, naturally pulls the ball down and forward in the same arc it traveled in the back swing. The fourth step brings your left foot forward in a definite slide or glide, almost in the center of the alley and about six inches back of the foul line. As the forward motion of the left foot ceases, release the ball—but make no definite effort to push or force the shot. Let the momentum the sixteen-pound ball has gathered in the down swing propel it, and let your right arm follow through, easily and gracefully, to a point over your head. Do not take you eye off that spot until you have finished the follow through.

Did your ball curve to the left as it approached the head pin?

If it did, you turned the ball to the left as you brought it down on your fourth step. This is a natural turning of the arm, caused by the construction of the shoulder and its reaction to the weight of the ball at the end of the arm.

If your ball went straight, make no attempt to turn it into a curve until you have had more experience. Concentrate instead on pointing your right thumb toward the spot you have selected on the alley surface as you

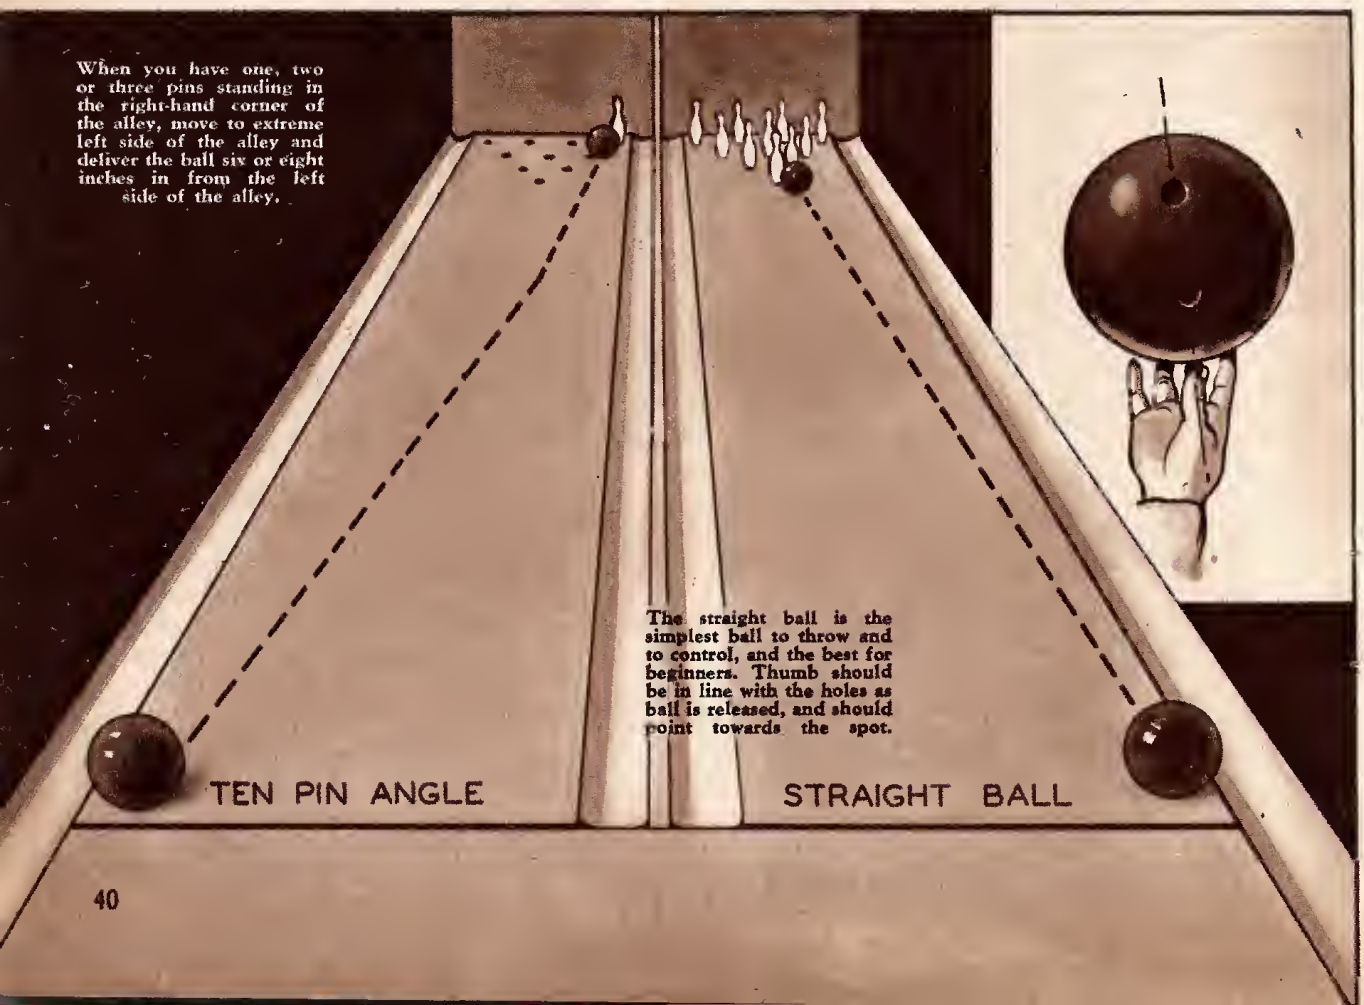
When you have one, two or three pins standing in the right-hand corner of the alley, move to extreme left side of the alley and deliver the ball six or eight inches in from the left side of the alley.
The straight ball is the simplest ball to throw and to control, and the best for beginners. Thumb should be in line with the holes as ball is released, and should point towards the spot.
TEN PIN ANGLE
STRAIGHT BALL

Strike! At the right are a few of the bowlers who took part in the 39th renewal of the American Bowling Congress held last year in Cleveland, Ohio.

deliver your ball. This puts the thumb out in front at point of delivery, fingers behind the ball. The thumb always leaves its hole first, before the second finger, or second and third if you are using a three-finger ball.

If your ball curved after it left your hand, your thumb of the right hand was pointing at the foul line when you deliver the ball. That is, the thumb and index finger formed sort of a wish-bone, which was parallel to the foul line, with both thumb and finger pointing at it. (See diagram).

The three-step delivery, referred to previously as best for beginners, is the same as the last three steps of the four-step delivery. Start your forward motion, ball slightly extended before you. Take the first step with your left foot, instead of your right. Remove the supporting left hand as your left foot goes forward and let the ball fall into its downward arc. Continue as with the four-step delivery.

Practice your delivery until you do it automatically, with ease, confidence and grace. Always practise with a ball in your hand. This weight is necessary to co-ordinate your timing, and hours of practice without a ball are not only wasted but harmful.

A straight ball is safest for a person bowling only a few times a week. It is easier to control, with less practice. A curve ball should be cultivated only by the individual who has ambitions to be a really excellent bowler. Even then it should be the "hook" ball, rather than the curve that the individual should strive for. This is a curve ball that breaks fast, traveling in a straight line toward the No. 3 or No. 6 pin, then curving sharply from right to left and coming into one 1-3 pocket. (See diagram).

The advantage of the hook is that it reduces the tendency of the ball to deflect, or change its path after striking the pins, and will carry through to get the No. 5 pin even on thin hits. Thus, the hook ball will get more strikes, also due to the fact that the spinning motion of the ball is imparted to the pins, resulting in more "scatter" strikes on poor hits.

To get a really fast-breaking hook it is necessary that you turn your hand to the right on the backswing. Then, on the last step to the foul line your wrist turns to the left throughout the arc of the down swing, bringing your thumb toward you and enabling the middle finger to give a distinct spin to the ball as it leaves the hole (middle and fourth finger on a three-finger ball).

I repeat, don't try to develop a hook unless it comes very easy for you, and you intend to bowl a great deal. From all practical angles it is better to perfect a straight ball first, keeping the thumb ahead of the ball at all points on the backswing and delivery, and not turning the wrist.

Caution. Don't use too much speed. No really good bowler throws a terrifically fast ball. Your objective should be to throw the ball with the same force at all times, just hard enough so that you do not have to strain. There is no prize for breaking the pins and accuracy cannot be maintained with high speed. There is also the very practical reason that a too-fast ball will knock pins out of the alley that should be working to knock down

[*Continued on page* 116]

Touring Easy With Push-Button Top

THE picture above shows the operating mechanism of the automatic, or push-button top, on the new Ford de luxe club coupe. It consists simply of a piston and cylinder unit which raises and lowers the top by means of vacuum power from the engine, controlled from the instrument panel.

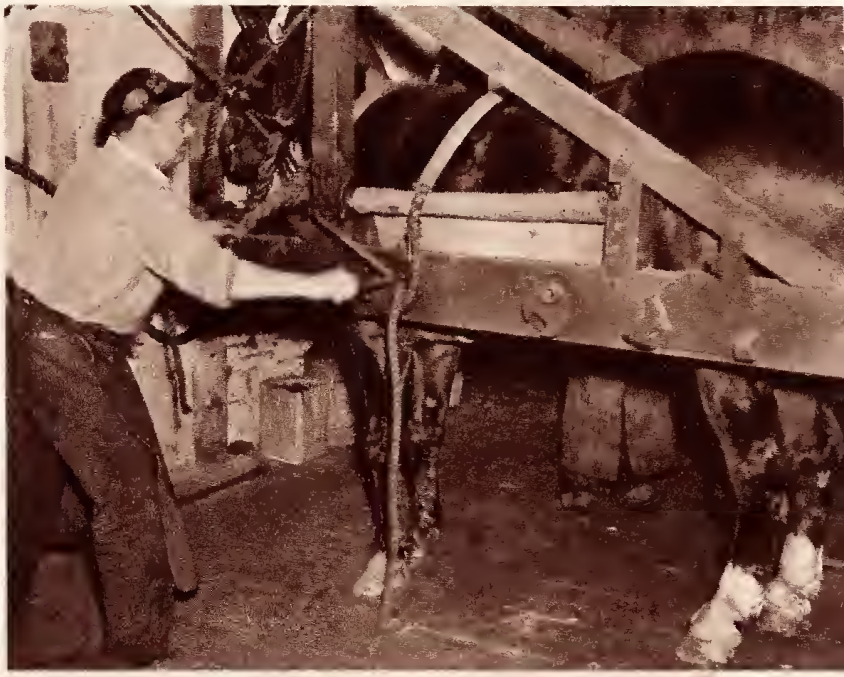

Dobbin Gets The Kicks Cranked Out

THIS canvas belt, when cranked, raises a horse almost off the floor so he can't get set to kick, and can be shoed in safety.

New River Steamer Is Streamlined

THIS new excursion steamer, which was recently completed in St. Louis, is an example of the trend of streamlining. Claimed by its owners to be the largest river excursion boat in existence, the craft is nearly nonsinkable due to 72 watertight compartments in the hull. It has five decks, four for the passengers and one for the crew, and is composed almost entirely of metal and glass.

Not Like The Old Days

STRETCHING high into the sky is the new 718-foot antenna tower of Station KDKA, in Pittsburgh. Backed by a 50,000-watt transmitting station, it was put into operation just nineteen years after this station broadcast the world's first scheduled radio program over a puny little 100-watt transmitter. The lineman in the foreground is connecting the frequency transmission line.

You Have To Be Part Tarzan For This Job

LANDING in tree-tops is nothing new for Frank Derry, famous parachutist, since he joined the United States Forest Service to help it develop methods and equipment for fighting forest fires from the air. The service plans to send men from planes to fight fires in inaccessible spots in our western forests. A sponge rubber and canvas suit helps to keep out the heat, and helmet and face guard are worn to prevent injury in landing.

Bottoms Up!

IT LOOKS like an aviator's nightmare of a mass crack-up, but it's just the way one airport solves a "parking" problem. Due to lack of space, these light planes are set up on their noses in a hangar at Boston Municipal Airport, their propellers protected from injury by wooden blocks. By using this unique, if unorthodox method, 15 ships can be stored in the same space that five would ordinarily use.

Your job!

Radio Servicing

MECHANIX ILLUSTRATED presents the second in a series of vocational analysis articles designed to help you choose the job best suited to you. No one except yourself —not even parents—can choose for you the work at which you will spend a lifetime. You may already be working at some job unsuited to your real talents. The facts presented in these articles are drawn from outstanding authorities in their fields, the tests carefully designed to reveal your real talents as well as to help you in analyzing them.

Next month the occupation of Photography will be discussed.

Modern radio receivers are complicated, and a service man must "know his stuff" if he expects to make a success of his business.

by Donald G. Cooley

A MAN from Missouri wanted to find out whether his son was destined to be a lawyer, a farmer, or a banker. He left the youngster alone in a room in which he had previously placed a legal volume by Blackstone, an apple, and a dollar bill, free to choose whichever object appealed to him. Ten minutes later the father looked into the room and found the boy sitting on Blackstone, eating the apple, with the dollar bill safely stowed in his pocket.

"He's going to be a politician!" cried the delighted father.

That's an exaggerated story, of course. But it does suggest a revealing experiment which —if you have decided you would like to be a radio service man—will tell you a good many things about yourself. Here it is:

Pick up an antiquated or discarded radio set and lock yourself in a room with it. Take

it apart. Put it together again. Trace the wires. Follow out the circuits. Try to replace screws in close corners where there isn't room enough to move your fingers.

How do you like it? Do you lose interest before you finish the job? Does the job seem to tough to you, too tedious, too hard to learn? Then think twice before you go in for an occupation that requires endless hours of exactly that type of work. But if you get a kick out of tinkering with the chassis, if it's a mental and manual challenge that keeps your interest keen—then you're very likely the stuff a good radio service man is made of.

Of course, deciding on a vocation isn't quite so simple as that. Have you ever stopped to think *why* you want to be a radio service man? There are plenty of good reasons, but only if they apply to *you*.

The main signpast pointing toward the lifework in which you will be most successful is labeled *interests*. You are especially well suited for radio work if some of these statements are true about you:

You already know more about radio sets than the average person. You have tinkered with your own set or those of neighbors. You are a "ham" operator or pal around with someone who is. You like to study diagrams and read about new developments in radio trade papers. You have a good working knowledge of electricity. You "talk the language" of radio technicians. You have put together apparatus of your own.

These traits indicate a strong aptitude for radio work, but they should be supplemented by other practical qualifications which you can analyze for yourself by taking the MECHANIX ILLUSTRATED vocational test on page 47.

An astonishing fact about radio service work is that three-fourths of its practitioners are in business for themselves. That's a record few other industries can match. Are you the type of man who yearns to hang out his shingle and be his own boss? Do you combine initiative with practical business sense? Then radio servicing offers you a fine opportunity to build your own business.

Remember, though, that running your own business is no bed to roses if you happens to be the kind of person who needs someone to keep pushing him. That's why those personality questions are so important in the vocational aptitude test.

Make no mistake about the fact that radio service work is practically tops among semi-professional occupations. Army data and

Above: The well-trained technician with a desire for travel will find many opportunities in shipboard radio operating. "Sparks" on a modern vessel, such as this one, is rated as an officer; is paid and treated as such.

Below: Commercial radio telegraph and telephone stations require expert personnel. An ambitious service man can rapidly graduate into this work.

Below: Many service men become well-paid salesmen because their technical background enable them to talk convincingly about radio sets to prospective customers.

Left: The booming aircraft industry is badly in need of competent radio men who can install, operate and service the complex communication apparatus that is an essential part of every airliner.

Below: Television is still hiding around that misty corner, but sooner or later it will be a big industry, offering lucrative opportunities to radio service men. And complicated television receivers like this one will need plenty of servicing!

other reliable sources agree that the electrician's vocation—of which radio repair work is a specialized branch—ranks highest of all skilled trades in its demand for intelligence and ability to learn. You bet you can be proud of your occupation, because the dimwits never get far in radio.

Let's be practical about this business of radio servicing. It demands plenty from you; its rewards can be in proportion.

Consider, first, the demands. You will be expected to diagnose and repair radio troubles right on the spot. When a man's set goes haywire in the middle of a Joe Louis slugfest, he wants action and he won't hesitate to call you at 10:30 p. m. to get it. Your health will have to be resilient enough to stand night calls. And your nerves. If you feel owly when you get a call just as you're ready for bed, the customer must never know it.

You have to have keen vision for close work, too. You should have an aptitude for "spatial relationships," as the analysts call it. In everyday language, that means that if you are given the parts of some disassembled mechanism, you can readily visualize them in their proper positions, and in reasonably short time can reassemble them. There are elaborate psychological tests to measure this particular kind of mechanical aptitude, but a little actual experience in assembling radio sets will leave you with little doubt whether or not you possess the quality. You can, if you like, work such a test on yourself if you will have a friend take apart some unknown mechanism—unknown to you, that is—and lay the pieces on a table. If you perceive swiftly that the switches, screws, nuts, and stampings are parts, say, of an electric iron, and if you can assemble them speedily with no parts left over, you may feel that your "spatial relationship" quality is okay.

You will notice that the vocational test for radio service men contains a number of questions that have little to do with mechanics, such as "Do you take good care of your personal belongings?" Believe it or not, those questions have a lot to do with your radio qualifications. It has been found that the chap who is careful and orderly in caring for his belongings is likely to be careful and orderly in working with a thousand and one small parts—and if he isn't, his workshop is going to be so cluttered in a week that he might as well go out of business.

In short—your personality and character qualities have a lot more to do with success

Test Your Aptitude for the Vocation of RADIO SERVICE MAN

Answer each question honestly, taking all the time you want; check "Yes" or "No" in the proper column	YES	NO
Do you already know more about radio sets than the average person?	.....	.....
Can you operate a typewriter, play a musical instrument, or do other things requiring skill with hands and fingers?	.....	.....
Do you have a good memory as a storehouse for small details?	.....	.....
Were mathematics, science, and shop subjects your favorites in school?	.....	.....
Are you conscientious—unsatisfied to leave jobs half-done?	.....	.....
Do you understand these technical terms: alternating current, transformer, condenser, loudspeaker, filament, amplification?	.....	.....
Would you spend more time at a museum exhibit showing electrical apparatus than you would at one showing animal groups, old books, oil paintings, or locomotives?	.....	.....
Do you think over a task before starting it, rather than rushing ahead?	.....	.....
Is your liking for working with your hands about equal to your liking for dealing with people?	.....	.....
Do you have a number of friends, acquaintances, or associates who are interested in radio or electrical occupations or hobbies?	.....	.....
Have you done much tinkering with your own radio set or those of neighbors?	.....	.....
Can you drive an automobile?	.....	.....
Can you stand fairly long hours with occasional night-calls?	.....	.....
Are you friendly, courteous, of good appearance to make a good impression when entering people's homes?	.....	.....
Do you have a good vocabulary, with ability to talk well enough to convince people you know your business?	.....	.....
Is your vision keen enough for delicate close work?	.....	.....
Would radio afford a reasonably complete outlet for your abilities?	.....	.....
Can you learn readily from books, follow complex wiring diagrams?	.....	.....
Do you have at least a grammar school education?	.....	.....
Are you a "ham" radio operator, or do you have a friend who has an amateur station?	.....	.....
Do you take good care of your personal belongings?	.....	.....
Can you follow another's directions accurately?	.....	.....
Are you a "self-starter"—i. e., enough initiative to keep going under your own steam without someone to push you?	.....	.....
Are you free from handicaps that might make it difficult to acquire manual skills or to get around easily?	.....	.....
Do your friends think you would make a good radio service man?	.....	.....

To score yourself, count 4 for each "yes" answer; "no" answers do not count. A score of 72 or better indicates that you are well qualified for the technical phases of the vocation; a score of 80 or higher, that you probably possess both technical and commercial qualifications in satisfactory degree. If your score falls much below 68, it would be well for you to consider a different occupation.

in radio than they do in other mechanical fields. Your work will carry you into customer's homes. You have to make a good impression. You must be neat and courteous, and it helps plenty, in any field, if you really *like* people. For you will be almost as much a salesman as you will a repair man, unless you expect to confine yourself to shop or factory. You should be able to talk easily, with enough words at your command so you won't have to stumble and grope. If you really know your stuff, the words will take care of themselves.

Do the rewards of the radio service man justify the superior qualifications demanded of him? Let's examine what the trade offers.

You still hear it said sometimes that radio is an infant industry. It isn't. It's one of the most solidly organized industries you can find anywhere in the world. It is still growing, and technical improvements will continue to come, unpredictably, for years. But the days are gone when anybody who could talk impressively about kilocycles, audio-frequency, rectifiers and the like could call himself an expert and get away with murder. Today you have to *know your stuff*, if only because there are approximately 100,000 service men ready to compete with you.

Fortunately, excellent training in radio service work is readily available, wherever you may live. High schools, vocational schools and colleges offer various types of courses embracing radio. Make local inquiry about these; your high school principal or board of education can help you.

There are also excellent commercial schools which specialize in radio training. These are of two types: residence schools, and

[*Continued on page* 118]

Bossie Gets The Breaks

ABOVE we see a demonstration of the newly-invented diathermy machine for applying heat treatment for adhesions and other ills to the udders of cattle. At the right, a contented cow peers out from behind an electric fly screen, the most recent device to save wear and tear on bossie's fly-swatting tail.

It Would Be Some Fall!

BRYANT GUTHRIE, of Edinburg, Texas, has his own ideas of what it takes to get up in the world. He cooked up this awesome looking contraption from short lengths of pipe and the frame of an old bicycle. He plans to use it as an advertising medium.

The Evil Eye?

NO, AND she isn't trying to frighten anybody, either. Her eye is being illuminated by the ophthalmoscope, an important eye-testing instrument, which enlists the aid of Polaroid to shoot a beam of light straight through the eye into its background.

Beauty Takes a Beating

The ugly looking contraption at the upper left exercises muscles which are seldom used. We know the picture of the pretty girl above wes taken before the battle—she looks too peaceful to have gone through it! Below is a rubber mask through which hot water circulates, increasing the circuletion of the blood, end toning up the skin. At the lower left is an electrical heat ped to open pores so that beauty creams may be applied more effectively.

WHAT women will do to make themselves more beautiful is strikingly illustrated by the pictures on this page. The devices which today's beauty experts have cooked up to improve on nature look like weird contraptions out of an Edgar Allan Poe horror tale. Torquemada, supreme inquisitor of the Spanish Inquisition, would undoubtedly blush with shame if he were alive to see the tortures which he overlooked during his reign of terror.

No sir, the next time we get to thinking about what an easy life the ladies lead, we'll just turn to this page, take a squint at these pictures, and breath a deep sigh of relief that we're of the opposite sex.

Midget Casts Mighty Beam

THE newest development in photography is the "mighty midget" photoflash bulb, the size of a walnut, and smaller than a golf ball. The picture at left shows the bulb in action at Cleveland's mammoth Public Hall. Placed in a spot-type reflector, the lamp was placed 265 feet from the auditorium stage, nevertheless, so powerful and direct was the "hit" scored by its flash beam that a camera was able to "get" the man shown on the stage.

Hurray For Our Side!

THE girls below are trying out "Goal-Hi," a new type of basketball game which recently had its premiere in Lawrence, Kansas. Invented by Dr. F. C. Allen, the game can be played either indoors or outdoors, around a goal of regulation size and height mounted on a tripod metal pedestal.

Fire When Ready, Gridley

LOOKING more like a machine gun than a microphone, this directional "mike" is the newest device for broadcasting crowd events. The longer tubes are used to pick out individual noises in a very small area of the crowd, while the shorter tubes catch the "background" noises of the entire gathering.

BOX YOURSELF A BUNGALOW

Top picture shows the box bungalow in early stages of construction. Above: Mr. Church and finished house. Right: Interior construction.

A REVOLUTIONARY type of home construction has been inaugurated by A. A. Church, of Porterville, California. Mr. Church built the sturdy little bungalow, shown in various stages of construction on this page, entirely out of new grape-picking boxes. He claims that the box walls form dead air insulation which gives a cooler building in summer and a warmer one in winter than are found in more orthodox types of construction.

The house has been carefully built, and all small details which are necessary in any such pioneer building venture have been worked out.

Enthusiastic over his house, Mr. Church predicts that it is but the first of similar houses that will spring up over the nation.

CAN THIS WAR

Modern fortifications along the Maginot and Siegfried lines have made France and Germany "invasion proof." The result may be a war no nation can win!

by Maxwell Hamilton

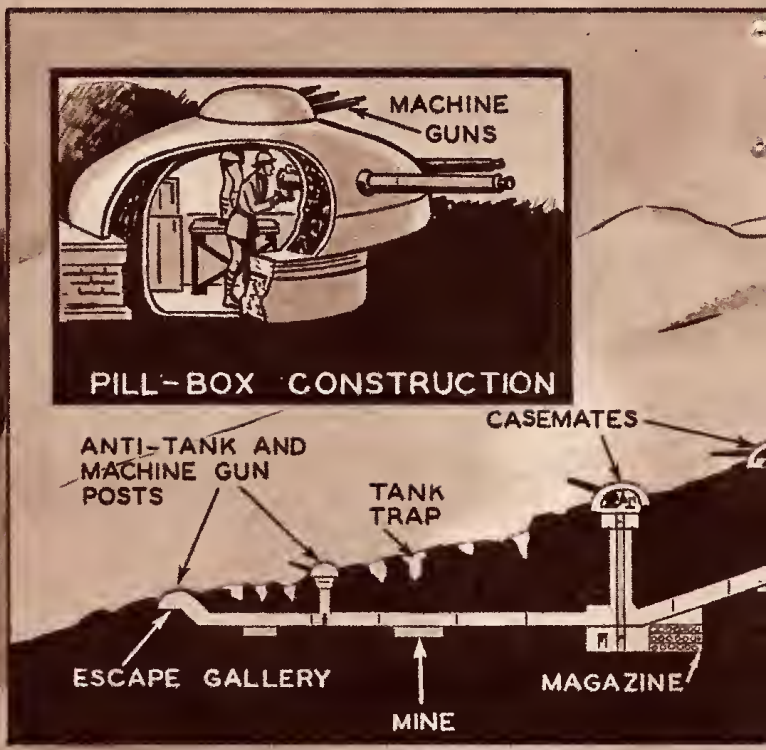

WHAT happens when an irresistible force meets an immovable object?

This age-old problem in physics, a familiar question to every school boy, seems destined to find an answer in Europe's latest armed conflict. For the present "war to end wars" is a contest between two of the world's greatest immovable objects—the Siegfried and the Maginot lines!

Imagine, if you can, an advancing horde of 2,000,000 men. It is armed to the eyes with

BE WON?

Above is a comprehensive cross-section sketch of the famous Maginot line, showing the traps which are waiting for an attacking foe. Below is the inside of a typical sector of the line, showing the subterranean passages, barracks, and ammunition magazines. A huge army lives underground as France waits a German attack.

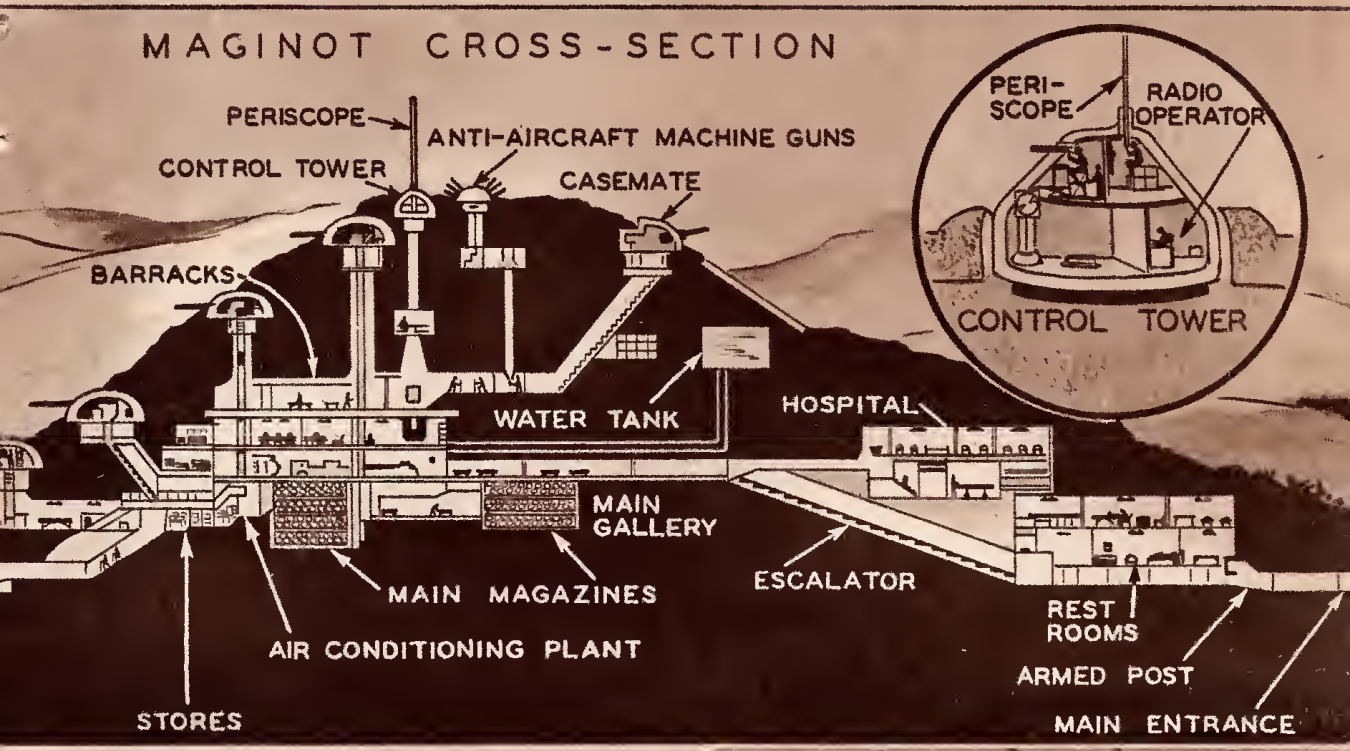

Right: French troops passing through a tunnel of the Maginot line, more than 100 feet below the surface.

high-speed, rapid-firing tanks, motorized cavalry and infantry, mobile artillery and ammunition units, every known type of poison gas, and the most modern and efficient equipment available for pouring forth a ceaseless storm of shot and shell, endless tons of lead, steel and flame. Magnify this glittering array of death on the march five times over—and, against it, the French defenses on the Maginot line still would remain impregnable!

On the other hand, should the Allies abandon such snug security and launch an attack of their own, just as much power and strength and cunning, multiplied many times over, would avail them nothing. The German Siegfried line—not 10 miles away—is just as redoubtable, just as impossible

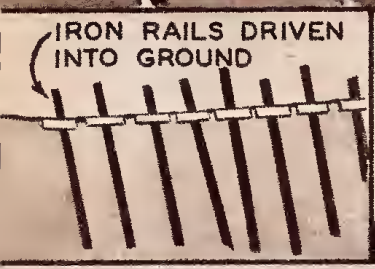

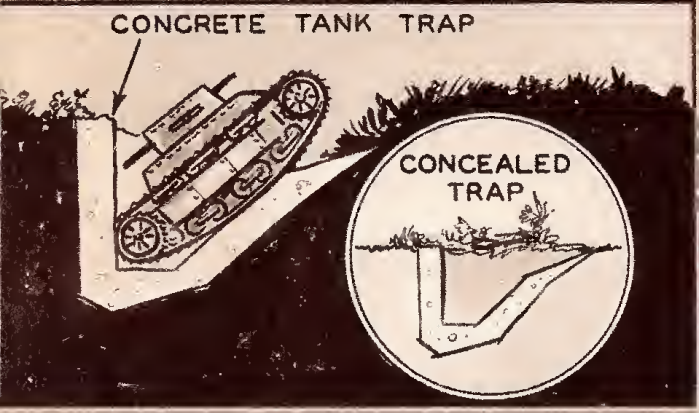

The drawings above show the methods used to foil the advance of oncoming tanks—iron rails driven into the ground, and cleverly concealed pits into which tanks fall and are rendered useless. Upper right: A French fort, part of the Maginot Line. Below is an underground power room, which generates electricity for the Line.

to penetrate, as the French fortifications.

It is Armageddon, giant against giant, with victory in the lap of the gods.

Of the two great bulwarks, the French Maginot line would seem to have whatever slight advantage exists. Begun 10 years ago, it has cost France $300,000,000 and has taken all of the intervening years to complete. It is modern, it is thorough, it is highly scientific. The German counterpart, on the other hand, is a product of feverish building over the short space of the last year and a half, with the natural weaknesses of hasty construction deemed certain to appear under fire.

It is to the late Andre Maginot, ex-War Minister of the French Republic and veteran of the First World War, that credit for these amazing fortresses must go. Lying wounded and despairing in a 1917 base hospital, Maginot, a sergeant of artillery, stared at the bullet-pocked ceiling above him, gritted his teeth and groaned with pain.

"I *hate* war," he muttered. "I abhor it."

Eighteen years later, in a meeting of France's Supreme Council of National Defense, Maginot, the new war minister, 6 feet 2 inches of man, rose to his feet, outlined on a map the French border from Luxemburg to Switzerland and stated his position coldly and determinedly.

"We must build a wall along here," he said, "that the devil himself can't break through!"

The result: the Maginot and, later, the Siegfried line.

In a time of peace, you might cross and recross the Maginot fortifications and see nothing but rolling hills, dense thickets and an occasional peasant's shelter. If you were particularly observant, you might note a scattering of small, dome-shaped mounds

protruding from the earth, mounds which—in any other locality—would certainly be taken for underground reservoirs or drainage tanks.

Far from drainage tanks, these mounds mark almost the only visible evidence of the greatest fortifications in the history of France! These are pill-boxes, heavily armed, constantly manned—and facing east. What looked like an ordinary thicket turns out to be an enormous cruel mass of twisted barbed wire, and what might have been taken for a peasant's shelter is, in reality, a block-house, with walls 60 inches of cement and steel and blended into the color of the hillside.

The Maginot defenses really comprise three parts.

The first consists of the pill-boxes—the dome-shaped mounds—built along the base of the hillside. Although connected with the other fortifications by underground passageways, each pill-box is a separate unit, isolated, to be sold out to the invader at the highest price. It is manned with the very latest type machine guns that can fire for 24 hours without a stop. It has sanitary facilities and is stocked with ammunition, food and water; for it is its purpose to impede the enemy, discourage his advance and then surrender only when its occupants are dead. For volunteer "suicide squads" will man *these* outposts.

Behind the pill-boxes are the block-houses, containing machine and field guns and connected with each other, and the rear, by subterranean tunnels. They, too, are independent units, capable of standing on their own and—when pill-boxes have fallen—of setting off mines in the passages between these units in order to cut off access through that quarter. The third part of the line also consists of block-houses, only this time they contain more powerful defenses—75 and 155 millimeter cannon (3- and 6-inch)—radio stations, observation posts, field headquarters, and so on.

But these are but surface manifestations of the great Maginot defenses, and, like an iceberg, France's newest forts are ⅞ths under the surface. Behind the three front lines, and deep in the bowels of the earth, are the living quarters and administration divisions of the defenders. Thus, as fast as front line troops grow weary, fresh detachments are ready and

Left: A mountain dugout on Germany's Siegfried Line, not far from France's Maginot fortifications. The two photographs below show how Germany expects to keep the giant French tanks at bay. The one at the left shows a line of concrete tank traps, while the one directly below shows a double barricade of crossed angle irons.

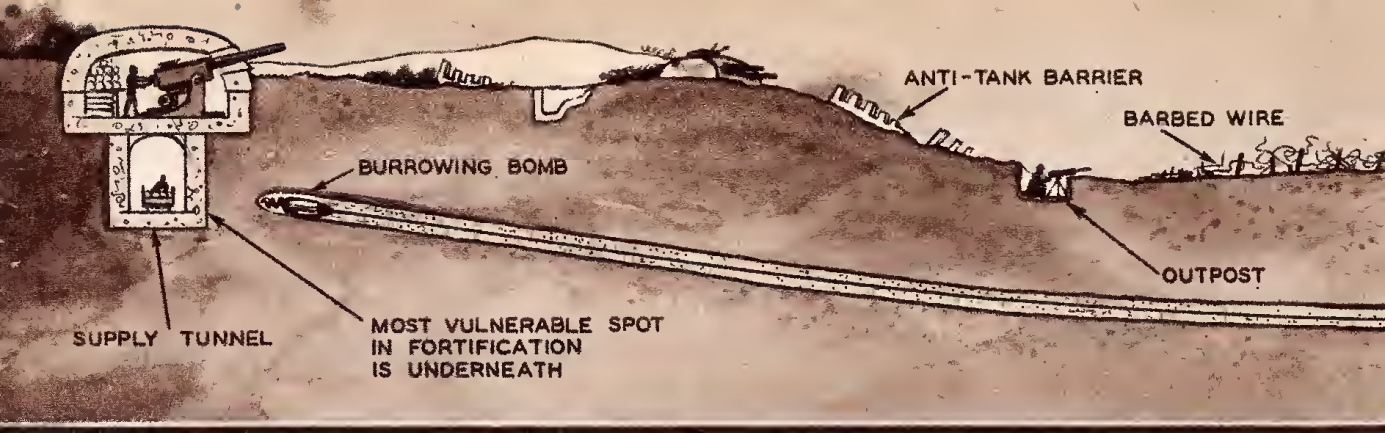

On these pages our artist has drawn a "Burrowing Bomb," which might answer the invulnerability claims of both the Germans and the French as to their defenses. This mechanical "mole" would carry an explosive charge and be directed through a control cable by men in the dugout from which it was started on its way. How it would operate is shown in the upper sketch. At the right are shown close-up drawings of the "mole." Could Hitler have had such a device in mind when he uttered his threats of "weapons known only to Germany?"

able to go into service. And should the enemy penetrate the three outer walls, he is met back of the lines by brigade after brigade of well-equipped fighters who pour out of the cavernous reaches of the underworld from all sides.

Within the heart of the hillsides, an army can live for months in the ingenious recesses of which Andre Maginot dreamed. There are comfortable steel-lined barracks, air-conditioned and strengthened to withstand five times the assault put upon them in their first tests. There are escalators from one level to another, kitchens, hospitals, ammunition dumps, reservoirs—even wine cellars and recreation rooms. Telephone cables are steel-insulated to withstand the shock of high explosive, and when they fail there is the radio. If that goes dead, then pigeons go into action.

The fact that the superstructures are located on hilltops minimizes the poison gas nuisance. Gas needs dry weather and low, windless country; but, even if it came, the Maginot line would be ready for it. Guns are set in water-tight jackets and embrasures that defy the entry of gas; and the smoke and fumes from gun discharges within the fortifications are ingeniously disposed of through ducts which permit exit but not entrance. The air in these defenses, aided by pressure, is as pure as that of a mountain cave.

As safe as they are inside, the inhabitants of both the Maginot and Siegfried lines are amply protected on the surface. Andre Maginot, as well as his rivals across the German border, realized that such defenses might be surmounted or crushed easily by the fast and powerful tanks of the war that was to come, and this angle has been taken into consideration.

Machine gun nests, block-houses and other defensive works are skirted by a veritable morass of tank traps. Thousands of steel rails, set end upright in solid concrete and steel, and with their upper ends protruding at different heights out of the earth, stand like a garden of irregular bean poles to impale the fastest tank and strip its belt tracks. If an enemy driver successfully skirts this "asparagus," and is not disabled by the withering anti-tank cross-fire which besets him from pill-boxes and block-houses on all sides, his troubles have just begun. For he will find that the most solid earth will turn out to be a deep, wedged-shaped pit, concealed by grass and underbrush, and into which he will sink out of action.

In the meantime, the infantry is having its troubles in jungles of barbed-wire, carefully woven and supported in days of peace, when things can be done carefully and devilishly. In some instances, these nests of wire are even electrified to put the crusher on any army that dared to try to pass or cut them.

In this latter respect, the German and French defenses are much the same and present no dissimilarity to the casual observer. The German "asparagus" protrusions are different only in that the rails have been encased in concrete and stretch in columns of four for miles and miles along the border. They were built by Fritz Todt, German road expert, who drove an army of 500,000 workers for more than a year before completing the project last Summer.

With this minor difference, and despite the denials of Adolf Hitler, the German West Wall—as the Siegfried line is called in the Reich—is almost a copy of the Maginot fortifications. There are reputed to be almost 600 of the hillside, pill-box forts of the Maginot type on German soil, all complete with living quarters, air conditioning, latest

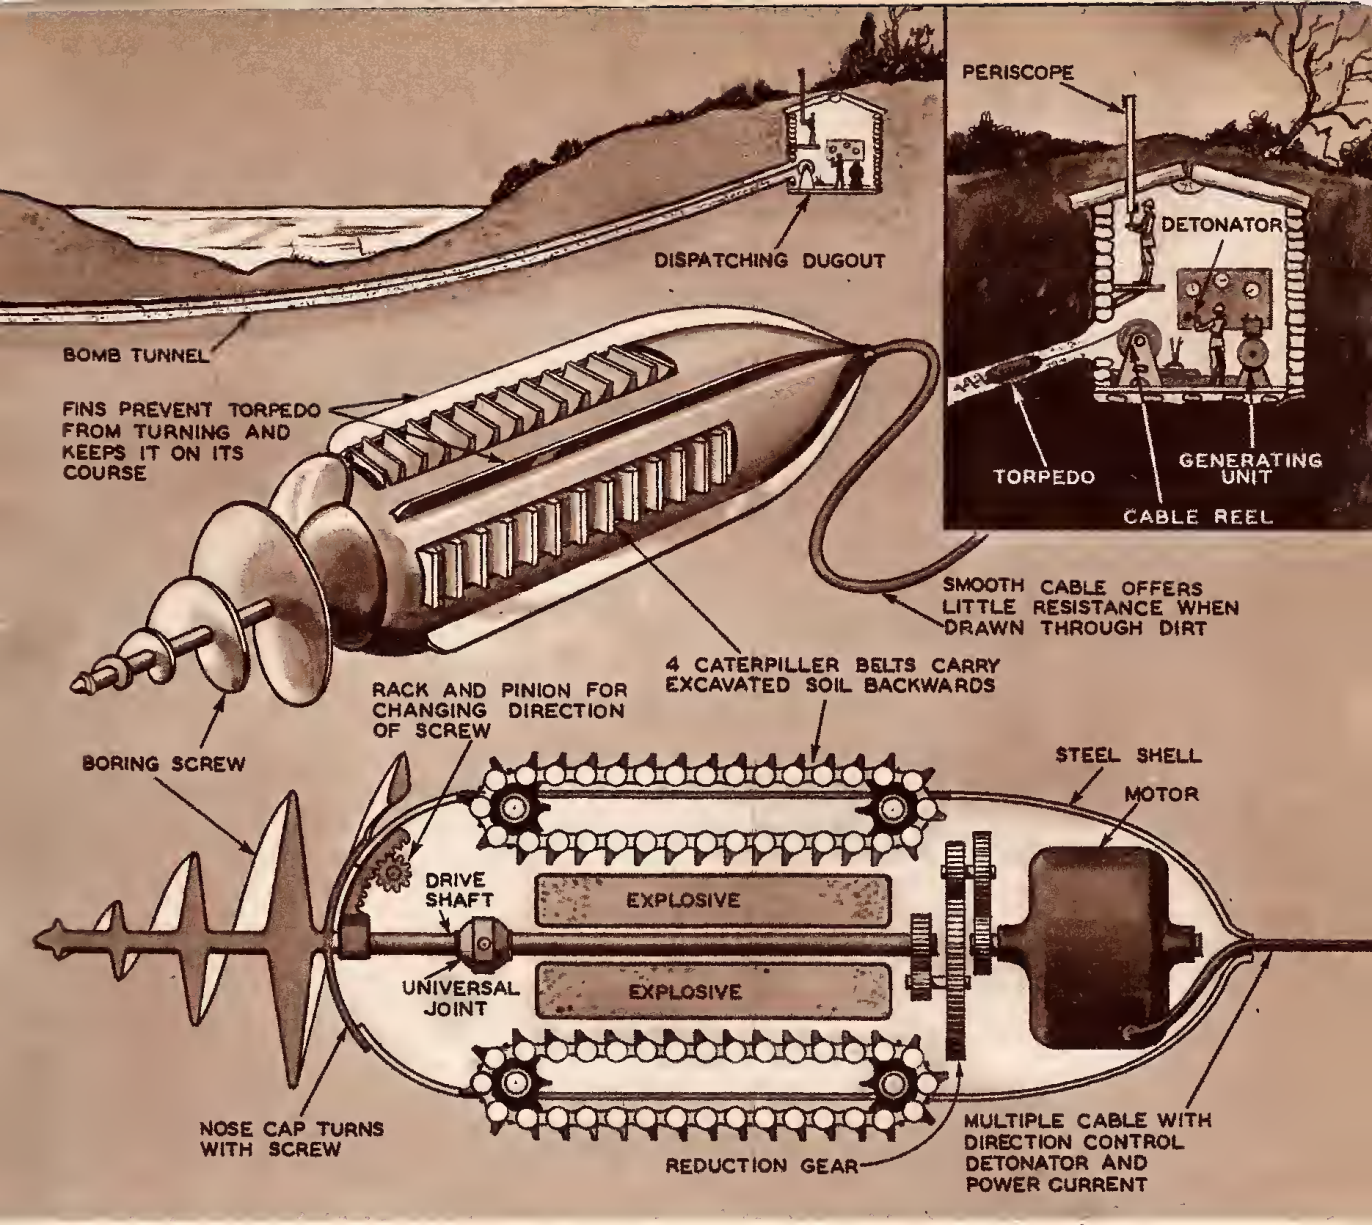

type armanents, plumbing, telephones, radio and recreation facilities.

The German barricades extend more than 400 miles along the frontier, are drilled—in some places—as much as 30 miles into German territory, and are said by Der Feuhrer to be able to withstand any attack, whether from air, by tank, by gas or heavy artillery.

The British have deprecated the efficiency of the German line on several occasions. According to their reports, the subterranean dug-outs of the Germans may be able to thwart any human enemy but were flooded by the high waters of the Rhine last Summer, forcing a hasty evacuation. Furthermore, they say, the German soldiers are unhappy underground because of the fact that the galleries are crammed to overcrowding with ammunition, the air conditioning doesn't work and ventilation is bad, and there has been a marked shortage of food, forcing the troops to come out and show their hideaways.

Regardless of these rumors, however, it is apparent that both teams have power aplenty to stave off attack from all sides, and neutral observers are of the opinion that this new war really may be *the* war to end wars. They point out that, with neither side able to gain any ground on the other, they will have to resort to air raids and bombing of non-combatants, and eventually—like invincible knights of King Arthur—both sides will battle to exhaustion. And the conflict will be at an end.

But man's best laid plans sometimes go awry. Both Germany and the Allies are rumored to have some secret and amazing weapons which they are saving till the real scrap begins. If these rumors are true, then guesswork goes out the window.

The question is, however—Have the boys got such weapons?

Loom Makes Crippled Children Happy

LIFE will be a lot pleasanter for crippled children, thanks to the bed loom shown here, the invention of Margaret Greave, of the Riley Hospital for Crippled Children, in Indianapolis. Miss Greave is shown teaching a young patient how to operate the loom. With it, Miss Greave won the first place award of the National Association of Occupational Therapists for the outstanding contribution of the year.

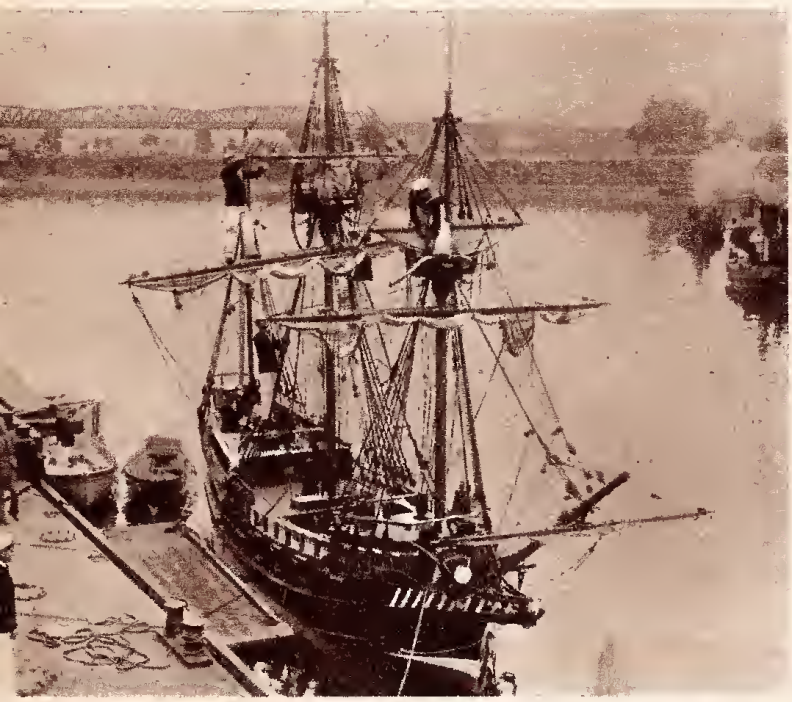

"Golden Hind" To Sail Once More

THIS half scale model of Sir Francis Drake's famous fighting ship, *Golden Hind,* was built by members of the Mechanical Training Establishment, at Plymouth, England. The men are giving the handsome little ship a thorough going over so that it will be ready for exhibition and sailing during Navy Week. At this time the public is admitted to the Royal Dockyards, and funds are collected for widows and orphans of British sailors. The men appear like giants against the rigging.

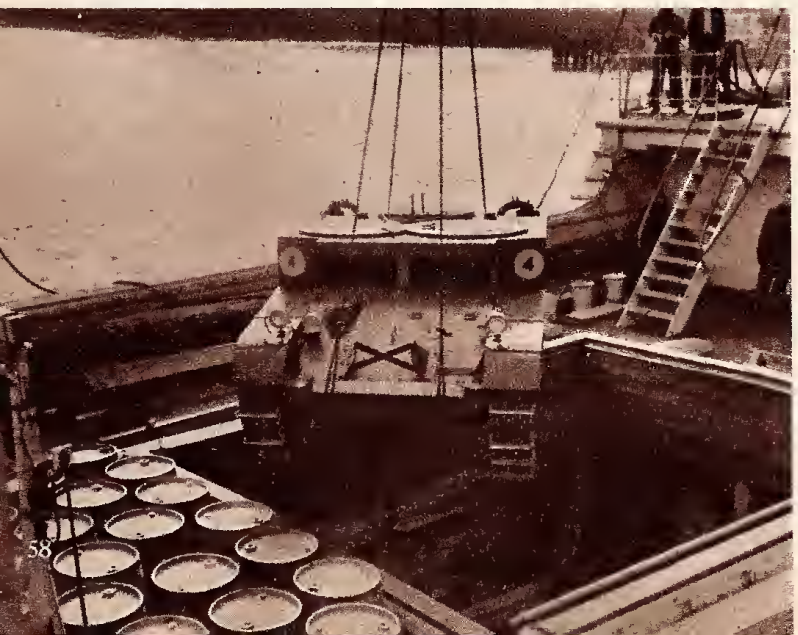

But Will The Penguins Like It?

ONE of the two army tanks to be used on the United States Antarctic Expedition is being loaded on board the cutter *North Star* at the army base in Boston. The tanks weigh eight tons each, and are equipped with special ice clamps on the tractor belts for greater facility in travel over the icy wastes of the South Pole region.

FLOWERS THAT LIVE FOREVER!

ROSES that never fade or wither, carnations that look fresh and glamorous for years, bridal bouquets or corsages permanently preserved in all their beauty, exotic plants and blooms brought home just as they were found in their native jungles, all these dreams of lovers of nature have been made realities by a process developed, perfected and patented by Philip Joffe, a New York City High School teacher, in the improvised laboratory of his apartment near Central Park West.

Mr. Joffe, who holds six other patents, one a musical device endorsed by such authorities as Damrosch, Rachmaninoff, and the late Caruso, is one of that tribe of so-called garret inventors who refute the notion that all important inventions of the future will emanate from elaborate research laboratories maintained by industrial corporations.

[*Continued on page* 125]

A garden on the living room rug. Philip Joffé looks over the permanently preserved plants and flowers.

Testing the temperature of the solution. Too hot for the hand to bear, it is harmless to the flower that is to be preserved. Right: Watering a preserved "garden."

Where Do They Keep The Towels?

THIS new foreign limousine has a hot and cold water folding wash-basin of aluminum built into its right front fender. Beneath the hood is a 2-compartment tank holding two and a half gallons of water. The hot water section is heated by exhaust gases passing through a spiral pipe. The two faucets give water of any desired temperature. The basin is automatically emptied when it is folded into the fender.

One Man Can Start Plane With Crank

AN UNUSUAL safety feature of this light plane is the strategically placed engine starter crank which is installed so that it is possible for the pilot to control the throttle in the cabin at the same time he is "turning over" the motor. This eliminates all danger of the plane "running away" and at the same time there is no necessity for another man to turn over the engine while the pilot sits at the controls.

Sun Supplies Heat For This House

OLD SOL provides the heat for the hot water system in this new sun laboratory, recently completed at Massachusetts Institute of Technology for research on using the sun rays for house heating and power generation. The man on the roof is Dr. Byron B. Woertz, research assistant, who is inspecting energy collectors, or "heat traps," in which circulating water is heated by sunlight and stored in a large basement tank for future use.

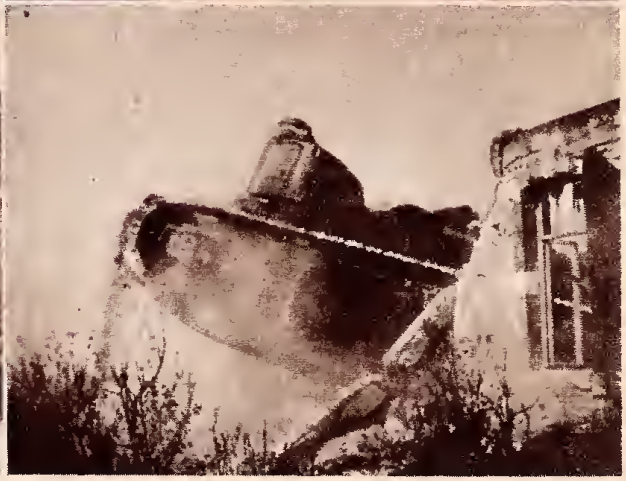

90-Ton Tanks Are France's Fullbacks

THE battering power of the new French 90-ton tank is terrific, far exceeding anything known in the last World War. As the above pictures show, the mechanical monster plows through stone and brick walls as if they were made of papier-mache, and it snaps trees as if they were twigs.

Ski Patrol Brings Aid To Injured

OUT on the slopes of Oregon's Mount Hood expert mountaineers have organized a ski patrol which has already rescued 310 skiers who were in serious predicaments. Members of the ski patrol are trained in handling toboggan "ambulances" under any conditions.

WOOD Makes a

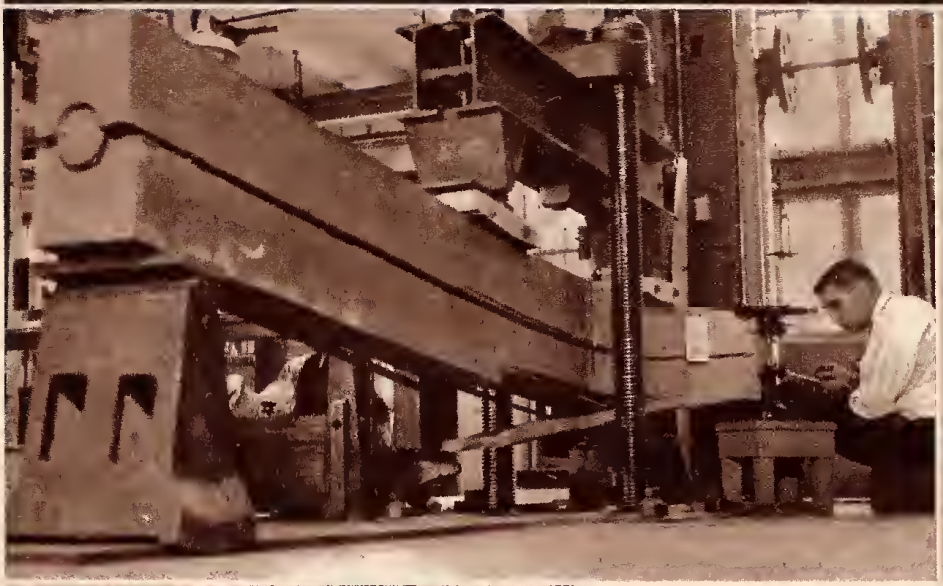

One of the methods of research used by the Forest Products Laboratory is shown at the left. A length of structural timber is undergoing a loading and bending test. The beam is being subjected to pressure as an expert maintains a telescope on the point of greatest pressure to determine characteristics of this wood for building purposes. A load of 50,680 pounds was applied to this piece before breakage.

SINCE early days, wood has provided Americans with homes, stores, farmsteads and factories. Over half of all the wood cut from the forests still goes into building and housing. But in recent years wood construction has lagged and other materials have come in, because antiquated, inefficient wood building methods have persisted. The provision of easily erected, economical and comfortable homes for families of small means is one of the most urgent needs of our time, and the development of more efficient use of wood for

Specialized service in wood identification is offered by the Forest Products Laboratory. One of the experts in this line is Arthur Koehler, shown above studying woods with a microscope. Mr. Koehler's work in identifying wood used in the Lindbergh kidnaping ladder was greatly responsible for Hauptmann's conviction.

One of the most valuable researches undertaken by the Laboratory is that into wood preservation. The effectiveness of preservatives is tested and then checked by thorough trials under actual service conditions. The picture at the right shows fence posts being synthetically decayed with zinc chloride.

Comeback!

An essential service performed by wood in commerce and daily life is in the form of containers for commodity shipments. The work of the Forest Products Laboratory in improving the strength of boxes and crates has led to savings to the consuming public, in fright handling charges, losses, and damage to goods, amounting to millions of dollars yearly. Shown at the right is a box testing drum which, when revolved, picks up and drops a box or crate in every conceivable manner to test strength and find construction faults.

this purpose presents a broad responsibility for research.

Dedicated to this research is the Forest Products Laboratory, at Madison, Wisconsin. Hundreds of thousands of mechanical tests have been made at the laboratory to determine the strength characteristics of more than 160 native woods, for the purpose of adapting wod more effectively and satisfactorily to its various uses.

Tests of full sized timbers have demonstrated in quantitative fashion the influence of common defects, such as knots and checks, on strength, with the result that structural designers have been supplied with more efficient working-stress values, building codes are being modernized, and timbers are bought and sold on the basis of strength grades, by which they can be rationally and economically selected for their intended loadings.

The pictures on this page show but a few of the many ways in which the Forests Products Laboratory is learning things about wood, things that will benefit all of America.

At the left experts are weighing and measuring green wood specimens so shrinkage data can be determined when the wood dries. Uncontrolled shrinkage causes checks and splits, cupping and warping, honey-combing and casehardening. Above: One of the two experimental prefabricated houses built at the Laboratory, on which extensive studies centering on structural problems have been made.

Ice Without Ice Is The Latest Trick

THIS new machine, demonstrated recently at the Detroit Auto Show, produces "Iceolite," a surface for ice-skating in any season without refrigeration. The girls watching workmen operate the machine are from the skating ballet which performed on the new surface and found it a worthy substitute for ice. The machine, if taken up, may find us all cutting "figure-eights" during the hottest dog days of the summer months.

Page Mr. Chamberlain!

BRITAIN'S prime minister would undoubtedly be fascinated by this latest rainy-day gadget, which is called the "Umbrubber." Made to protect the user against sudden showers that might spring up, the device has a special handle of plastic which contains a pair of light-weight rubbers. In the event that the user is one of those people who won't wear rubbers, no matter what the weather, the handle can be used as a container for cigars, cigarettes, candy, or cough medicine.

Maybe You Just Have To Get Used To It

NO, THE ladies aren't going to a masquerade. They are just demonstrating what the glasses of tomorrow may look like. New York fashion experts claim that glasses can be a beauty and fashion aid if properly accented with clothes, hats, coiffure and make-up. We're a mechanix magazine and not supposed to know much about these things, but if the girl of tomorrow is going to wear these goggles, we are all for the girl of today.

You're RIGHT—That's WRONG!

Here are 25 statements, some of them true, others false. The trick is to separate the *true* statements from the *false* ones—and it isn't as easy as it looks! Use a pencil or pen and check the correct box under each statement and see how you make out!

After you've given yourself the test, try it out on friends and other members of the family and compare scores. They'll enjoy it and so will you.

Are you ready? Let's go!

1. The term "U-boat" is taken from the German word "Unterseeboote."
   True ☐ False ☐

2. World records prove that a two man bobsled is a great deal faster than a four man bobsled.
   True ☐ False ☐

3. A meteorologist is a person who makes a business of identifying and collecting meteorites.
   True ☐ False ☐

4. If, when eating dinner, you said: "Pass the hydrogen oxide," you would expect to receive the water pitcher
   True ☐ False ☐

5. A new born baby has more bones than a full-grown adult.
   True ☐ False ☐

6. It is absolutely impossible to train homing pigeons to forget their natural instincts and fly at night.
   True ☐ False ☐

7. A paravane is a device used by navies to cut mine wires and other underwater obstructions.
   True ☐ False ☐

8. A thermal is a small thermos bottle.
   True ☐ False ☐

9. Artificial wool from cow's milk is now being manufactured on a large scale, in Italy.
   True ☐ False ☐

10. Silicosis is the condition that is brought about when a person inhales too much laughing gas.
    True ☐ False ☐

11. When traveling under water, submarines are driven by electric motors.
    True ☐ False ☐

12. We think of the airplane as a comparatively recent invention, but Leonardo da Vinci designed a flying machine way back in the 15th century!
    True ☐ False ☐

13. The milky fluid obtained from a rubber tree is known as chicle.
    True ☐ False ☐

14. Samuel Finley Breese Morse, as well as inventing the telegraph, was one of the founders and the first president of the National Academy of Design.
    True ☐ False ☐

15. The affliction known as "bends" is caused by overeating.
    True ☐ False ☐

16. The eggs of bats make very good eating when properly prepared by a good cook.
    True ☐ False ☐

17. Pitchblende ore yields the very valuable element of radium.
    True ☐ False ☐

18. Automobiles in most European countries are taxed according to their horsepower rather than their weight.
    True ☐ False ☐

19. Your house gas meter registers the amount of gas you use in terms of poundage.
    True ☐ False ☐

20. An airplane pilot would rather take off with the wind than into it.
    True ☐ False ☐

21. The largest planet in the solar system is Jupiter.
    True ☐ False ☐

22. The duck-billed platypus is a small bird found off the southeastern coast of the United States.
    True ☐ False ☐

23. The starboard is the left side of a boat.
    True ☐ False ☐

24. "Sand hogs" is the name given to tunnel and caisson workers.
    True ☐ False ☐

25. A drill press is used to press soldiers' trousers.
    True ☐ False ☐

WHAT'S YOUR SCORE?

To get your score, simply give yourself 4 points for every question you answer correctly and total the result. If your mark is above 90, you are exceptional; if it is between 80 and 90, you deserve high praise; if it's between 70 and 80, you're good; between 60 and 70, fair; and below 60—well, try again next month!

Answers will be found on page 125

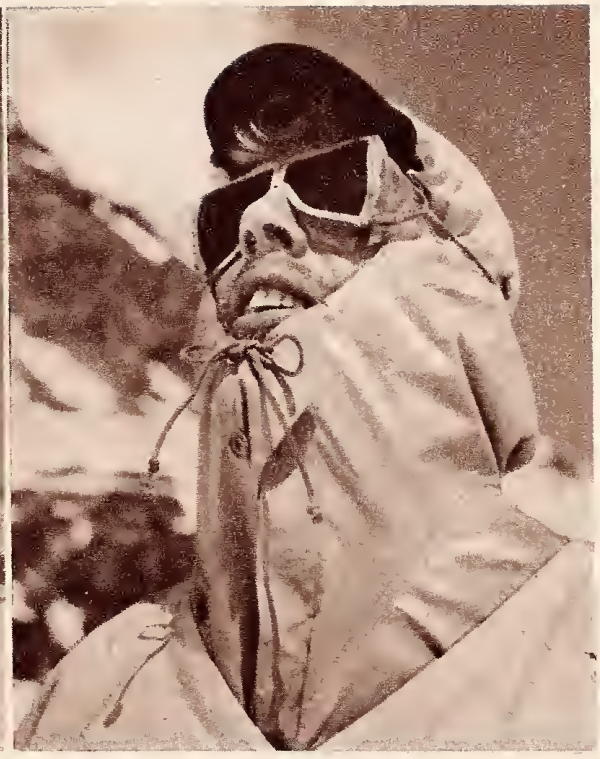

Skiing Like Flying With Bat-Like Cape

LOOKING more like a bat than a man, this skier is demonstrating the sail-cape. It serves alternately as a sail and as a brake, and in the former capacity is said to give the user the same sensation as a flight through space. To protect the skier from windburn, a hood envelops his entire head, leaving free only the mouth and nose.

"Vacuum Cleaner" Unloads Bulk Grain

FINDING the usual methods of unloading grain too slow, a brewery now uses air pressure to do the job. An operator is shown handling the nozzle of the metal hose like a vacuum cleaner. Below: The gentleman is pointing to a small glass window at the blower valve through which can be seen the loose malt being blown into the brewery's storage bin.

It Would Make A Swell Fan, Too

IT LOOKS like a new-fangled kind of windmill, or at least a trick water turbine—but don't let appearances fool you. It's an unusual aerial designed for W6XAO, the only television transmitting station in Los Angeles. The aerial is 60 feet high, and the paddle-like elements are intended to produce television pictures with better definition than former aerials have given. Made of duraluminum, it is being inspected by Harry Lubcke, its designer, and Thomas Lee, who owns the station.

There's Still Room For The Fireman

WARTIME scarcity of gasoline, or "petrol" if you're English, has caused Britain's inventors to work overtime perfecting cars which will run on other substances. This car, seen in Worcester has been adopted to run on anthracite. The car is first started with petrol, and after about two minutes running is switched over to the anthracite. Consumption, it is claimed, is about 120 miles to a bag of anthracite.

Tillie The Toiler Should Try This One

SEEMINGLY still pleased with it, Mrs. Charles Fortier, of Milwaukee, inspects the odd-looking machine she used to pound back in the days when she was the world's first typist. Daughter of C. Latham Sholes, the man who invented the typewriter, Mrs. Fortier was the guest of the New York League of Business and Professional Women at their celebration of 100 years of woman's progress, recently.

Riding The FROZEN FREIGHT

A powerful Diesel-engine tractor hauls a lumber "train" in northern Manitoba. A water tank is pulled behind tractor to "ice the tracks" when going is tough. Below: Off on a long trip!

by James Montagnes

THE time was midnight, the temperature was 30 below zero, and the icy trail across the lake was covered with a thin carpet of finely powdered snow.

The noisy grumble of the tractor reverberated through the icy stillness, its headlights piercing far into the night. Behind the blazing lights sat the tractor driver, his eyes glued to the trail ahead, his mittened fingers clutched tightly around the wheel. Behind him trailed three heavily loaded sleds. Mining machinery, lumber, and provisions, valued at tens of thousands of dollars, was being hauled by the powerful tractor to a mining camp nearly 200 miles north of Hudson. Behind the three sleds was a box-like sled, the caboose of the tractor train. Inside were three sleeping men, a cook and two spare drivers. The whole outfit was moving at three miles an hour across the ice of Lac Seul.

Snow drifts, slush pools below the surface, and sub-zero temperatures are but a few of the constant dangers that confront the men who drive the northern Canadian tractor trains.

Off to the mines! Notice the propelled cabin-sled being hauled on the fourth sled of the train. Below: "A heavy drag." Those transformers that are being carried weigh plenty!

They were on schedule, making good time considering the load, when for no reason the headlights went out. The driver tried to light them, but couldn't. The lights remained out. Only the stars lighted the white expanse of frozen lake and, in the distance, a tree-clad island. Lighting an emergency oil lamp carried in the cab, he went on, more slowly, his eyes peering ahead more cautiously.

Suddenly there was a gurgling, bubbling noise directly below the tractor. It sagged a little, settled deeper into the snow on top of the ice. The driver had had similar experiences; he knew what had happened. With the first sound from below, he let out a yell, to waken the sleeping crew in the caboose. Then he jumped out of his cab, a second too late. As the tractor settled more quickly, his foot caught in the tractor belt. Tugging and pulling, straining and yelling, he loosened it a little, as the tractor settled more rapidly in the water-flooded snow. The headlights were already under water when the driver finally wrenched his foot free and threw himself into the snow. Down went the tractor and the heavily loaded sleds with it, as the ice crack widened and finally gave way.

In the caboose that first yell had wakened the three men. They always slept with one

The upper picture shows five sleighs and a caboose being hauled across a floating bridge over the Manowan River, near Sanmaur, Quebec. Directly above, a tractor train is passing the Hudson Bay Company's post on its way to Val D'or gold mines.

ear open, and could hear the faintest noises of trouble even though the door of the caboose was closed and a stove burned to keep the cabin warm. With no time to grab clothes, the three rushed for the door. The first two jumped out, landed safely. The last man was nearly too late—he got out of the caboose, but he couldn't move.

The three men in the caboose had come out in their underwear, the driver's clothes were soaked from his struggle to free his foot from the sinking tractor. It was thirty below zero. The nearest island was a mile away. They had no food, no dry clothes. They managed to salvage a floating can of kerosene from the wreck, then hurried to the island, dragging the injured man between them. On the island they made a fire with their kerosene and the emergency matches carried by the driver. They kept a roaring fire going after making camp in the shelter of a clump of trees. They kept warm despite the temperature and their lack of clothes. But they didn't dare fall asleep.

Next morning they planned how to get the injured man to Hudson. They were on a traveled route; planes flew over it, tractor trains came by at infrequent intervals. Then they heard a plane. Out on the ice the three men dashed in their underwear. A thousand feet up was a plane, heading north. They danced on the ice. They waved their arms and shouted.

The man in the plane saw them. The plane dipped, wheeled, and came down, landing on its skis. In it was a doctor, northward bound. He attended the injured man, and the pilot took aboard the four men and flew them south to Hudson. The men had been saved from

[*Continued on page* 122]

Land Looks Good To Seaplane With Skid

SEAPLANES need no longer be confined to water when landing or taking off, thanks to this new type of pontoon with "skid" arrangement. The pontoons are equipped with both wheels and an unusual "skid" in front. Made of strong but flexible metal, the skids keep the plane from tipping over.

The Cows Like It, Too

BRITAIN, expecting every girl to do her duty, is training an army of city girls to make themselves useful on the farm. Before being turned loose on defenseless cows, the girls must first practice on dummies.

Looks Like A Jitterbug

BUT she's not. She is testing her side vision with the aid of a waggling forefinger and a perimeter. The latter is the newest scientific device to measure the entire field of vision. A normal person should be able to see a moving object at a 90 degree angle while looking straight ahead.

Try It On Your Tennis Court

THE world's largest steamroller, weighing 20 tons, is being used in the construction of an English reservoir. The wheels of ordinary rollers sank into the soft soil of the reservoir wall, so this giant, with rear wheels 12 feet in diameter, was designed to overcome the trouble.

Lone Sailor Foils Davy Jones

GUY AVERY, 35-year-old Tampa, Fla., adventurer, was hauled aboard the Italian freighter *Belvedere* 550 miles west of Gibraltar when his 18-foot yawl, *Miss Tampa*, in which he was making an Atlantic crossing alone, was on the point of sinking. Avery, who had been at sea almost five months, was in a dazed condition and so weak from hunger he could hardly stand.

Smokes Without Glow

A HOME-MADE aluminum shield with vent holes enables this English air raid worker to enjoy his cigarette and obey the "Lights Out!" warnings.

Byrd Hasn't The Only Snow Cruiser

A NORTHERN Wisconsin winter is a mighty cold proposition, and the sub-zero temperatures often mean that baby has to stay indoors all day. This Tomahawk, Wisconsin, mother solved the problem nicely with an anti-blizzard sedan made of plywood, and equipped with windows and tiny port holes for proper ventilation.

It Takes The Dutch To Beat The Dutch!

THE Dutch army recently held unusual maneuvers —they tried to penetrate their own flooded frontier territory with tanks and armored cars. As the picture below shows, the result was complete failure, with cars and tanks bogged down in the muddy waters.

Airs, Kills, And Feeds!

THAT innocent looking ventilator at the top of the fish store's window isn't all it seems to be, as thousands of flies have found out. The flies, attracted by the light above the ventilator, are electrocuted by an electrified wire grill, then drop into a tank of goldfish where they are really appreciated.

WANT TO BUY A

Left: A healthy looking rattler, caught with the long-handled wooden tongs, is about to be deposited in a gunny sack which is hung in the branches of a shrub. Above: Joe King forces the snake's jaws apart, preparatory to the ticklish operation of removing the creature's deadly fangs.

by Harry Pederson

MAN chooses many strange ways to earn a living, but few are more precarious than the profession William King of Brownsville, Texas, has been at for thirty-five years —catching and marketing live rattlesnakes!

Of all the creatures that inhabit the United States, perhaps the most dangerous and dreaded is the rattlesnake. With one lightning-swift stroke of his gray head he can inject enough venom into a man to kill him in a few hours. He is so beautifully camouflaged by nature that it is almost impossible to see him when he is lying still, and although he usually sounds his warning before he strikes, his victims often do not see him until it is too late to escape.

Thirty-five years ago, William King decided there was money to be made if he could provide zoos and snake acts and circuses with rattlesnakes to show their customers. Today he is known to the show world as "Snake" King, and the King establishment at Brownsville is one of the largest commercial reptile farms in the world.

Catching snakes is no job for amateurs. The trappers who work for King have learned their jobs thoroughly—they *have* to if they want to stay alive—and they will teach their methods to their children.

For instance, there is Fructoso Cortez who has been catching snakes for King for more than twenty years. He can spot good snake country as he passes through it in a car, and he can tell by a snake's trail in the dust how large it is, what species, which way it was going, and whether it was frightened or merely traveling in search of food.

The equipment he uses is very simple. If he is working near camp he often employs a pair of long-handled wooden tongs with padded jaws to grab the snake just ahead of

RATTLESNAKE?

Most of us can get along perfectly well without them, but in case we couldn't, we'd be shopping for diamond-backs at Bill King's "snakery" in Brownsville, Texas.

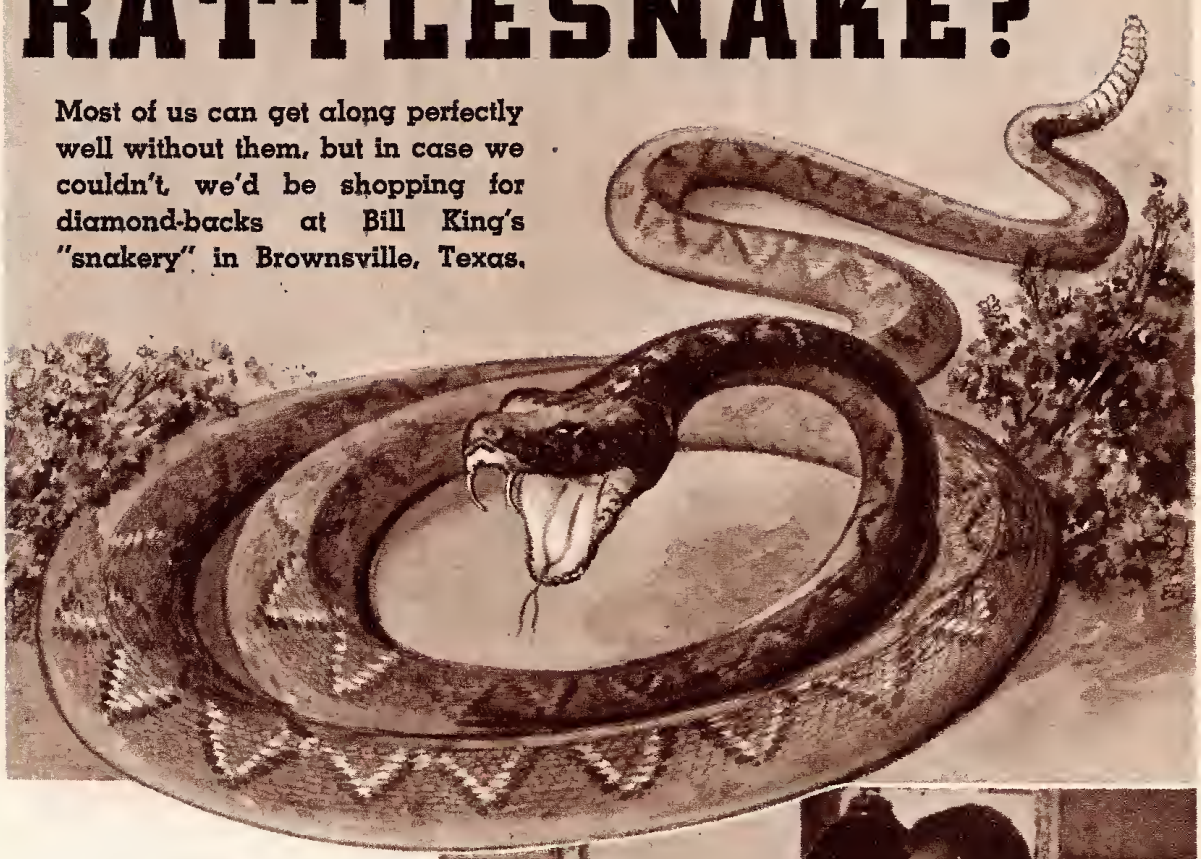

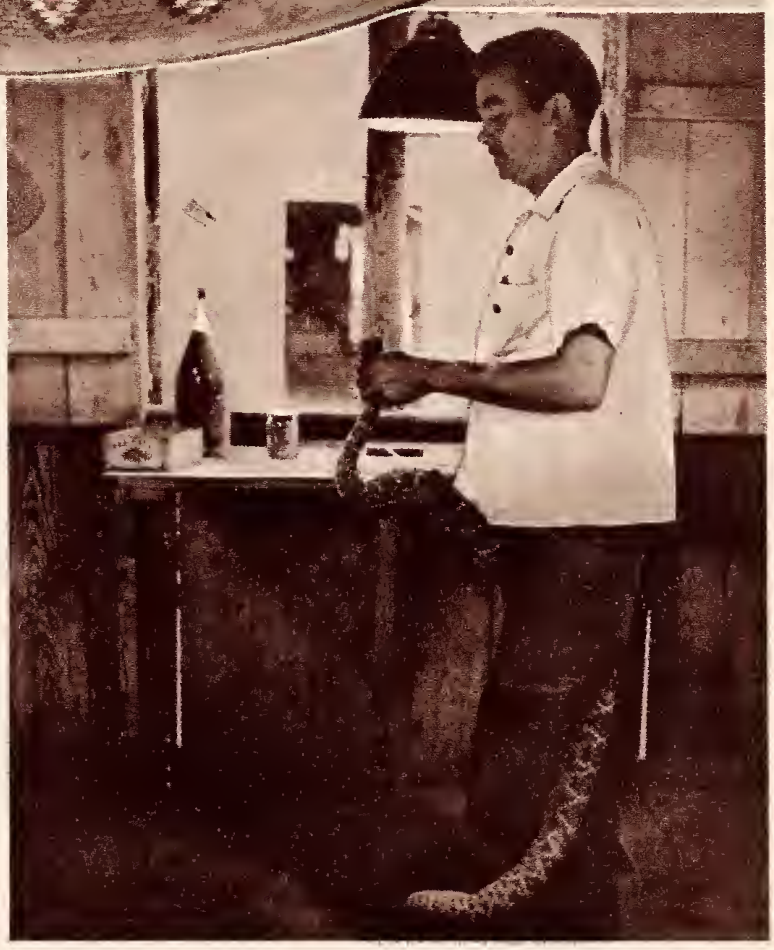

Joe King is about to remove the fangs from this rattler. He clamps its body with his legs to keep it from lashing about.

its middle. Or he may use a stick two-thirds the length of a billiard cue with a slip noose at the end; or perhaps nothing more than a forked stick with which he holds the reptile until he can grab it and flip it deftly into his snake bag.

It all looks absurdly simple, but it is so only because he knows his job. He is taking chances with his life and he knows it. The forefinger of his left hand is only a stump, the result of a little accident. He was a trifle careless one day and a snake caught him in the finger-tip. He was twenty miles from a doctor. He knew of nothing to do but what he did to save his life. Before the venom could get into his blood stream he placed the finger against a tree and with his machete whacked it off.

Right: Fructoso Cortez uses long tongs to grab a rattler that has been hiding under a bush. Above: Rattlesnake fangs, showing curvature and venom hole.

In good country a snake catcher can bag three or four rattlers a day averaging six or eight pounds each. The largest one ever brought to the King snake farm weighed twenty-eight pounds and measured seven and a half feet, and while snake catchers tell fabulous stories of the huge snakes they have seen, "Snake" King has a standing offer of one hundred dollars a foot for any rattler measuring ten feet or more. No one has ever collected.

When the snakes are brought to the snake farm they are weighed and paid for by the pound, at a rate varying between twenty and thirty cents. King's son, Joe, usually handles them now because his father has taken to training lions. He scoops them unceremoniously out of the box or bag in which they came and tosses them into dens with double mesh fronts.

A few days later after the snakes have become used to their surroundings and have fully recovered from any injuries they may have received at the hands of the snake catchers, he removes their fangs and drains their venom sacs—probably one of the most dangerous jobs in the world.

It is all very easy when you see it done. He pulls a six-foot rattler from its box and using only his hands and a metal-pronged snake stick carries it to a bench at one end of the room. There he puts it down for a moment, and suddenly with a cat-like movement he has grabbed it just back of its head. Pressure of his fingers at the base of its jaws causes the mouth to open and expose the long curved fangs with syrupy venom dripping from their hollow points.

When it strikes, a rattlesnake lashes forward with its upper coils, and at the end of the stroke its head snaps downward like the cracker on a whip. It is this last movement that sinks the fangs into the victim. And since the hollow bases of the fangs are upon the venom sacs the sudden pressure of the blow forces venom through them into the wound.

To remove all of the venom Joe pushes against the venom sacs in the roof of the snake's mouth with a small blunt instrument. Adult rattlesnakes carry about two hundred millegrams of venom, and a lethal dose for a man is calculated to be one hundred fifty millegrams. The extracted venom is the color and consistency of corn syrup. When it has been dried to crystal form, the Kings sell it to chemical laboratories and research institutions where it is used in the preparation of anti-venom, a substance employed by doctors to fight the effects of rattlesnake bite.

Joe King will not reveal the exact method he uses for extracting the fangs because that is a King secret. But he does it very quickly with a scalpel and a pair of tweezers while he holds the deadly jaws apart with one hand.

[*Continued on page* 126]

Bug Catching Method Like Old Style Snipe Hunt

EMPLOYING light bulbs as their only weapons, scientists at the University of Minnesota are fighting an experimental war against insect hordes to make America safe for its farm crops.

Along one battle front on the farm campus, a row of ten bug traps has been installed. These look like open air birdhouses with round, sloping roofs and deep, dark cellars. An electric light bulb is installed in the center of each house, and metal fins radiate outward. Attracted at night by the glowing bulb or mercury vapor light, the bug zooms headlong into the trap and is deflected into the cellar where a fumigant ends its troubles. In the cellar floor is a hinged trap door through which the bug jar can be removed hourly and contents counted, sorted and classified.

Each trap contains a different colored light, and by maintaining accurate counts, warring scientists determine which lights are most effective, what sex and species of bug flies at certain hours, and how their period of flight compares with air and soil temperatures.

To measure the flow of current to the lights, special meters are used, and lights are turned off at a predetermined hour by means of a clock-like gadget.

[*Continued on page* 126]

Not How Fast But How Far

ACCURATE as a tape is the apparatus at right, known as a survey footometer, which registers in feet the distance traveled by an automobile. It consists of an indicating instrument which is clamped to the car door and is driven direct by a flexible shaft connected with the bicycle wheel which is fastened to the running board. Accuracy is secured by having a minimum of air pressure in the tire, thus eliminating wheel bounces.

EFFICIENT NEGATIVE FILE

Above: The file print is projected as shown. Negatives are placed on enlarging paper, emulsion to emulsion and covered with a sheet of glass to hold them in place. Negatives can be dodged. Left: Showing the file print.

by Murray Knowlton

USUAL methods of recording the popular 2¼x2¼ size negatives tend toward complicated and involved procedure, but the following system works out with a minimum of "fuss," yet fills all essential requirements of such a record.

In effect, six of the square negatives are printed together on 5x7 paper and filed. Subject headings, film numbers and whatever additional data desired, is written directly in a space provided for that purpose. To find a particular negative it is only necessary to thumb through the file for the subject heading and refer to the number of the corresponding film file. Negatives are not pawed over every time a particular one is wanted. A complete record of every photograph taken is instantly available.

Although the details apply to the 2¼x2¼ negative size, there is no reason why they cannot be adapted to other sizes, including 35 mm.

As three negatives in a strip just fill the 7-inch length of the record print, whenever possible a roll of film is cut into four strips of three negatives each. In cases where a variety of subjects are one roll the individual negatives can be cut apart and rearranged with only a slight amount of additional work.

Two of the film strips, six negatives in all, are placed in contact with the paper and printed, either by contact or with light from a projection enlarger. The latter method has a few advantages. The film strips are easier to arrange. Individual negatives can be dodged or "burned in" if they are under or over exposed.

By either method the blank white space for recording data on the multiple print is made by inserting paper cut to the desired size between the print and the light source.

When the record print is finished and dried any data is written in the space provided, plus a file number. This file number corresponds to an identical number on the negatives, whether they are put away in envelopes, book files, or any other filing device.

A record of a full role of 12 negatives can be made in the time it requires to make two contact prints. A check on every negative in the system is instantly available. Regulation file drawers will hold the records or they can be stored in suitable containers.

WATER DROP REFLECTIONS

A DROP of water, performing the function of a lens, will reflect an illuminated image provided there is an appropriate adjustment of both subject and camera in relation to the water drop. The illustrated exposure set-up tells the whole story. The surface upon which the water drops are spilled is horizontally placed in order to achieve drops as round as possible, the illuminated subject is bent over the surface, and the camera, equipped with ground glass for careful focusing and arrangement, tilted at the required angle to provide the reflections.

Although any similar surface may be used, the water drop support employed in making the picture shown was a chrominum-plated ferrotyping tin, the subject being lighted on one side by spotlight, on the other by diffused flood-lighting. The illumination should be kept away from the reflecting surface.

Some distortion is, of course, unavoidable, and the reflections will be inverted in the same way as a photographic lens inverts the image it receives. For this reason, the finished photo is reproduced with the reflected head upside down so that the water-drop reflections may be seen right side up.

Above: The model is posed over the tray while the photo is taken of the reflection only. Finished print is below.

Cardboard Sandwich Dries Print

A SIMPLE photographic print drier consists of a pile of corrugated cardboard pieces, with the prints sandwiched between. The cardboard should be somewhat larger than the largest print to be handled; the corrugations should all run the same way.

Prints are blotted to remove excess water, before placing between cardboards. They dry perfectly flat. When the pile is placed in front of an electric fan so that air is forced through the corrugations, they can be dried in a surprisingly short time. Use clean cardboards free of wavy surfaces that might affect the print.

How to Build SECTION



PICK YOUR PROJECT

Illustrated on this page are some of the things you can build from the plans and instructions given in this section. Select the one or ones that appeal to you, turn to page indicated.

Marine Lamp and Porthole. Make them this winter for your summer cottage. Page 102.

Knock-Down Portable Shelf. Ideal one-evening project. Turn to page 105.

Antelope Ornament. Decorative walnut statuette for craftsmen. Page 104.

Oil Drum Stoves. More heat from less fuel with these ingenious ideas. Also complete oil drum heating units. Page 98.

Modernistic End Table. Handsome, useful and easy to build. Plans on page 99.

Make Your Own Sailboat Fittings from solid brass. Patterns and instructions are on page 100.

Carve Yourself a "RUBAIYAT"

Fast, Class "A" Model Racing Sloop

by E. H. Vogelpohl

Rubaiyat!
An idle hour, a tangy breeze
And thee
Upon the briny sea
Is paradise, indeed,
For salty lads like me.
OHMY KYACK.
(apologies, Omar)

NO SPECIAL skill or experience in wood carving is necessary to create a very fine duplicate of "Rubaiyat" but patience and infinite care are virtues which will reflect themselves in exquisite workmanship. A ten-dollar bill will cover the cost of lumber, fabric, paint and hardware, but when finished you will have something worth ten times more.

The bread-and-butter or laminated type of construction was chosen for "Rubaiyat" because of the comparative rapidity with which a seaworthy model may be constructed by this method. Too, the weight of the finished model with sides as thick as ¼-in. will be only a few ounces heavier than a planked model of the same size. This bit of excessive weight is not as great a handicap in racing

Her mast stands six feet high, and she spreads a good bit of sail, but ten pounds of lead in her keel give the necessary stability.

After marking off the station with belt lines around each plank, the water lines are laid out on the lifts by means of a batten bent around pins stuck in the wood at the correct spots. The two halves of each lift are screw fastened together for jigsawing.

Jigsawing the lifts, two at a time. Cuts must be made *outside* the pencil lines, which should be left visible at all times. After cutting, the halves of each lift are joined at the ends by marine or casein glue and clamped securely until dry.

Next step. Completed lifts are laid sandwich fashion, very carefully on top of one another and glued together. Clamps hold them tightly while adhesive is setting.

After the outside has been planed to shape the inside of the hull is gouged out until the wood is approximately ¼-in. thick all over.

The completed hull, with deck at top. Final smoothing down is done by careful sanding, checking the contours with templates at frequent intervals.

as may be expected since, more often than not, races are won by the skill with which a skipper handles his ship.

The first step is to get forty-two feet of clear, straight, white pine boards, one inch thick and 4¾-in. wide. These are all standard dimensions, the forty-two feet being three standard, fourteen-foot lengths. Have the lumber finished nice and smooth on both broad surfaces and sand one long edge straight and smooth.

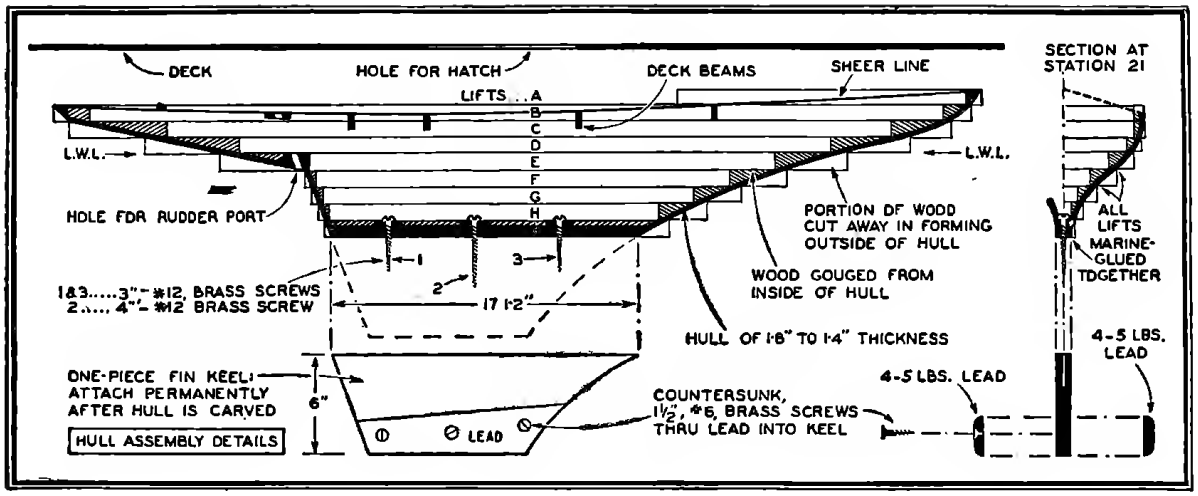

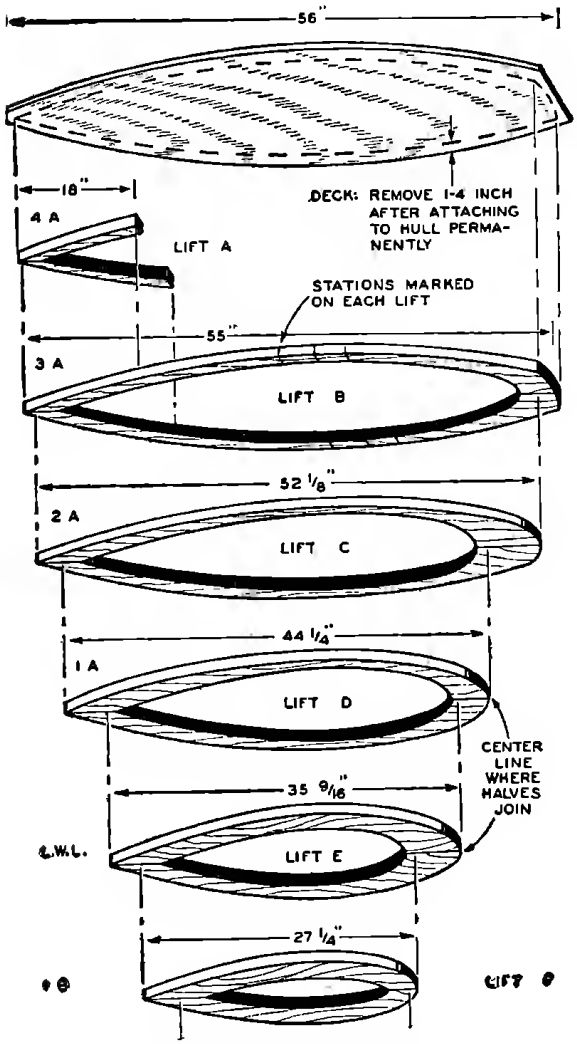

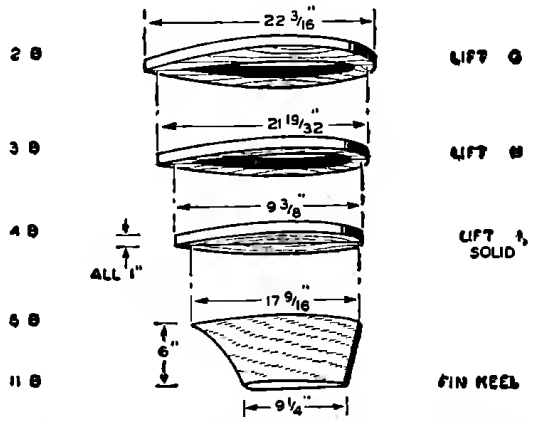

Measurements of the "bread and butter" lifts and order in which they are sandwiched are shown above. This method of construction gives a strong, true hull and is easiest for the inexperienced modeler.

Then cut up lumber into lengths corresponding to the lengths of the various lifts or laminations plus one inch. That extra inch provides for a half-inch margin at either end. Remember, there are to be two pieces of each size; one for the port, the other for the starboard side of the ship.

Carefully mark off 3-in. sections along the dressed, long edge of each plank and draw a belt line completely around the piece at each point. These belt lines represent the stations as shown in the plan and should be numbered correspondingly. Photo portrays this operation. Accuracy is essential in getting all of the lines equally spaced and square with the finished edge since they are guide lines necessary when gluing the half breadths together, and when placing each full-width lift upon the other in correct position.

Starting with lift "B," with the finished edge as the center line, plot the graph of the water lines on each corresponding lift (see figure 2) and draw in the sweeping curve by means of a batten bent around pins stuck into the plank at the offset points at each station. This operation is being performed in photo 2. The offset points are obtained by measuring the distance from the center of the boat to the

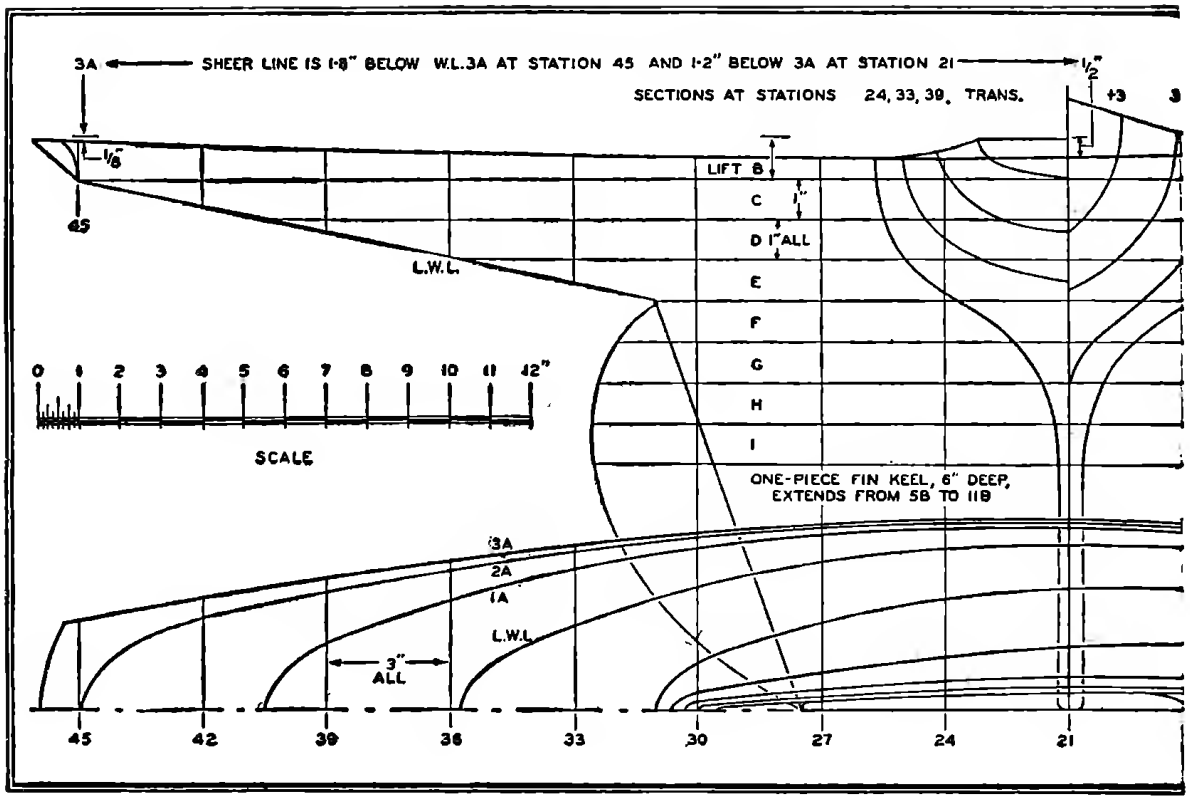

particular water line at each station. For this detail consult the plans above.

Let us assume that you have the water line 3A drawn on lift B. Then, on the same plank, draw the water line immediately below it, in this case 2A. Use a dash line to make the distinction obvious. Next, and still on the same plank, draw another curve representing the inside surface of the hull. This curve is not critical since the precision job of gouging out the hull later would nullify any painstaking care with it. However, do not let this third line come closer than 3/8-in. to the dash line anywhere. As you can see in the photos its distance from the dash line grows greater at each end to allow for a little more thickness of hull at the points where the model will receive the most bumps.

Place this plotted lift on the other half of lift B, line up the stations *exactly* and temporarily screw-fasten the halves together with five, 2-in. No. 2 screws preparatory to cutting them to shape.

Repeat this cycle of operations and details with each pair of lifts and you will be ready to cut out the laminations on a band saw, two at a time. Do not saw directly on the lines but rather let the blade just "kiss" them lightly. And remember . . . to lose the line at any point is a capital crime. No cutting is to be done along the dash line; it being merely a necessary construction line for establishing the third, or inside line. It will also aid in assembling the finished lifts, later. Note please that lift "I," the smallest one, is *solid;* not cut out in the center.

After sawing, the bow ends of the lifts will be very narrow and thin. Take great care not to damage them in handling since a nick or a dent would necessitate the use of plastic wood or result in the loss of that beautiful flow of line so carefully worked out in the profile.

Each pair of halves may now be joined with marine glue or casein glue as second choice. First separate a pair of halves, then replace screws at each end of both halves so that they project beyond both surfaces. Proceed by sanding, touching surfaces lightly, apply marine glue, bring both halves together so that the ends and the midship station line, number 21, line up exactly. Two small clamps at each end, one on top the other at bottom, bear on the projecting ends of screws while glue is drying. Two additional large clamps, one at each extremity, provide the even pressure necessary for a good joint. Place little wooden wedges between the lift and the large clamps to keep the latter from slipping and to prevent clamps from biting into the lift. Allow plenty of time for the glue to dry and set before removing clamps.

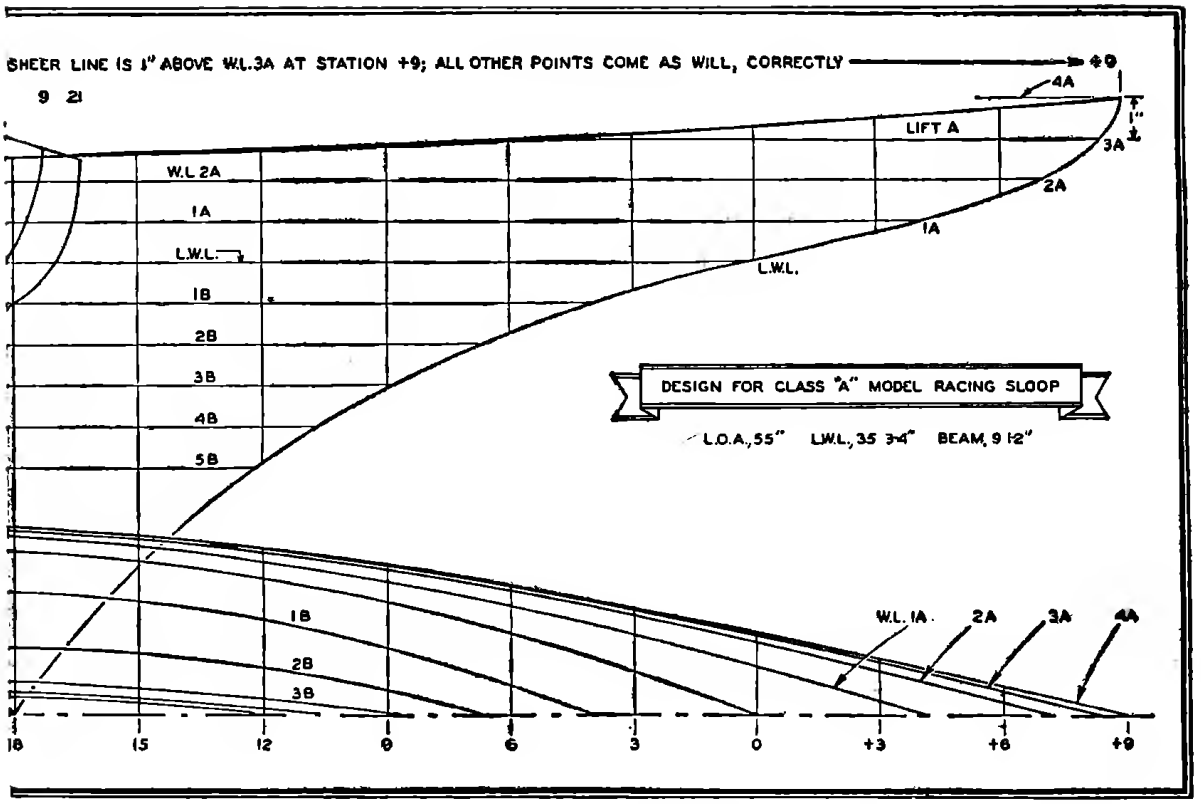

Sand and spread marine glue on the touching surfaces of the various lifts which are then placed one upon the other in their *precise,* relative positions to form the rough mass of hull. While doing this you will understand vividly why this technique was dubbed the "bread-and-butter" method. Line up center lines and check the station lines for perfect alignment. Watch out that the lifts do not slip when clamps are applied. If your clamps are not large enough to grasp all of the lifts at once, glue up the five bottom lifts first and when glue is dry attach the remaining four upper lifts to this assembly as illustrated.

Now the hull is ready for carving. Secure it fore and aft with cleats attached to the work bench. A good draw knife is the handiest tool for taking off the greater excess of wood from the outside of hull. Carve in long sweeping strokes until the joints of the lifts are just reached. Then *stop.* After both sides of the entire hull have been roughed out in the above manner carefully proceed to finish with a plane and No. 2 sandpaper. Patience and care are essentials from now on. Do not cut into the water lines and keep the center line straight. Your sense of touch while sanding will reveal irregularities in streamlining quite as readily as your eye. After one side of the hull has been finished to perfec-

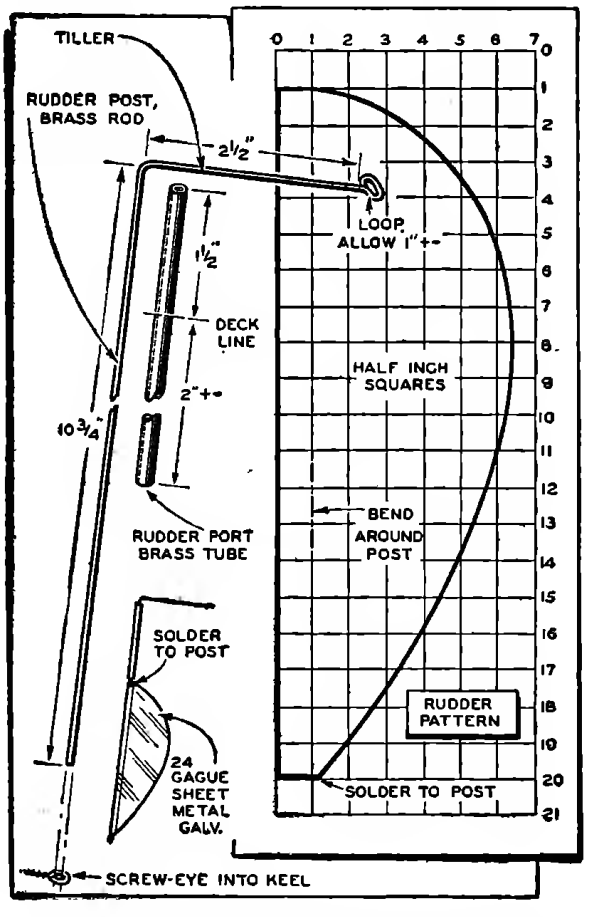

The sheet metal rudder is cut to shape from pattern above, which must be drawn full size. It is soldered to the rudder post, but not until after installation.

tion duplicate the contours at stations on the other side by checking with templates as shown in photo 9; the numbered, station lines are still showing on the top and bottom surfaces of lifts B and I respectively. Use the section lines in the plan (figure 1) as standard patterns for templates. On the lower lifts; the top ones, though, when hull is upside-down in working position; the sections are concave and your carving must be done with gouges of several sizes. Shave carefully, patiently removing each thin curlicue, a little at a time.

Scooping out the inside of the hull is the next step. In our model the thickness will be ¼-in. Rough cutting is done with gouges; finishing with No. 2 sandpaper. Calipers are used to maintain a uniform thickness.

Mark the sheer line on each side of the hull as follows. At station 21 mark off a point ½-in. below the top of lift B and stick a pin into the outside of hull at this point. At station 45 measures down ⅛-in. and stick another pin into hull at that point. Nestle a batten against these pins and bring the forward and up to the tip of the bow. When laying snugly on the side of hull at all points mark a line and you will have a perfect sheer line. Cut away surplus wood to line. Do this on both sides.

Inside finished to your satisfaction, install the deck beams and connecting hatch members, etc. Fasten with glue, pegs and screws (see figures 4 and 7).

Bore the ¼-in. hole for the rudder port through the hull with a brace and bit. Line up the bit both ways with the straight, aft end of the keel so that the job will be true and at the correct angle. Continue hole up to and through the aft deck beam. And later, when ready, through the deck. Flow shellac into the hole in bottom and drive in the port at once. There should be a tight fit to prevent leakage.

Cut profile of the fin keel from an 18x6-in. piece of pine 1-in. thick. Draw water line 5B on the top surface and streamline to this line with bandsaw or plane. Finish with sandpaper and attach to hull with marine glue. Reenforce with three, round head, 3-in. No. 12, brass screws driven in through

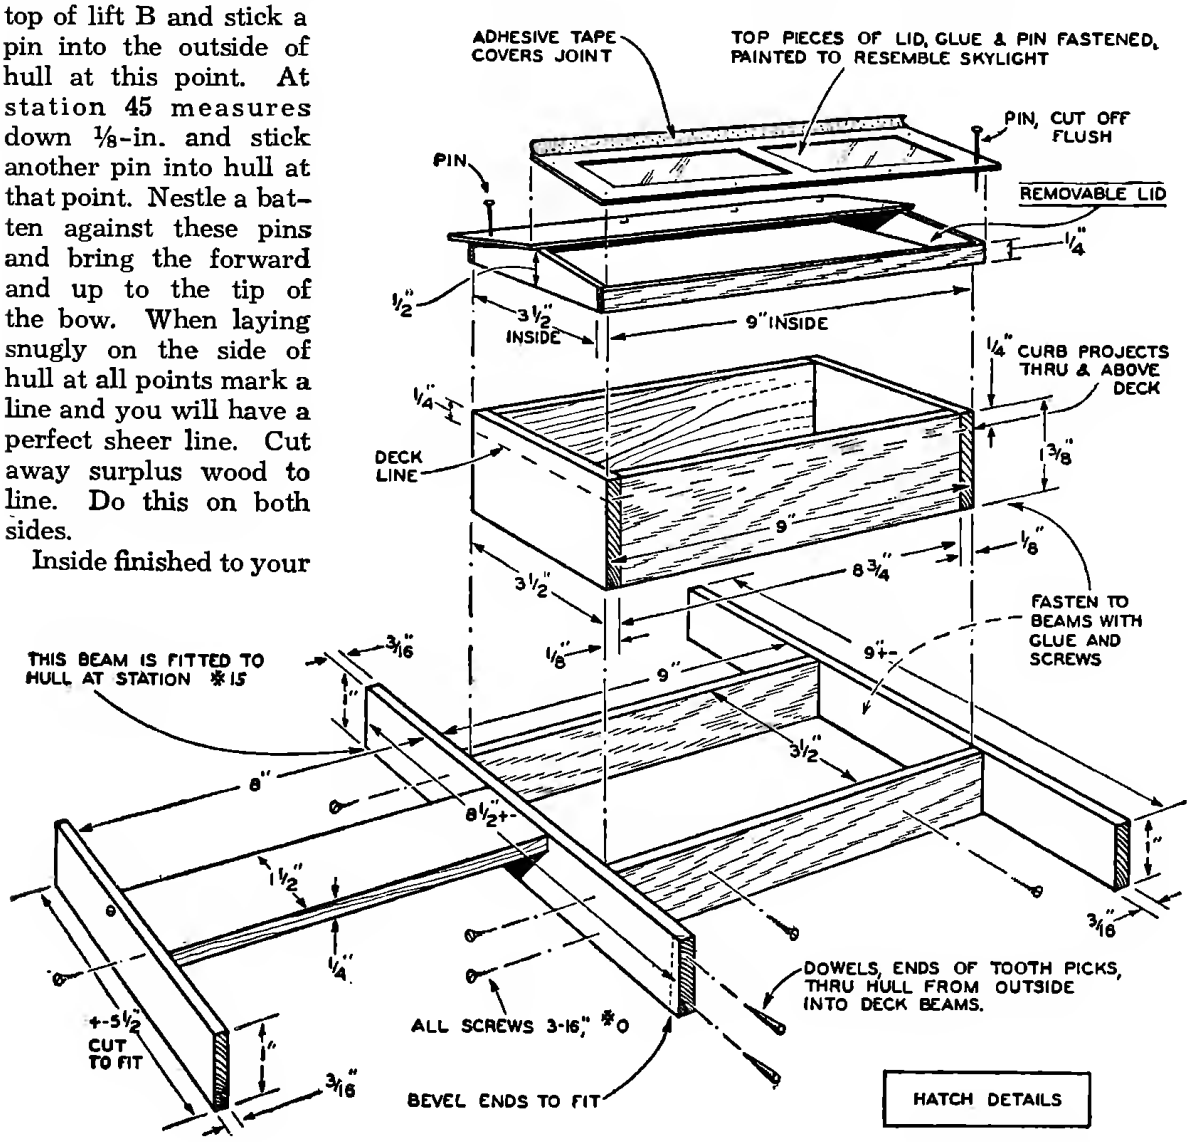

lift "I" from the inside of hull. The center screw may be longer if desired. The articulation between hull and keel should be smooth. No marked change in direction of line should be noticeable. The two units should merge.

The deck is cut from one piece of white pine, 56-in. long, 10-in. wide and ⅛-in. thick. Mark a center line on the piece and impose it upon the hull. Center properly and mark around the sheer line where it touches the deck. Cut out deck piece roughly about ¼-in. outside of this line. Establish the position of the hatch and cut out this portion directly on the line. Before deck can be permanently attached all work on the inside of the hull, including two coats each of shellac and paint, must be done. Deck is glued to hull; held tightly to sheer line by weights resting upon it while glue is drying. When glue is set trim deck nearly to the hull with a plane. Finish flush with a sandpaper stick. Attachment may take place either before or after the outside of hull has been treated to its first undercoat of paint.

In all, the outside of hull is given two coats of good shellac and three of paint, sand lightly between coats. The choice of colors is yours. The deck is spar varnished as is the hatch cover of cigar box wood. Make your spars, sails and rudder while paint is drying. These details are fully explained in the drawings. Remember, however, that the rudder is soldered to the rudder post *after* being installed in boat. Be careful not to destroy the fore and aft balance of the boat when attaching the ten pounds of lead to the keel.

For best sailing there must be a balance between the centers of effort and resistance. Since our center of lateral resistance is a fixed factor in a hull of this type, the placement of the mast is an important factor. Trial and error alone will tell the best position for a particular, individual hull. In the original model the mast was stepped as shown in the sail plan and the little vessel gave a very in-

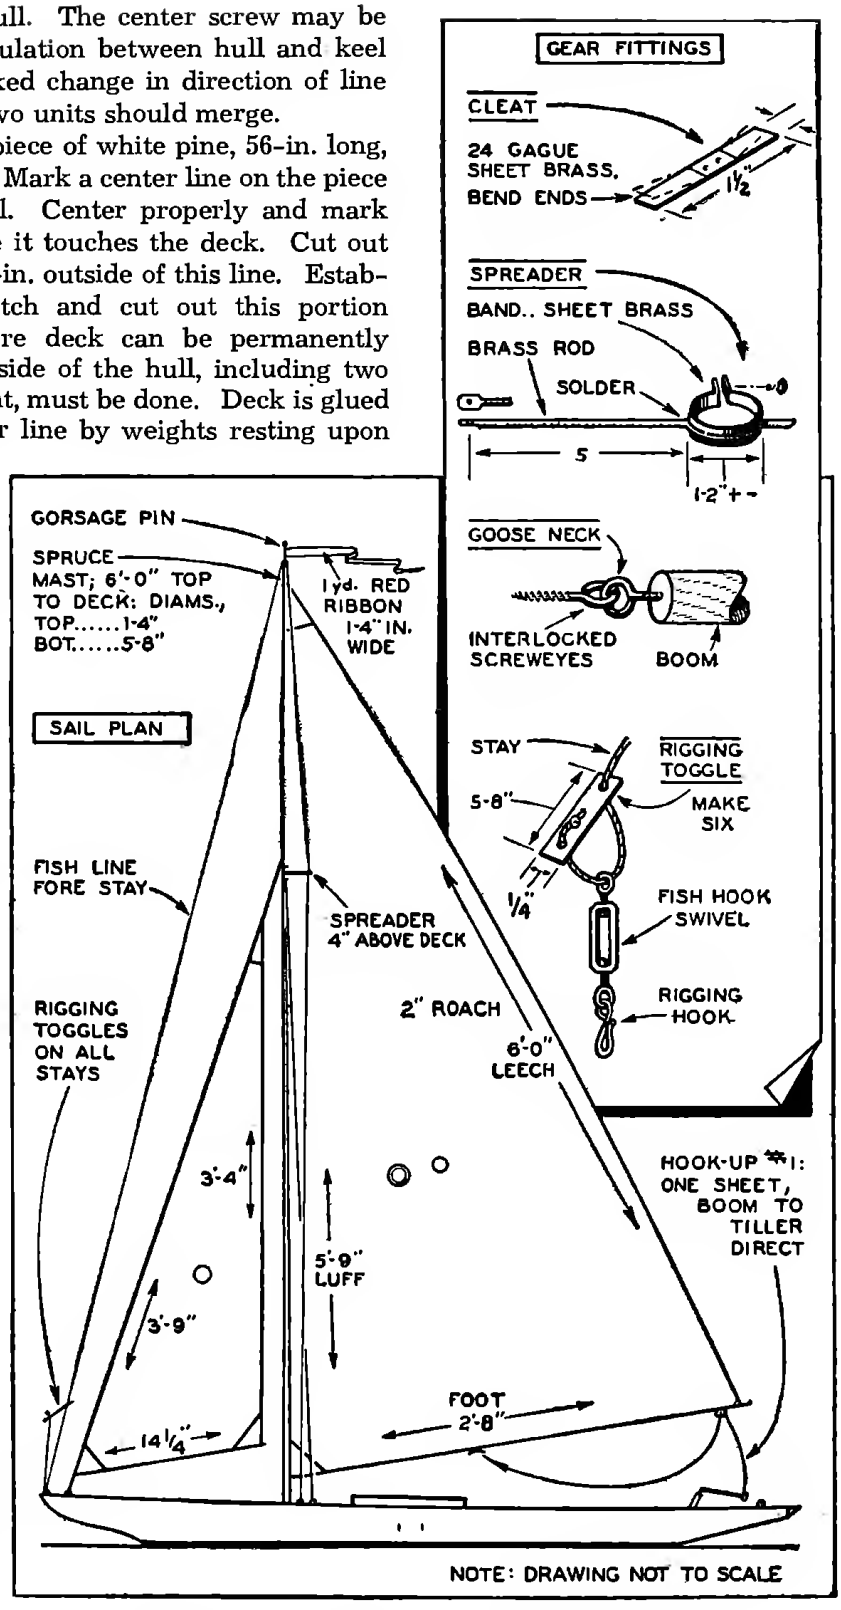

Sail plan and fittings. Fishline or piano wire can be used for stays, and deck hardware is cut from sheet brass. There is no mass of complicated gear as everything was designed from a standpoint of utility and simplicity.

teresting as well as satisfactory performance.

Complete blueprints for Rubaiyat *are available at $1.50 postpaid. Order by number (314) addressing Fawcett Publications, Inc., Greenwich, Conn., enclosing check or money order.*

BILL OF MATERIALS FOR "RUBAIYAT"

Hull: Clear white pine 42"x4¾"x1" exact
Keel: Clear white pine 18"x6"x1"
Deck: Clear white pine 56"x10"x⅛"
Mast: Spruce 6'0"x¾"x¾"
Boom: Birch dowel 36"x¼"
Jig boom: Birch dowel 36"x⅛"
Deck beams, etc., White pine trim 6'x1"x¼"
Hatch cover—Cigar box cover
10 lbs. sheet lead
3—3", No. 12, round head, brass screws
12—⅜", No. 0, flat head, brass screws
1 dozen small screw eyes
1 bank heavy fish line
5 fish hook swivels (dummy turnbuckles)
1 sq. ft. 24 gauge, galvanized sheet iron
1 ft. copper tubing ⅛" inside diam.
3" brass rod (to fit into brass tube)
1 mast step for ⅝" mast
½ lb. can marine glue
1 pt. clear shellac
1 pt. spar varnish
1 pt. outside white paint
1 pt. outside green paint
2 yds. bleached muslin
medium elastic bands

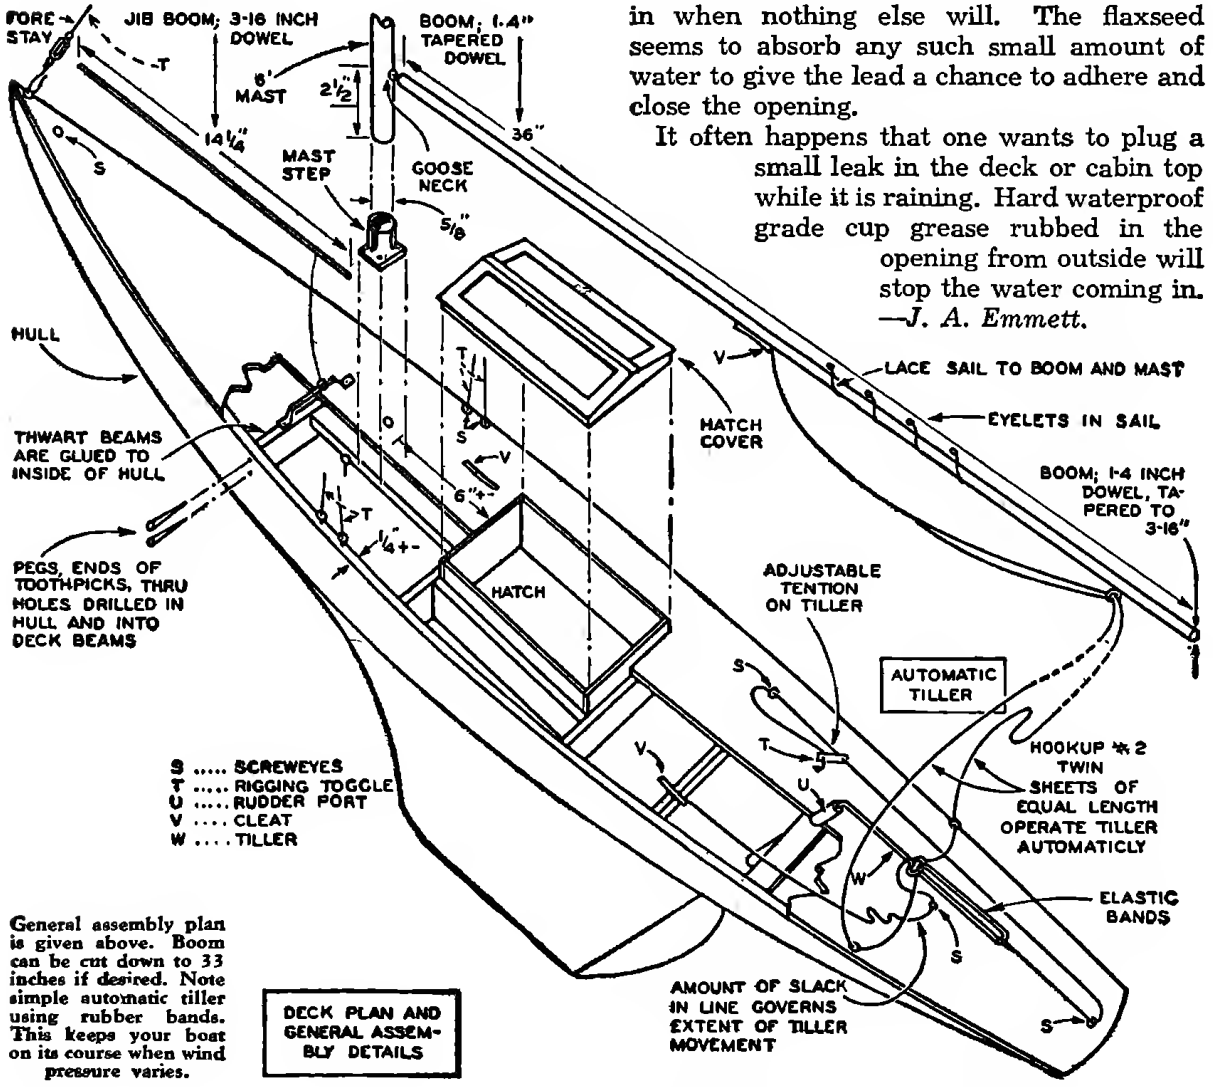

General assembly plan is given above. Boom can be cut down to 33 inches if desired. Note simple automatic tiller using rubber bands. This keeps your boat on its course when wind pressure varies.

DECK PLAN AND GENERAL ASSEMBLY DETAILS

Stopping Small Leaks

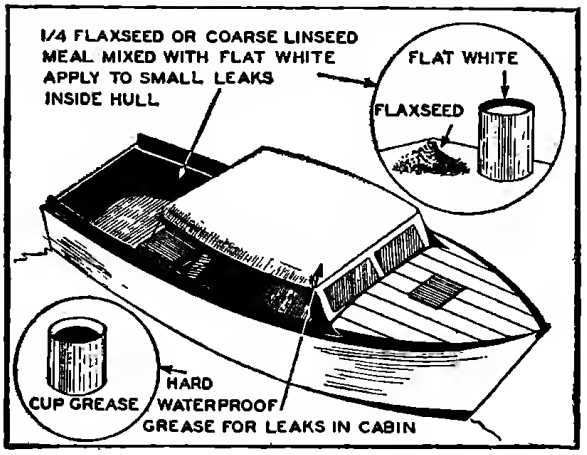
1/4 FLAXSEED OR COARSE LINSEED MEAL MIXED WITH FLAT WHITE APPLY TO SMALL LEAKS INSIDE HULL
FLAT WHITE
FLAXSEED
CUP GREASE
HARD WATERPROOF GREASE FOR LEAKS IN CABIN

TWENTY-FIVE per cent flaxseed or coarse linseed meal mixed with white lead and applied to a leaking water pipe connection or to small leaks or seeping places inside the hull will often stop the water from coming in when nothing else will. The flaxseed seems to absorb any such small amount of water to give the lead a chance to adhere and close the opening.

It often happens that one wants to plug a small leak in the deck or cabin top while it is raining. Hard waterproof grade cup grease rubbed in the opening from outside will stop the water coming in. —*J. A. Emmett.*

Mount Vernon PLAYHOUSE

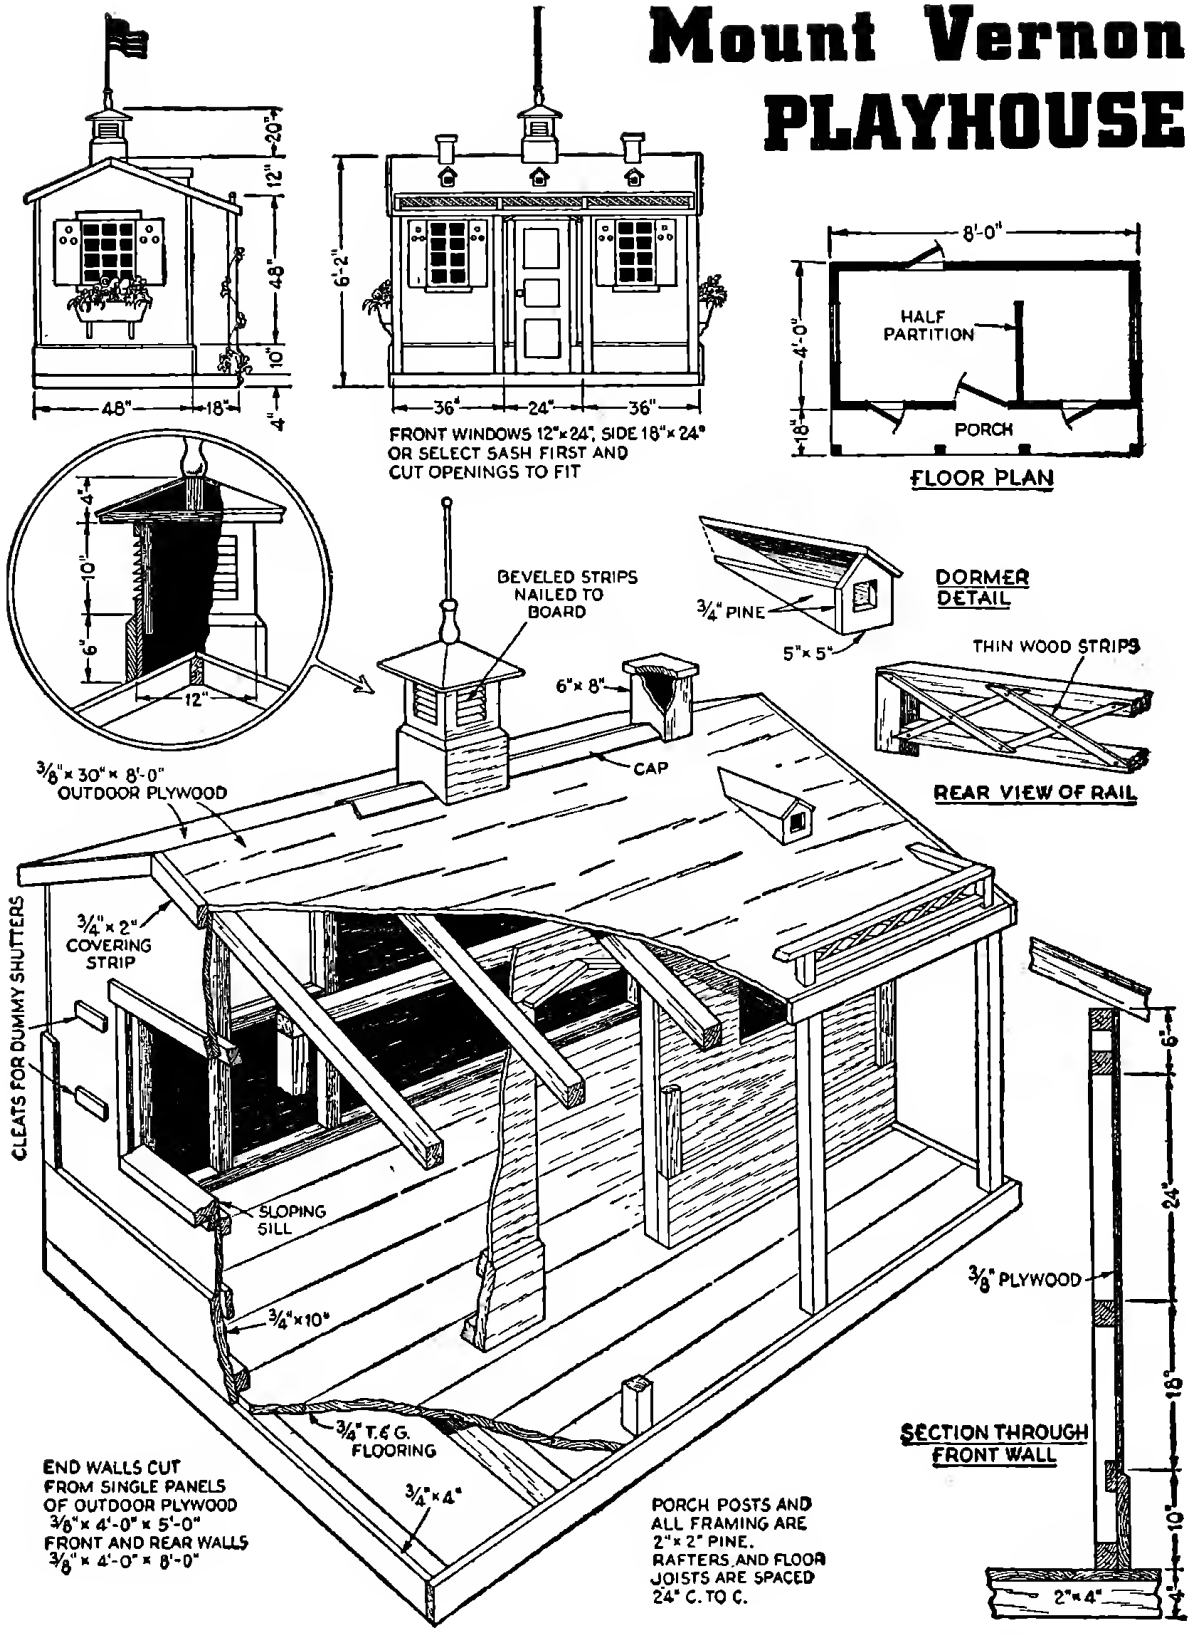

THIS very much modified version of Washington's home on the Potomac has a double purpose: after the children have outgrown it you have a very convenient tool house for the garden. First of all, it is designed for simplicity of construction. Cupola, rail above porch, shutters and window boxes

[*Continued on page* 132]

"ICE LIZARD"

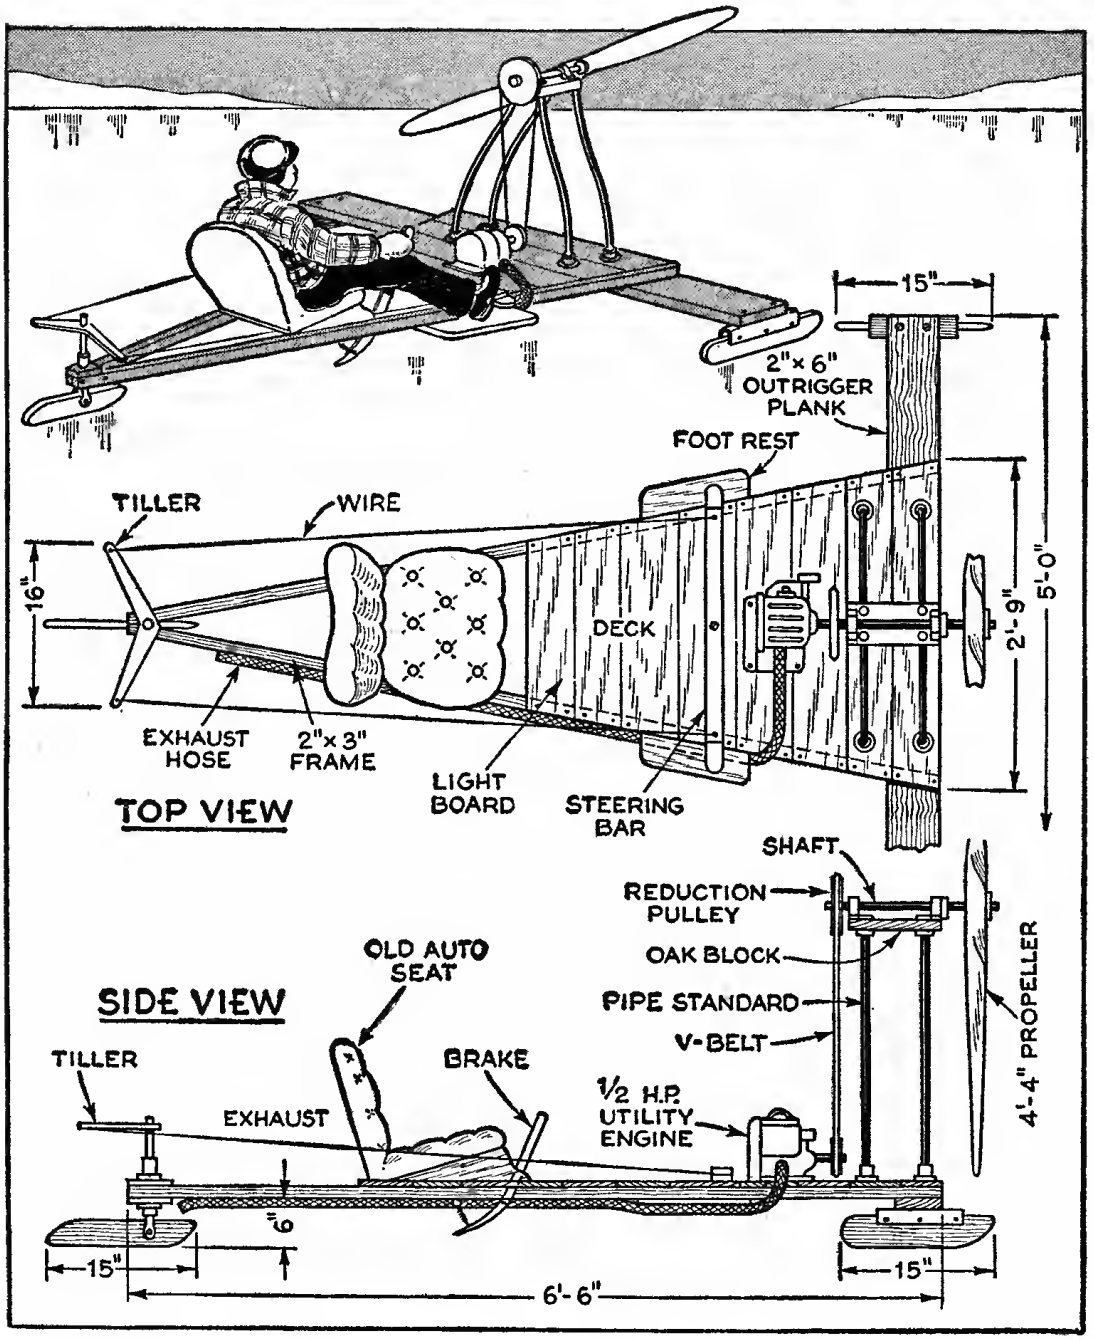

by L. B. Robbins

AIR minded, ice-boat and mechanically-inclined fans: here is something to arouse your imagination and ingenuity—an air propelled ice-boat using a washing-machine engine for power and capable of good speed and breath-taking thrills. Let's build a fleet of these "Ice Lizards" for the height of the skating season and give the populace something to talk about.

The body consists of an outrigger plank 5 feet long, 2 inches thick and 6 inches wide. To this are bolted two pieces of 2x3 finished stock, on edge, fanned out on the outrigger 2 feet, 9 inches. At the stern they are beveled to fit together, and bolted. The length of these 2x3's should be such as to make the

total length of the craft 6 feet, 6 inches over all. The outrigger forms the bow and the pointed end is the stern.

Next, plank over the body from the bow to within about 2 feet of the stern, with light matched boards. At the extreme stern end of this deck mount the seat. An old bucket seat from a discarded automobile will be just the thing. In lieu of this get hold of any single driver's seat from the auto junk-yard and tip it back about as shown, shimming its front edge up with triangular shaped pieces of wood under each side.

The two runners and the rudder are shown in detail. The latter should be made somewhat narrower than the runners to compensate for the additional iron-work below the body. By doing this the body will be supported horizontally on the ice. All three blades can be fashioned from sheet steel and measure 15 inches long. The front and bottom edges must be ground to a V edge and ground sharp. The rudder has a hole drilled somewhat forward and above center to which is pivot-bolted the fork in the bottom end of the rudder post. This latter can be made from ½ inch pipe with the top end filed square and drilled for a pin. A rudder post bearing is made from a length of ¾-inch pipe driven through a hole in the stern joint of the side pieces. Screw two wooden triangles to the top and bottom of this joint and then secure the bearing in place with pipe locknuts above and below. The height of the stern above the rudder can be adjusted by the collar adjustment on the rudder post as shown. The tiller is shaped and dimensioned as indicated and cut from flat steel. Drill a small hole in each wing and fashion a square hole in the center to fit and pin over the top of the rudder post.

The runners, as before stated, are the same length as the rudder but wider. To the top edge is bolted a suitable length of channel iron which in turn can be bolted to the under side of the outrigger at each end. These are also V shaped and ground to a sharp edge along the bottom and front.

The steering-bar consists of a piece of hard wood a foot longer than the body at a position in front of the driver's seat, as shown. It should be pivot-bolted to the center of the body and its ends connected to the tiller by taut drawn steel wire. Small turn-buckles may be inserted if desired, to true up this steering system, as it is important that this be strong and easy operating during speed sailing.

For braking purposes a simple drag is resorted to. This is a boomerang shaped piece of flat bar steel, taped at one end for the handle and the lower end ground to a point to dig into the ice. A slot should be cut in the center of the deck just forward of the seat and an oak block bolted below and to one side. The brake is then pivot-bolted to the block through a hole drilled in its bend. A spiral spring is then inserted between a hole near the point and the under side of the deck to hold the point off the ice. To brake it is only necessary to pull back on the brake handle and the point digs the ice until "lizard" comes to a stop.

Lastly, securely fasten two wooden footrests to the under side of the body and below the steering-bar as indicated. This allows the driver to rest his feet on these boards and at the same time press along on one side of the steering-bar or the other and direct the course of the craft.

[*Continued on page* 128]

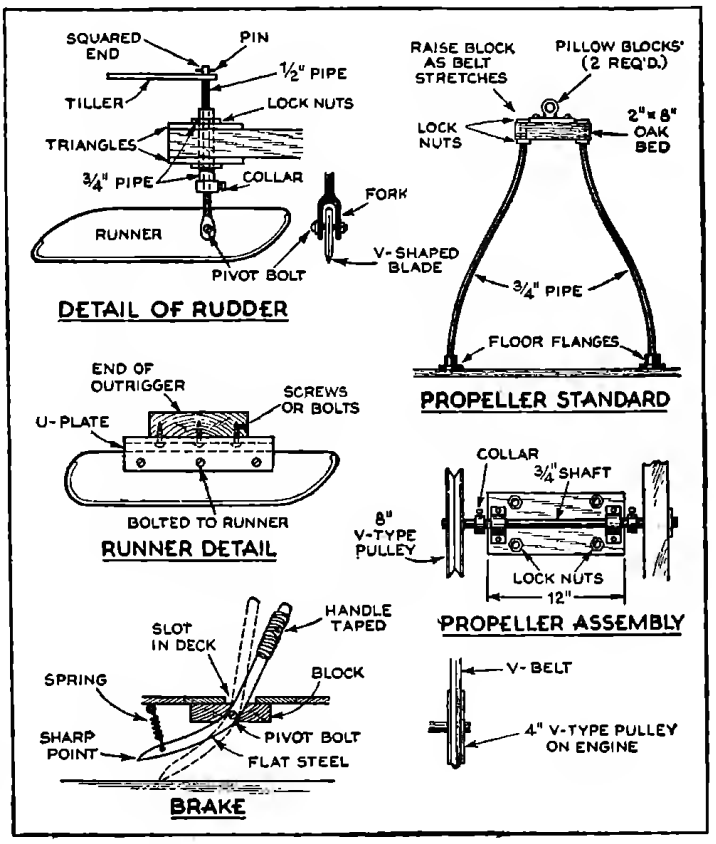

Make This Snow Boat From Scrap Materials

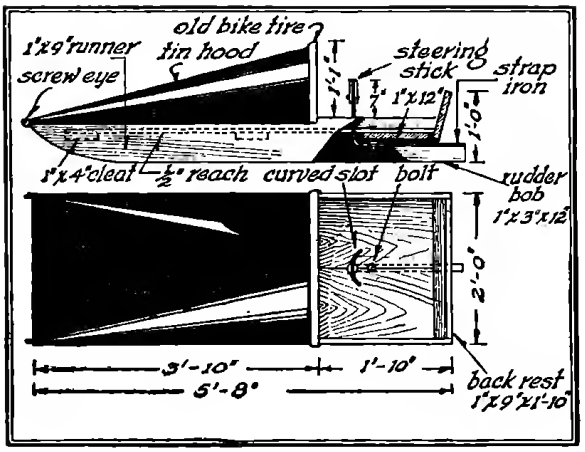

MAKE the runners from one-by-nine boards, 5 feet 8 inches long, fastening them together with one-by-four cleats at the front and middle, 3 inches below the upper edges of the runners. Cover the cleats with half-inch floor boards, and nail a one-by-twelve across the rear end of the floor, between the runners, to support the seat. Nail a board 9 inches wide and 1 foot, 10 inches long at an angle between the runners at the rear, for the back rest.

The rudder bob is 1 inch thick, 3 inches wide, and 12 inches long, with a length of strap iron fastened with screws to the upper edge of the runner, and bent at right angles, the upper end of the strap-iron sliding in a curve slot cut in the floor as shown. Drill holes in the iron for the rudder screws, a large one for the bolt axle, and one or two in the upper end so that you can fasten boards on either side for the grip at the top of the steering iron, which should extend about 7 inches above the upper edge of the runners. Fasten washers between the strap-iron and underside of the floor, and grease them to permit the stick to turn easily.

Fasten large screw-eyes in the front ends of the runners, and make a pull rope with one end doubled and a harness snap fastened in each end, so that you can quickly snap them into the screw-eyes for pulling the sled back up hill. Carry the rope inside the sled going down. If posible cover the front of the sled with tin, to form the hood, bending it in the shape shown, and tacking it along the edges of the runners. Otherwise bend a length of strap-iron in a curve, bolting the ends to the sides of the runners, and drawing canvas or a cotton sheet over the strap-iron frame where it can be stitched in place. Tack the canvas along the edge of the runners. Tin makes the more durable hood, however.

Ice Tops

IF YOU have a lathe, these tops will be easy to make from hardwood. Otherwise whittle them from pine, using blocks 3 or 4 inches square at the end and from 4½ to 5 inches long. Plane down the blocks until they are square, draw a circle at one end of the block, and find the middle of the other end. The spindle top is whittled out in one piece. Make a circular saw cut 1½ inches below the top, leaving the center which you can whittle into the spindle after cutting away the surplus around it. Whittle the remainder of the top in a smooth cone shape. The other top is egg-shaped at the top, and fitted with a nail at the bottom, filed to a sharp point. To spin the egg top, wrap a six-foot [*Continued on page* 133]

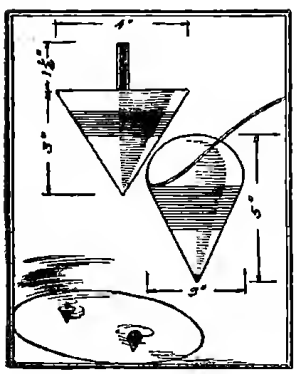

Lead Skate Sheath

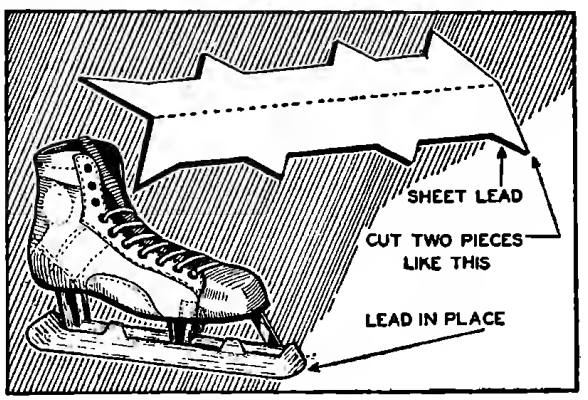

YOU can make this pair of lead sheaths for your skates and save much dulling. As you carry skates over your shoulder, or in your hands to and from the skating place, the keen runners often bump against each other. These little nicks thus caused often do much more damage than actual skating. The lead sheaths will protect the runners and keep [*Continued on page* 132]

Sheepskin Helmet and "Mocs"

USE the sheep-skin lining from an old jacket or coat to make a set of "mocs" and a helmet for cold weather. The helmet fits snugly about the head and is fastened by a short web strap and buckle, such as a skate strap. It can be worn as shown, or with the wool turned on the outside. The "mocs" are just the thing to slip into on biting cold days, or when you first get up in the morning. Although not heavy enough for out-of-doors, they are warm and comfortable in the house.

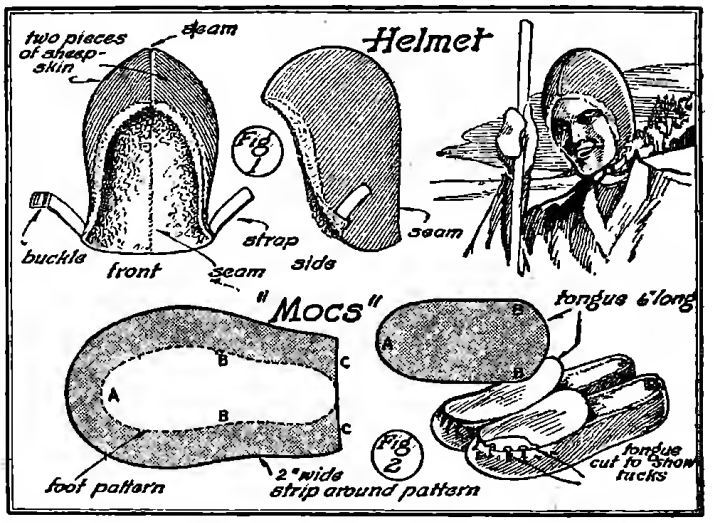

Use a flour sack or stocking pulled over the head for the helmet pattern, pinning up the slack until you get it to fit snugly. Cut out the pattern from the sack or stocking, cutting down the center to form two pieces, and leaving a 2-inch margin around each piece which can later be trimmed away. Note how the front opening extends from the forehead, down across the cheek, and to the neck. Place the pattern pieces on the skin side of the sheep-skin, cutting them out. Lay the pieces together, wool outside, and with stout needle and heavy thread sew the two pieces together.

Before pieces of sheep-skin are stitched together in making helmet or "mocs," trim away a narrow strip of wool from the skin along the edge to be stitched. Pin the pieces together first, fitting it on the head, and taking up the slack, before doing the final stitching with thread. When sewn, turn the helmet with the skin outside, and stitch the short sections of strap to the lower part of the helmet so that it can be closed at the throat. Turn back the edge on each side of the face, stitching it down, to give a wool-trimmed effect around the face.

To make the "mocs," place your stocking feet on the skin side of a piece of sheep-skin and mark around the feet with pencil. Outside these lines mark the outside line of the pattern, making it 2 inches larger all around, except at the heel, which is cut square across. Trim out as shown. Cut out the two tongue pieces, making them the same as the outline of the foot at A, B, B. Fold up the front edge of the moccasin pattern, and take four or five tucks in the edge, gathering the skin together and stitching it as shown in the drawing. This draws up the sole to fit the foot. Stitch the tongues in place, sewing the edges of the skin together with over-and-over stitch. Turn the edge at the heel wool-side out, and stitch the edges C, C, together; then turn them back with the wool inside.—*G. E. V. H.*

Garage Snow Guards

KEEP drifting snow from filling the garage drive and banking against the garage doors by installing a pair of these folding panels or doors. When the doors are not in use, they can be folded neatly back against the side of the garage, where they are secured with hooks. Make each door about 3 feet wide and 5 feet high, using one-by-four boards, mitered at the corners, for the frame and covered with wide boards or matched lumber on the back. Fasten each pair of doors together with heavy hinges as shown, and fasten the panel adjoining the corner of the garage with another set of hinges. The extended doors are held in place with stakes.

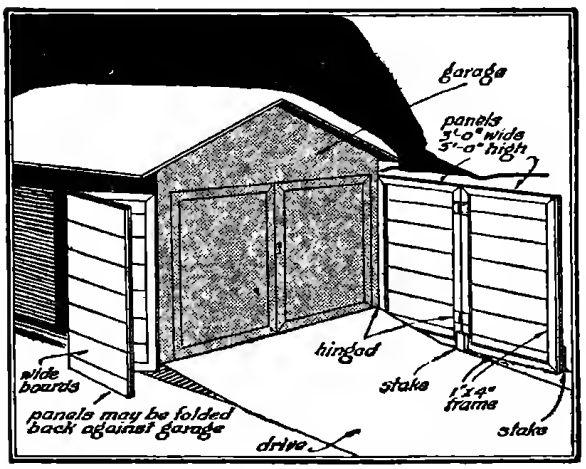

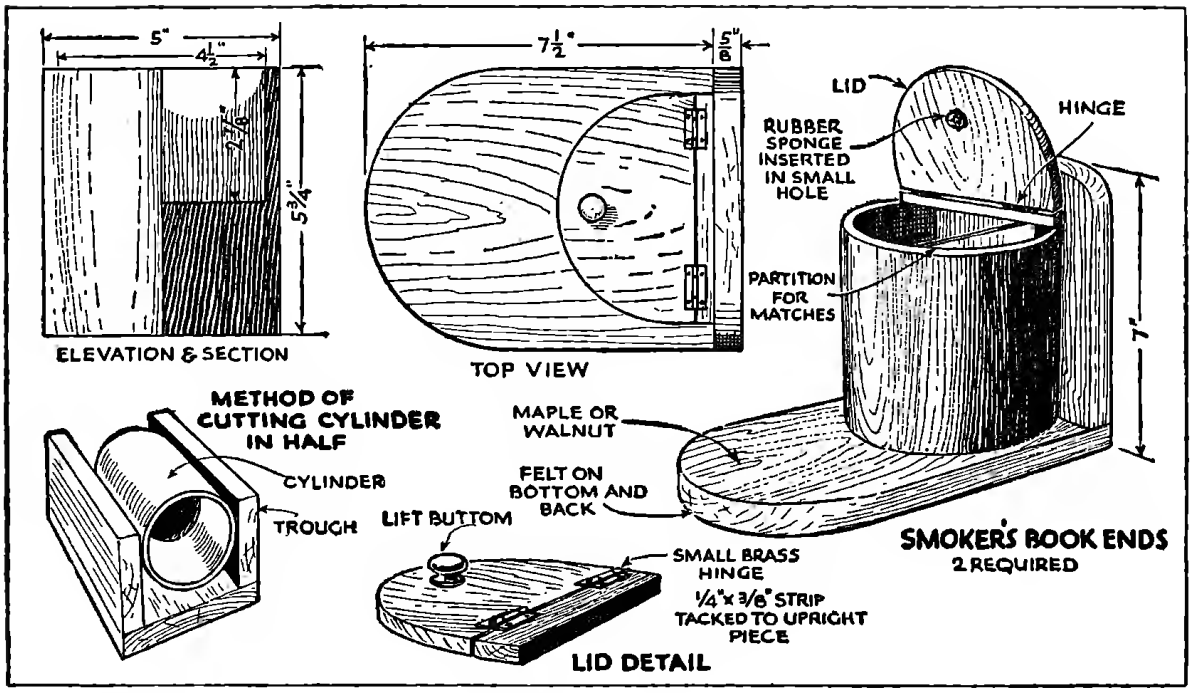

BOOK ENDS FOR A MAN'S DEN

by Dale R. Van Horn

BOTH of these book end projects have sufficient novelty to make their construction enjoyable. Neither is expensive. The enterprising shop owner may see here a chance at some spare-time profits. Cost can be kept to a minimum on the smoker's book end by utilizing round walnut or other wood from the home wood pile. If you have none of your own, then a trip into the country will usually yield several pieces of walnut, maple or other appropriate wood which has pretty well cured while a dead tree still stood before it was cut down. Often minor checks seen on the surface go only a little ways into the trunk. When choosing such wood be sure to obtain pieces sufficiently larger than the project in mind to permit the turning away of all sap (white) wood so that only heart wood will show up in the finished piece.

As for the copper for the disc book ends, the best plan of course is to buy new sheet copper from the hardware store. The piece of thick copper for the head cutouts is small, and the four discs used to cover the maple discs can be of thin gauge, thus keeping the cost down. At a roofer's shop you may be able to pick up scrap sheet copper suitable for the purpose for only a fraction of the cost of new sheet copper.

Smoker's Book Ends: This project requires four pieces of flat stock, a turned cylinder of solid wood and a thin turned disc for the lids, with four tiny brass hinges and screws, a bit of wood scrap for hinge blocks, some felt for backing and glue.

Mount the stock for the cylinder on the face plate and fasten it firmly with long wood screws, leaving enough extra length for waste. Turn this down to 5 inches in diameter and 5¾ inches long; then sand smooth. Back the tail stock away and turn a depression 4½ inches in diameter and 2⅞ inches deep so that the lid will close when cigarettes are placed inside. If walnut is used, next fill the outside with paste wood filler to which has been added enough walnut stain to make it match the wood. Maple, gum and other close grained woods do not require filler. Maple stain can be used on white pine, however, to give a nice modern tone to the project. If this is done, cut the base and upright pieces from white pine also, and stain.

After the filler has remained in place for a couple of hours, wipe off all surplus with the lathe running at fair speed, then turn up to high speed and polish. A spray gun coat of clear lacquer will finish it nicely. When this has dried, dress down lightly with No. 000 steel wool, then give a coat of polishing wax. Remove the cylinder from the face plate,

turn upright and pour into the cavity a quantity of piping hot paraffine. Turn the cylinder slowly so that all parts of the sides and bottom are coated. The wax quickly penetrates the fibers of the wood, making them air tight. Then pour out the surplus wax. This turns the cavities into good humidors.

To saw the cylinder accurately in two, make a trough with bottom and sides from scrap lumber, not quite wide enough to permit the cylinder to touch bottom. This causes the cylinder to drop to a pinch fit between the sides. The trough is moved along a straight edge or fence on the band saw table, the blade cutting the cylinder through from end to end. Be sure to make a test cut or two so that one half of the cylinder won't be larger than the other.

Now run each cylinder half over the jointer, or a board on which sandpaper has been carefully glued, to true up the cuts and remove tooth marks. Turn a disc of the same 5-inch diameter ½ or ⅜-inch thick. Cut this into two segments which, when fastened to the hinge blocks, will line up with the cylinder segments. The hinge blocks are fastened with a screw through each end with the head countersunk. Or the head may be turned below the surface and a wood plug glued over it so the screws won't show.

Cut two pieces 7 inches long and two 7½ inches long for the bases and uprights. Cut the front ends of the base pieces to a full half circle, but merely round the corners of the upright. Nail and glue these together to form right angles. Their widths are 6 inches, their thickness, ⅝-inch. Finish these on the edges and exposed sides as you did the cylinder. Nail or fasten each cylinder half as indicated with screws and glue, making sure the joints are tight. Then cover book side and bottom with felt glued on.

A small hole can be cut into the under side of each lid, this paraffined and then a piece of sponge rubber edged in place so that it can be moistened when desired and thus prevent the contents of the humidors from drying out. The lift buttons are turned from scrap with a short tenon which is glued into a hole bored for it. If desired, a thin partition can be glued into one half cylinder to form a separate compartment for matches. One sketch suggests this.

An alternative design is to turn two identical cylinders and use two-thirds of each, thus providing greater capacity in each. If this is done, the cylinder diameter may be reduced from 5 to 4½ or 4 inches, if desired. Lacking solid wood, the cylinder blocks may be glued up from boards of any convenient thickness. The solid blocks will produce the nicest grain effects.

[*Continued on page* 131]

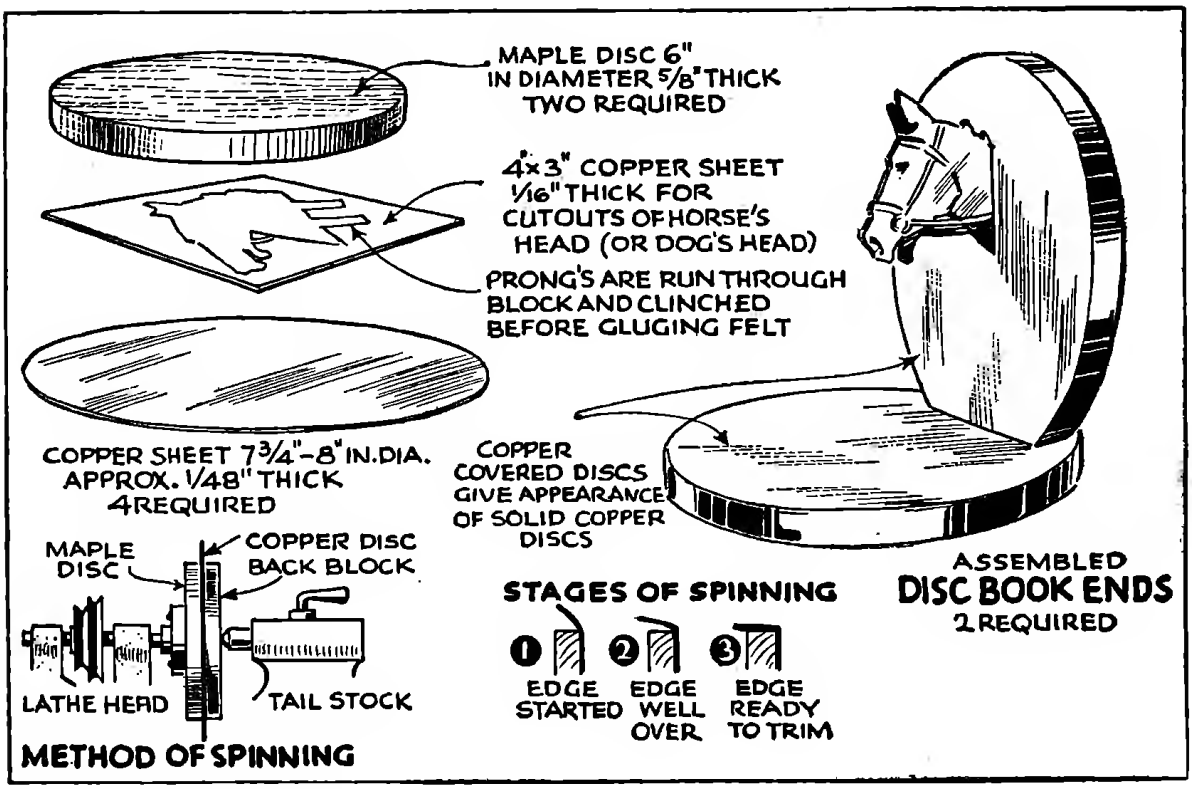
MAPLE DISC 6" IN DIAMETER 5/8" THICK TWO REQUIRED
4"x3" COPPER SHEET 1/16" THICK FOR CUTOUTS OF HORSE'S HEAD (OR DOG'S HEAD)
PRONG'S ARE RUN THROUGH BLOCK AND CLINCHED BEFORE GLUGING FELT
COPPER SHEET 7¾"-8" IN.DIA. APPROX. 1/48" THICK 4 REQUIRED
COPPER COVERED DISCS GIVE APPEARANCE OF SOLID COPPER DISCS
ASSEMBLED DISC BOOK ENDS 2 REQUIRED
MAPLE DISC
COPPER DISC BACK BLOCK
LATHE HEAD
TAIL STOCK
METHOD OF SPINNING
STAGES OF SPINNING
1 EDGE STARTED
2 EDGE WELL OVER
3 EDGE READY TO TRIM

SHOP SHORT-CUTS

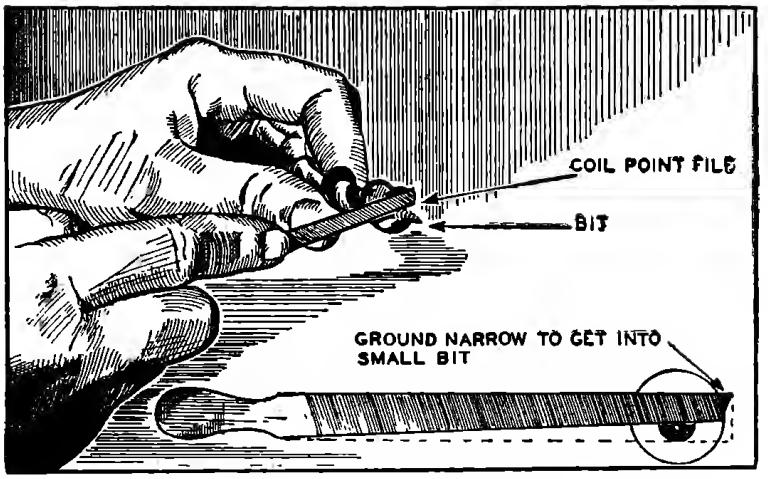

Point File Keeps Bits Sharp

IF YOUR augur bits need touching up and you have no regular augur bit file at hand an excellent substitute can be had by purchasing an auto coil point file, obtainable at any hardware or auto supply store. They are very cheap, costing only 5 or 6 cents each. Grind this file to a long taper, as shown, leaving the point very narrow. The resulting tool can be used to sharpen both lips and spurs of even the smaller sizes of augurs.—*W. C. W.*

Turntable Aids Paint Spraying

A TURNTABLE is a real aid to the craftsman. Its revolving action eliminates handling of the work while spraying or painting and the work can be raised or lowered to a convenient level. Drawing at right shows a simple but effective turntable that can be made in a short time with hand tools. The circular top is best made of plywood, while scrap lumber will suffice for the base.—*R. F. K.*

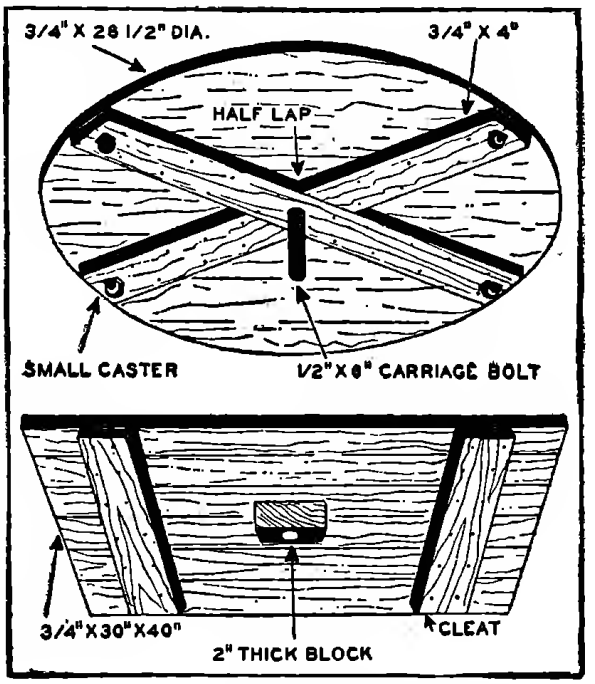

Ball Bearings Center Parts In Wood

ACCURATE and speedy centering of adjacent wood to wood, or wood to metal faces while assembling finished or semi-finished articles, can be conveniently done by making use of small ball bearings. Determine the center of each face by any standard method and drill a hole to a depth approximately equal to the radius of the ball, the drill having a diameter equal to that of the ball. Gently tap the ball into one of the holes and place this part over the other one.—*W. W.*

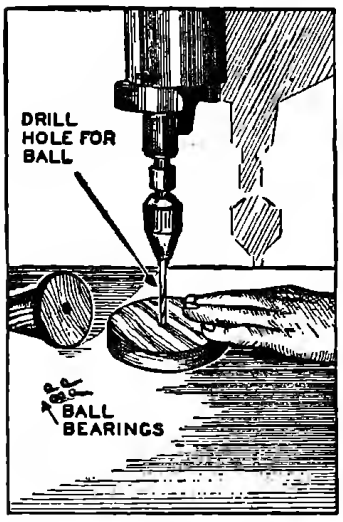

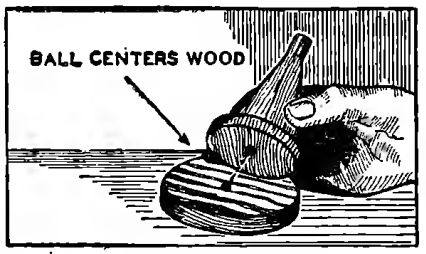

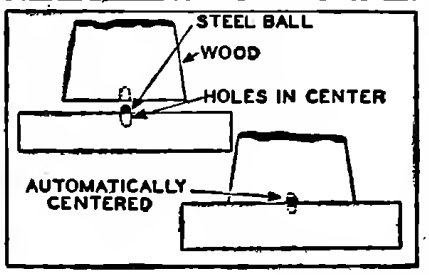

Face Plate Vise

A SMALL vise mounted on the face plate of a metal turning lathe supplies a very convenient means of clamping irregular and flat shaped pieces for facing and boring. The best vise for this purpose is one that is now being sold in the ten-cent stores for 25c. To insure that the face of the fixed jaw is exactly at right angles to the face plate, bolt a piece of square stock on the face plate, clamp the vise jaws on this piece which will allow you to face the base of the vise on the lathe with the

[*Continued on page* 142]

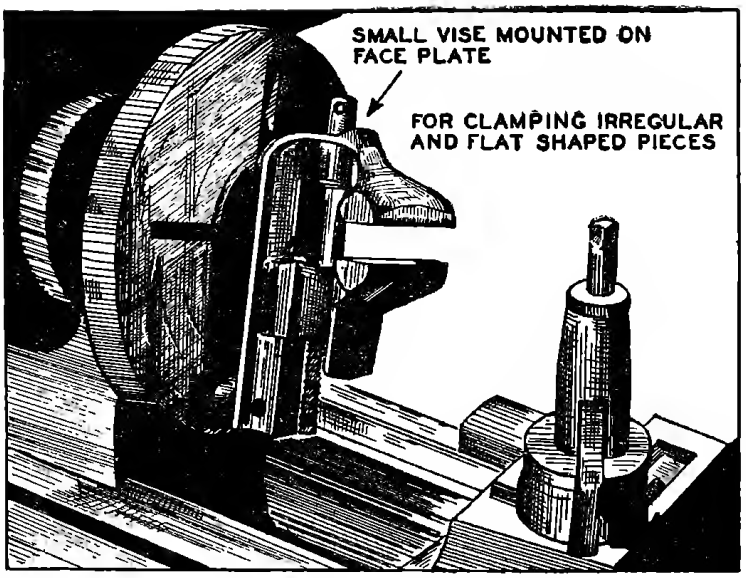

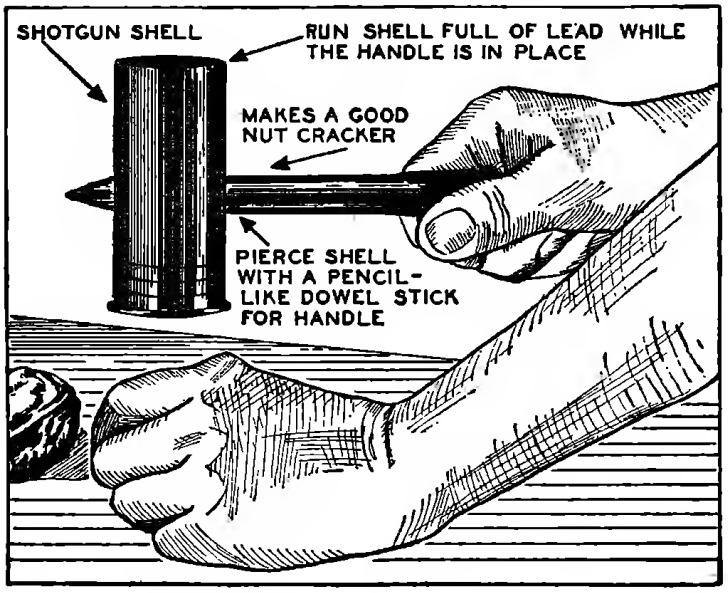
SHOTGUN SHELL
RUN SHELL FULL OF LEAD WHILE THE HANDLE IS IN PLACE
MAKES A GOOD NUT CRACKER
PIERCE SHELL WITH A PENCIL-LIKE DOWEL STICK FOR HANDLE

A Shotgun Shell Hammer

A USEFUL and handy soft hammer may be readily improvised by using a 10-gauge shotgun shell for a mould. Pierce the side of the shell with a pencil-like dowel stick for a handle and run the shell full of molten lead while the handle is in place.

Do not remove the shell but allow it to wear off. This hammer makes a good nut cracker and does not scar the furniture. Incidentally, be sure the percussion cap on the shell has been exploded before you attempt pouring in the lead.—*J. G. V. H.*

Easy Way to Edge-sand Circular Work

PIVOT sanding of circular work on the belt sander can be done with the use of the simple jig shown at right. This consists of a piece of ¾-in. stock measuring about 8x12-in.

In use, an approximate pivot pin location is selected and the pivot pin, (a ¼-in. dowel) is inserted in the hole. The work is fitted on the pin, then the adjusting nuts are turned so that the work comes into contact with the belt and is slowly rotated to sand the whole edge.—*R. F. K.*

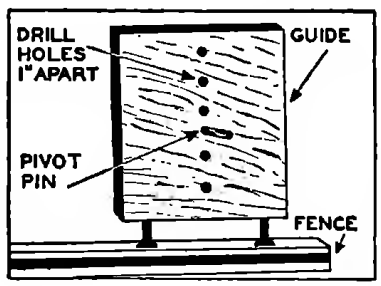

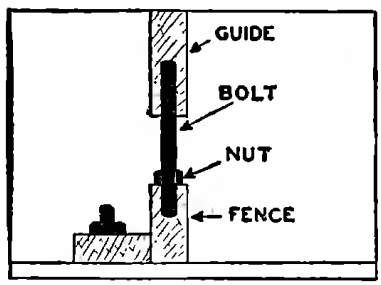

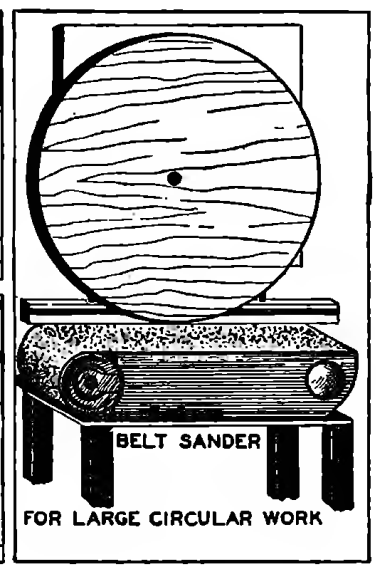

Oil Drum STOVES

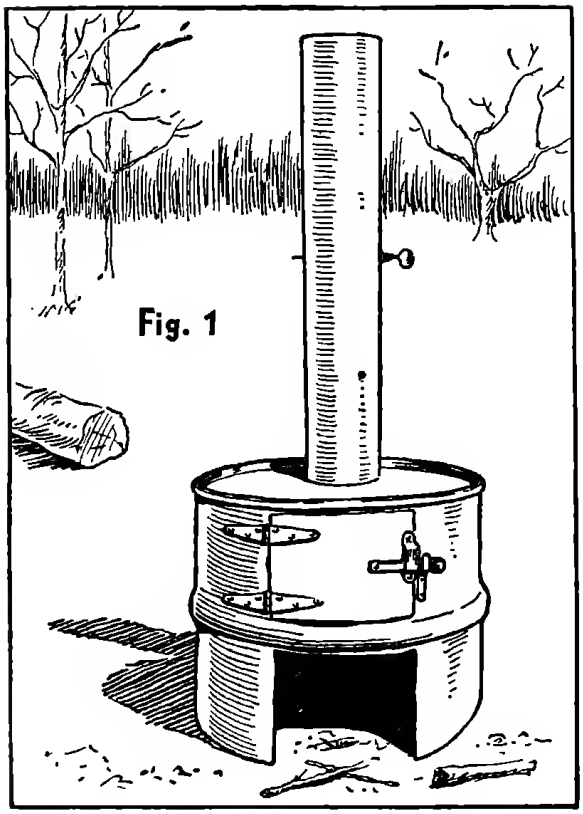

YOU can make an excellent stove for the camp, cook shack or backyard from an old oil drum! Above are two good examples. Figure 1 shows half a drum set on the ground with points sticking up around a hole at the back side to make a tight fit for the stove pipe.

Two openings are cut in the front. One piece is hinged back in place and becomes the fuel door. It has a lock made from strap iron. The section cut from the lower opening is thrown away, this hole forming the ash pit. For the grate, several iron rods are pushed through holes made for them half way up between top and bottom. They are spaced 4 inches apart.

A whole drum is used in Figure 2. With two L-shaped strap irons bolted to one end, it stands rigid. A short elbow flue is fitted into a hole in one end, the upper half cut away and the sides bent over to take the top of an old-fashioned gas stove as indicated. Part of the cutout end is used to close the opening at the right of the grate—small stove bolts holding it firmly in place. This stove

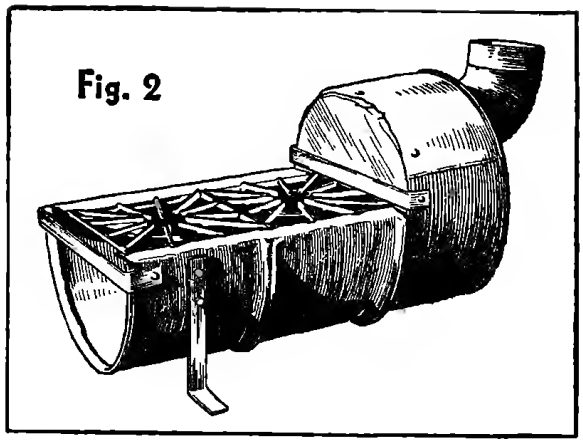

is so light that it can be tossed into the back end of the car easily.

Figure 3 shows a good example of the use of old oil drums to increase the efficiency of coal burning stoves of the type still widely employed in country stores. The owner of the business estimates that at least 25% additional heat is obtained, particularly when a small fan is mounted at one end to force a stream of air through the center.

One such installation has this tube running through level; another provides a tube (10 inches in diameter) with one end three inches higher than the other. The tubes were made much like a stove pipe but in three sections, a center section and the two end pieces with collars, so that the whole assembly could be made without opening the barrels. A few spot welds hold the tube in place.—*D. R. Van Horn.*

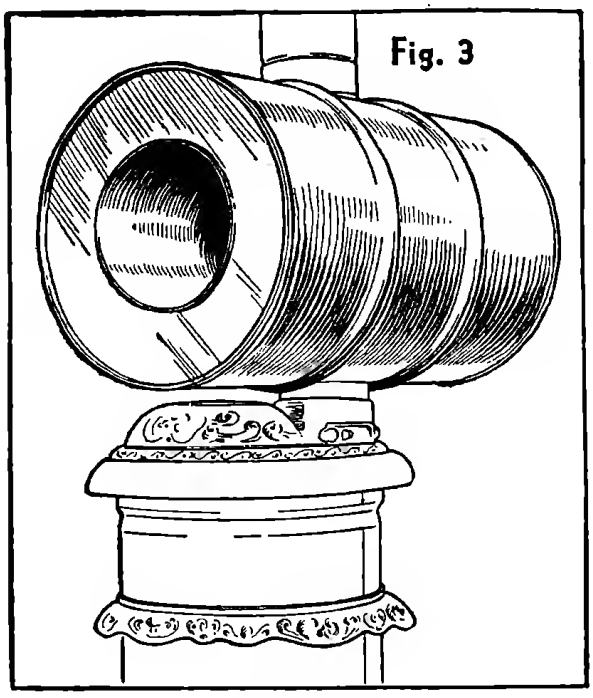

Modernistic End Table

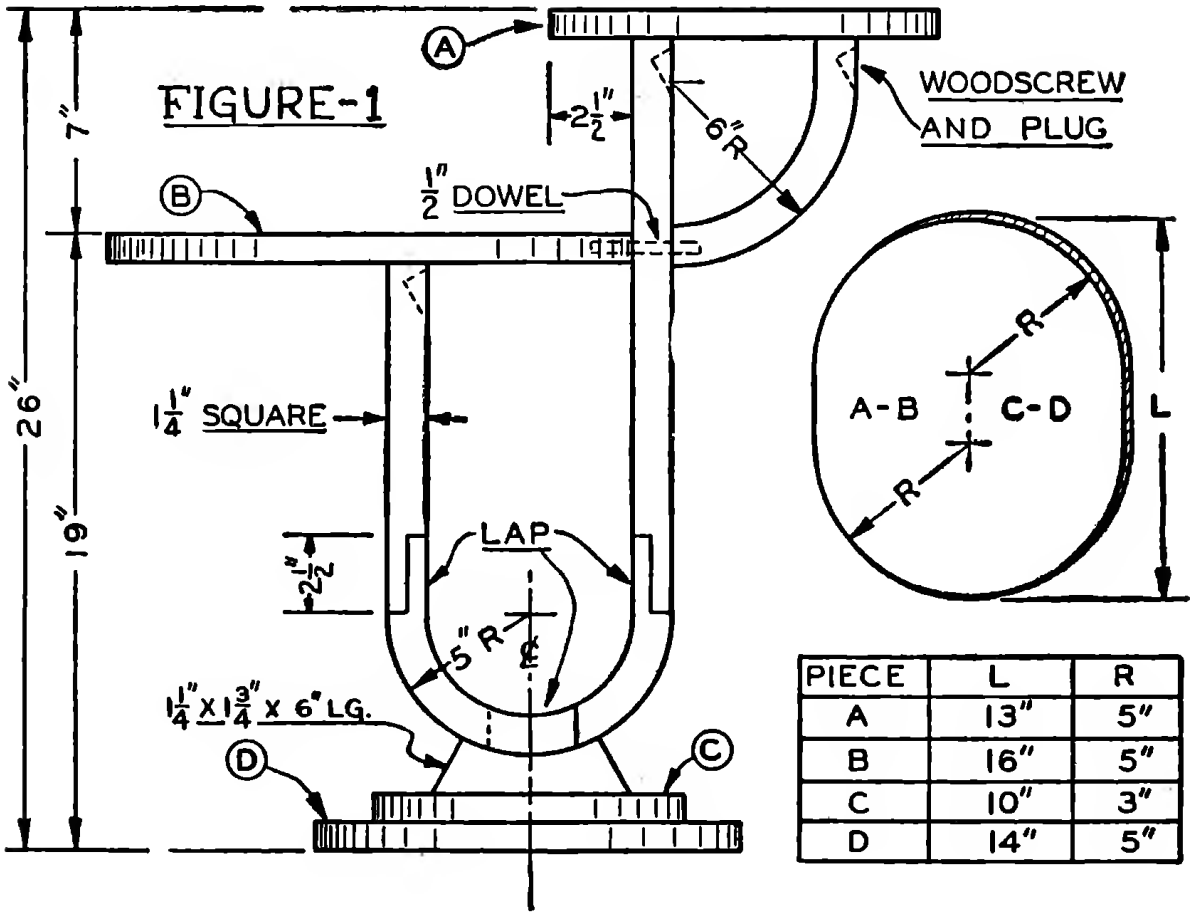

PIECE	L	R
A	13"	5"
B	16"	5"
C	10"	3"
D	14"	5"

(Picture of finished table on page 80)

FOR the craftsman who likes to make useful things for the home, this modern end table is of striking design and yet simple in construction, and requires only two evenings to construct.

It is suggested that maple, birch or walnut be used for the tops and base pieces and that poplar or white pine be used for the curved stem pieces. To begin the construction, lay out the four pieces A-B-C-D as shown in Fig. 1 and saw these out on the band or jig saw. Sand the top faces and the edges of these pieces. Now on a piece of the poplar or pine 7"x7"x1¼" lay out a 5" radius in one corner. On the same center draw a 3¾" radius. Now mark off the quadrant area using the center of the arcs. Continue the arcs to the edge of the wood at the cross grain end and at the other end (with the grain) draw the lines tangent to the curves to the edge of the wood. Now saw out this 1¼" section on the band saw. A heavy jig saw will do if a band saw is not available.

Now using this piece as a template, cut out another identical piece. In the curved sections of these pieces mark off half the thickness of the stock for a half-lap in a vertical plane. Saw out these sections with a back saw, then match the laps using a wood rasp. The purpose of all this is to arrive at a 180 degree curved piece which is 1¼" square. Now saw out the tangent ends also for a half-lap joint but at 90 degrees to the half-lap on the curve. A glance at the drawing will render this explantion clear.

Cut out two pieces of 1¼" square stock, one about 11" long and the other about 18" long and cut these for half-lap joints to match the laps cut in the tangent laps. With these pieces cut, glue up these joints using clamps, taking care to get the long pieces parallel. When the glue job is set sand these three joints until they are smooth. On a piece of similar stock 1¼"x1¾"x6" long, lay out a 5" radius arc from the centerline then mark off the ends at 30 degrees, then saw this piece out on the band saw. Screw this piece to the

[*Continued on page* 130]

MAKE YOUR OWN SAILBOAT

by George E. Basich

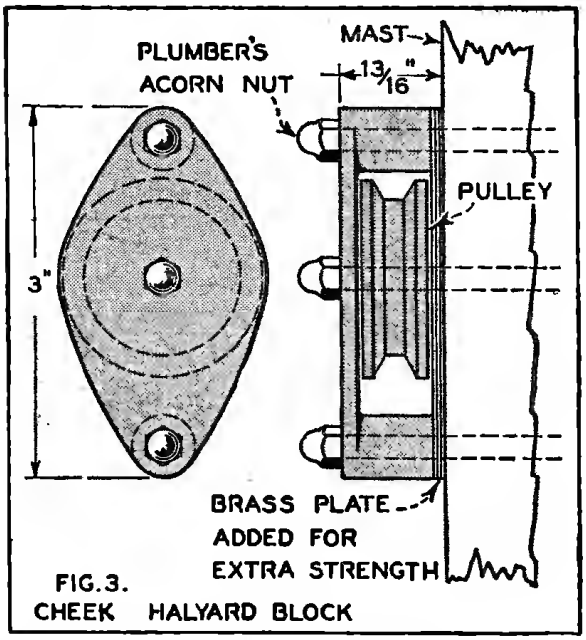

FIG. 3.
CHEEK HALYARD BLOCK

Above: Side and end view of cheek halyard block. Two sets needed for jib and mainsail. They are placed at foot of mast, one on each side, using common bolts. Below: Shroud tang. Three are needed placed well up on the mast. Also useful if a diamond stay is needed. Lip is filed to fit prongs of cable socket at bottom of page.

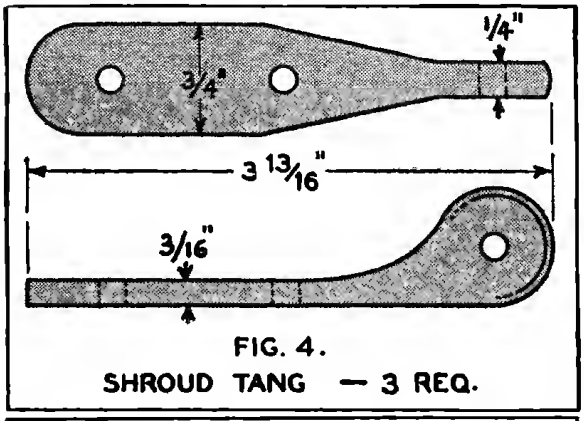

FIG. 4.
SHROUD TANG — 3 REQ.

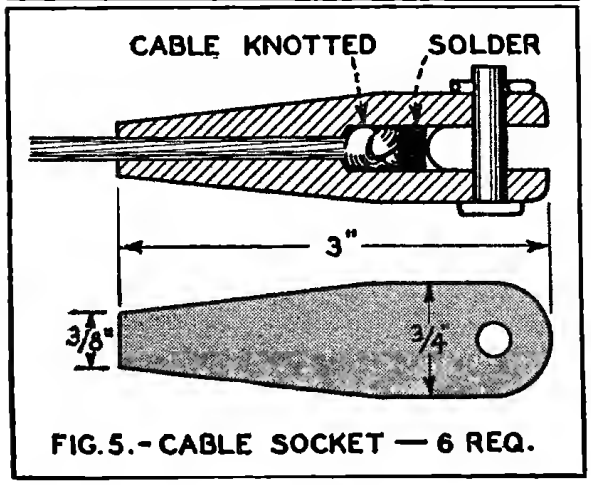

FIG. 5. - CABLE SOCKET — 6 REQ.

GENERALLY, the first department in which the average sailboat builder thinks he can economize, is in the brass fittings. He comes to this conclusion after a hasty perusal of a boat supply house manual informs him that he will need at least twenty-five dollars for ordinary fittings. By the time his boat is ready for fittings, his construction budget has shrunk considerably.

It is therefore no occasion for wonderment that so many well-built boats are floated with clumsy, ugly, dull accessories instead of the more conventional marine fixtures.

We, too, faced this same problem but our boat was far too beautiful to be trimmed with any but the brightest brass. We decided to make our own.

Our patterns were cut from red gum scrap which we had left from the centerboard trunk. We cut them out carefully, sanded them down well, and gave them two coats of shellac to ease the task of the foundry man. For four dollars we had over eight pounds of brass cast at a local pump manufacturing company.

We cut ¼-in. brass rods for bolts and threaded them so that plumber's acorn nuts would fit. These were obtained at the hardware store for a few cents and enhanced the appearance of our work.

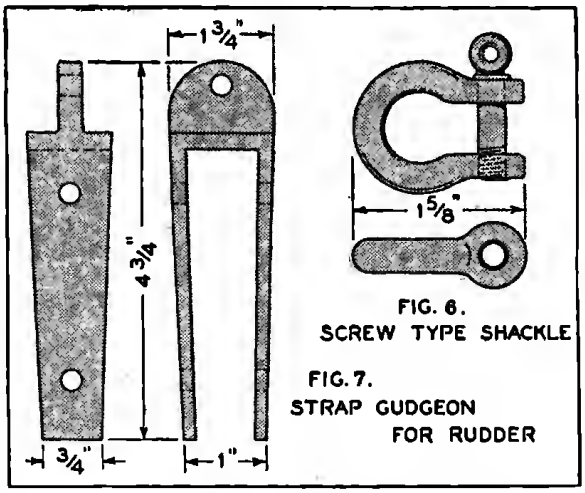

FIG. 6.
SCREW TYPE SHACKLE

FIG. 7.
STRAP GUDGEON
FOR RUDDER

Cable socket, left, showing how cable is sweated in with molten solder. Six of these are needed, one at the end of each stay. Above, Fig. 6., screw type shackle. Very convenient fitting used at head of mainsail, and at head and tack of jib. Three are necessary but extra ones may come in handy. Fig. 7 shows strap gudgeon for rudder. This arrangement provides for a long bolt for the rudder to turn on. When properly installed, rudder cannot float away as sometimes happens when pintles are used.

FITTINGS

In figure 3, you will see that you need two pulley sheaves. The patterns are made without a rope groove, which is later turned into the brass casting. Three bolts, passing through the mast, hold both cheek blocks in place.

When making the cable socket pattern, do not cut the slot for the shroud tang. This will have to be cut into the brass by hand later. The backstay wire fits into one end at A in figure 5 and is knotted in the larger hole at B. The hole is then sweated full of solder. This makes an exceptionally strong cable end.

The shackle is to be cast without the pin, of course. The pin is a threaded piece of rod flattened on one end so that no tools are necessary when the sails are taken off the tracks.

Remember to have an extra pair of strap gudgeons made. Some one at the dock is bound to drop his rudder overboard this season and if it isn't you, you may be able to sell a pair at a profit. Most inland hardware dealers allow their marine stock to deplete sadly after the first spring rush and you may have a little difficulty in getting another pair immediately.

The sliding gooseneck is a very practical affair and keeps our sail hanging beautifully. It is not as complicated as it looks, incidentally. It consists of two angles which support a ⅝-in. brass rod, two plates which are fastened to the boom, and a sliding block which allows the boom to pivot freely in two directions. The grommet in the tack of the mainsail is held in the groove of this block by a pin.

Most difficult of all fittings was the combination bow plate and forestay anchorage but the results were well worth the efforts. The mooring rope passes through the one inch hole at B and is fastened to a cleat halfway back to the mast on the deck. The cable socket of the forestay fits over prong C in figure 10. Two screws from the top into the deck and two from the front into the steam, hold it in place. The screw at A also catches the cutwater which covers the front of the stem.

After finishing, you can have all of the fittings chrome-plated, if you prefer.

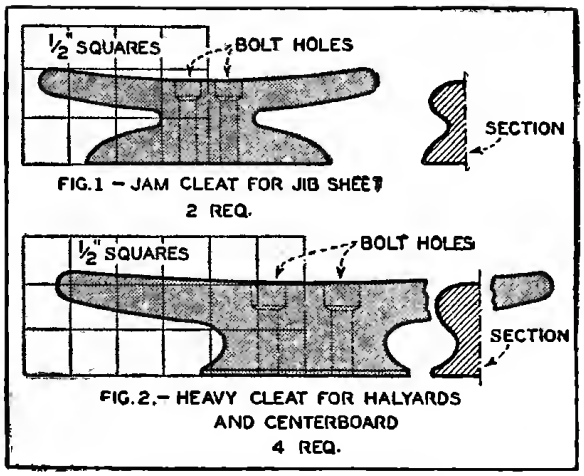

Figs. 1 and 2 above show jam cleat for jib sheet (two needed) and heavy cleats for halyards and centerboard sheet. Also for mooring cleat. Four required. Below, Fig. 8: With this sliding gooseneck your mainsail will always hang perfectly. It is made up of several small parts and assembled as shown. The angle piece (A) may have to be bent slightly to meet contour of mast. This angle, placed on forward side of the mast will also make an excellent spinnaker eyeplate. Fig. 9 shows top view of gooseneck. Below, left, is combination bow and fore stay plate.

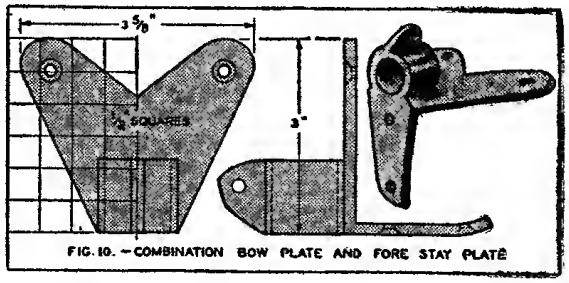

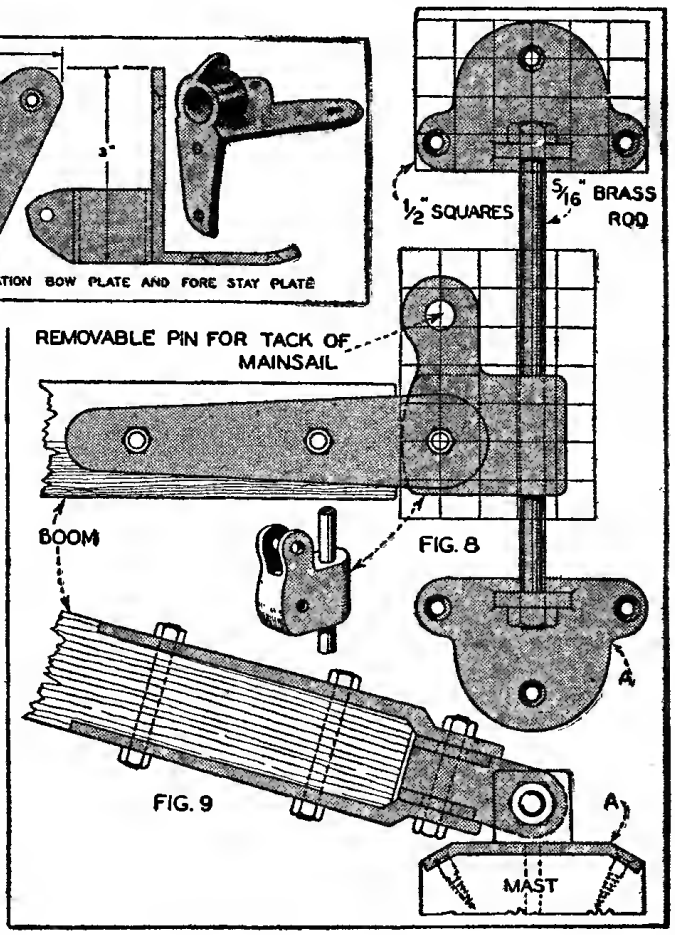

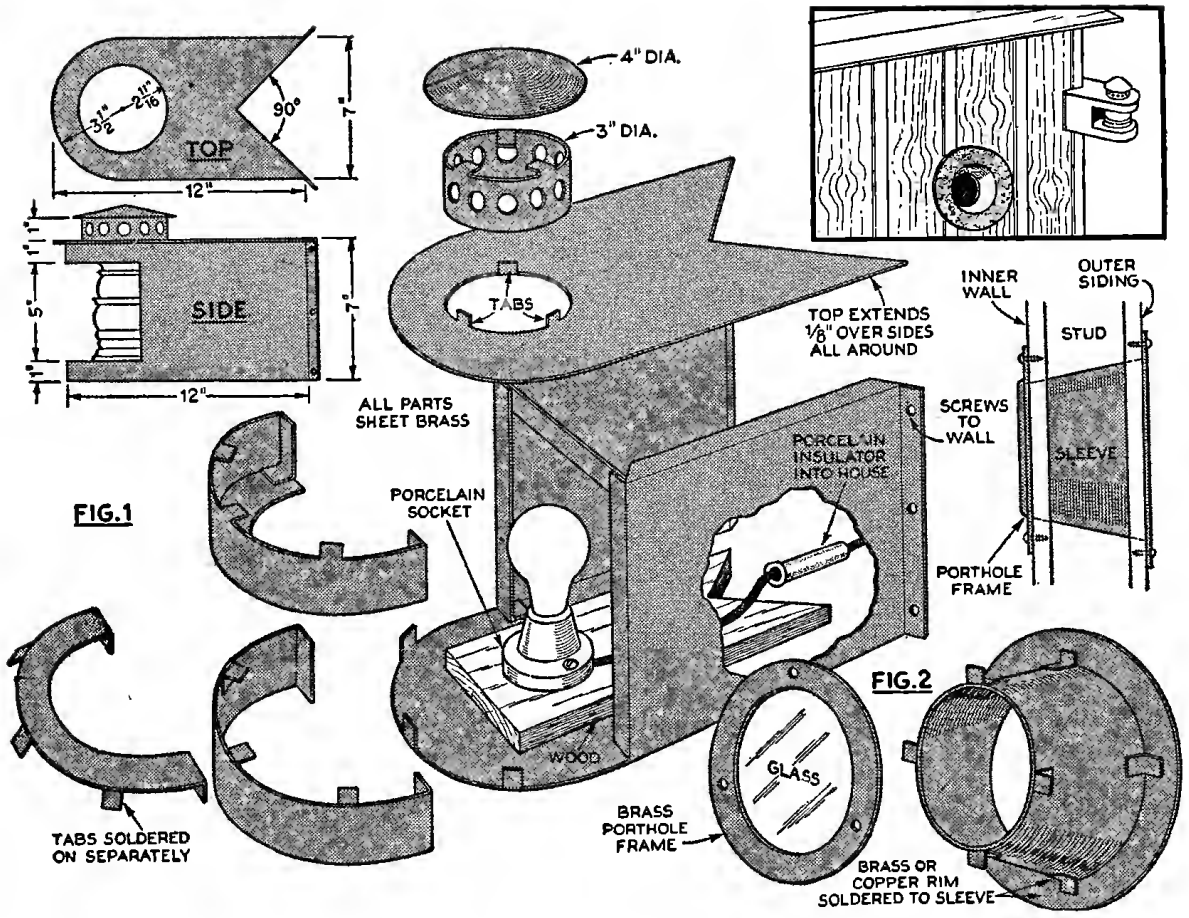

FIG. 1

FIG. 2

Marine Lamp for Beach Cottage

(Photo of finished lamp on page 80)

THIS novel lantern for the beach cottage is very simply made of sheet brass, copper or even of galvanized iron and painted to match the trim of the house. It is entirely a tin-snip and soldering job, well within the range of the amateur. If electricity is not available it can easily be rigged for a kerosene lamp.

Construction details are illustrated in Fig. 1, above. The main body is cut from a single sheet and soldered and bent as shown, with a porcelain socket mounted on a wood block screwed or nailed to the bottom. The curved members are soldered to the body by means of tabs, which can be separate strips soldered on.

A marine-type globe to slip over the light bulb can be obtained from a yacht outfitting store or supply house. It is advisable, of course, to buy the globe first and to cut the metal parts to fit accurately. The advantage of having the light located on a corner of the house is that it illuminates both sides.

To carry out the marine idea in a beach cottage even further, a row of neat portholes, made as shown in Fig. 2, is very effective. This design is for a house with double walls; that is, with inside sealed with knotty pine or wallboard. The tapered sleeve permits full light in a thick wall of this nature, and at the same time tends to prevent water from rolling in. For single cottage walls, such as board-and-batten construction, no tapered sleeve is required, but the glass disc should be fitted with a cork or rubber gasket to keep out rain.—*Hi Sibley.*

Featured Next Month

The March issue of MECHANIX ILLUSTRATED will contain a real treat for model fans—a gas powered midget racing car. This car, the *MI Whirlwind,* differs radically from the conventional miniature racer in that it is driven from the rear by an airplane propeller instead of the usual wheel-gear drive. The result is more perfect streamlining, less road resistance and truly flashing speed. You'll want to build this racer, so be sure to watch for your March number.

Two-Toned BRACELET is profit project

HANDYMEN and craftsmen without power tools who want to make sparetime profits will find this two-toned wood bracelet an excellent project. One chap with extra time on his hands made and sold more than 100 of them at practically no cost and at a price of from $.75 to $1.50 each, depending upon the kind of materials used. Colored plastics brought the higher prices, for the material cost a little and was slightly harder to finish. Those of the walnut-maple composition like the one shown in the accompanying drawing gave nearly all profit. Besides the small amount of wood needed, two short lengths of rubber elastic and filler and lacquer were the only other materials needed.

Here's how. Cut a number of blocks of both maple and walnut ¼-inch thick, ⅝ or $\frac{9}{16}$-inch wide and ¾-inch long. Smooth the edges and bottom of each block on a sheet of No. 000 sandpaper. Bracelets vary a little in size, but one 2½ inches inside diameter will fit small and medium wrists. You will therefore need 10 or 12 of the pieces, 5 or 6 of each. The next step is to sand the raised design on the top of each piece. Make each edge and end the same height. With a little practice you can do this quickly and accurately.

Each block is then provided with two parallel holes $\frac{1}{16}$-inch in diameter. Each hole should penetrate each block in the same position. While you can do this by hand with a breast or hand drill, if you have a small power drill you can make a jig to insure the same hole location in each block. If these vary the blocks will not lie all in the same line when they are strung. Enlarge the holes in one end of a walnut and a maple block and then later string these so they adjoin to hide the knotted elastic. The enlarged holes need be no more than ⅛-inch in diameter and about ¼-inch deep.

Sand the ends of the blocks too, so when laid tight together in the form of a round or oval bracelet they will fit snugly together. The oval bracelet looks better and requires but a little extra sanding, particularly if you lay out an oval in heavy pencil on paper and stand the blocks upon this to see how they fit, when sanding them.

Fill the walnut with putty and stain and wipe off. Then after the filler has dried, whittle a plug for each block, push it into one

[*Continued on page* 143]

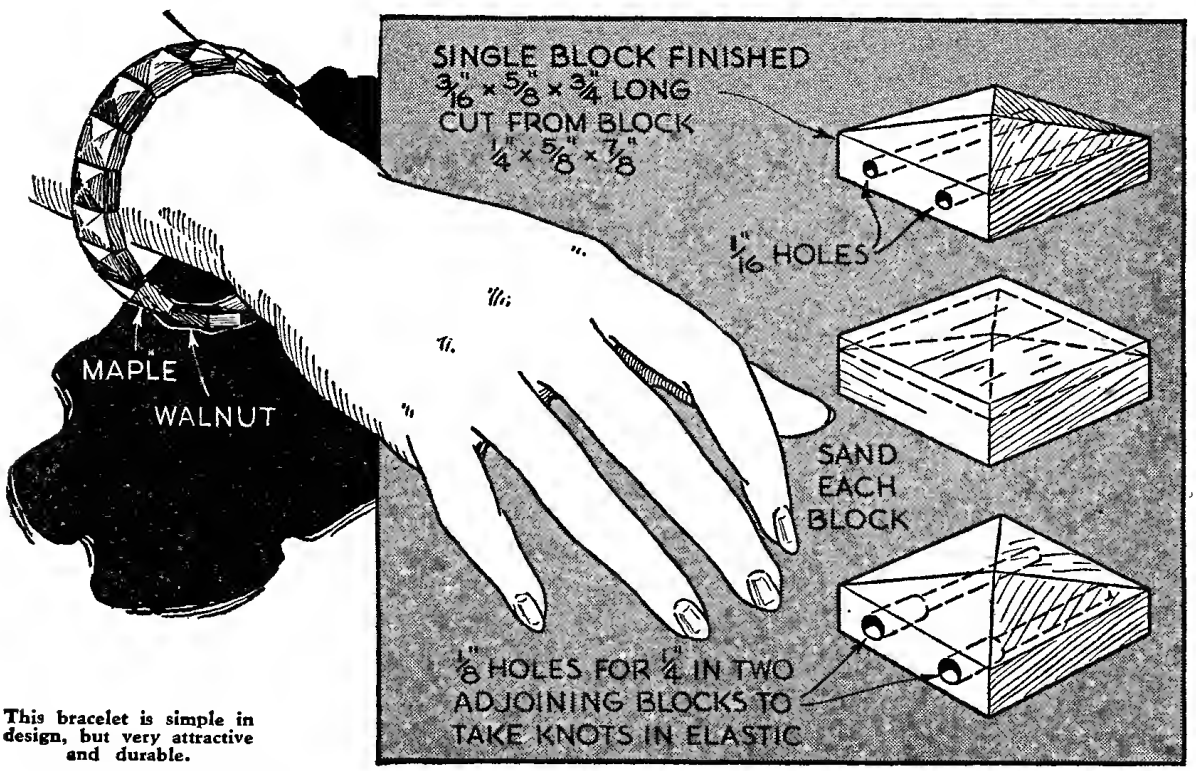
SINGLE BLOCK FINISHED
3/16" × 5/8" × 3/4" LONG
CUT FROM BLOCK
1/4" × 5/8" × 1/8"
1/16" HOLES
MAPLE
WALNUT
SAND EACH BLOCK
1/8" HOLES FOR 1/4" IN TWO ADJOINING BLOCKS TO TAKE KNOTS IN ELASTIC

This bracelet is simple in design, but very attractive and durable.

the artistic craftsman will like this

ANTELOPE ORNAMENT

THE present popularity of colorful and distinctive ornaments for home decoration offers the craftsman a chance to indulge in a measure of artistic efforts which are limited only by his ability. Some of the simplest pieces of striking line or graceful form are far more successful than more ornate and elaborate designs. The piece herein illustrated belongs in the first group and any craftsman who will have the patience to execute the piece to the best of his ability will find that the richness of the design and craftsmanship will more than make him proud of the result.

The right wood is of the utmost importance, and either African mahogany or rosewood should be used. Since the quantity is small this is not an item of expense. The thickness of this wood should be 1¼" full. On a piece 6"x12" lay out the pattern as shown below. Then saw out the outside outline on jig saw. Using a handsaw, saw the piece to the depth shown in Figure 1. With this cut made, saw out the inside outline on the jigsaw. This procedure reduces the hazard of breaking off the legs. Note that the grain of the wood is vertical. Next drill the feet at the center with a ⅛" drill to a depth of ⅜".

A half-round wood rasp is now used to remove the bulk of the full rounded edges, especially at the body and neck. The rounding and shaping of the legs must be done with a sharp knife. A certain amount of patience and caution is necessary at this point; always carve *against* the grain. A coarse sandpaper is now cut into ⅛" wide strips and holding the piece in a vise using blocks of soft wood between the jaws and the work, sand the inside of the legs. Taper these to the delicately rounded ankles. Repeat this process using a medium then fine sandpaper. Then sand the body, neck and head. Just ordinary sanding is not enough on this job. It's just like stirring paint; do it until you think that it's had plenty, then do it just that much more.

Cut four pieces of ⅛" dowel ⅜" long and glue these into the holes in the feet. Then varnish the piece with the best varnish you can get.

Next turn out the two base pieces as shown in Figure 1. Drill the larger of these in three places for wood screws and countersink them from the bottom. In turning these pieces the sanding instructions still apply, only this is easy to do on the lathe. Now rub lamp black (carbon paper will do) on the bottoms of the dowel pieces projecting from the feet. Then spot these locations on the smaller base piece, taking care to get the locations in the center. Push down on the figure and you will find

[*Continued on page* 134]

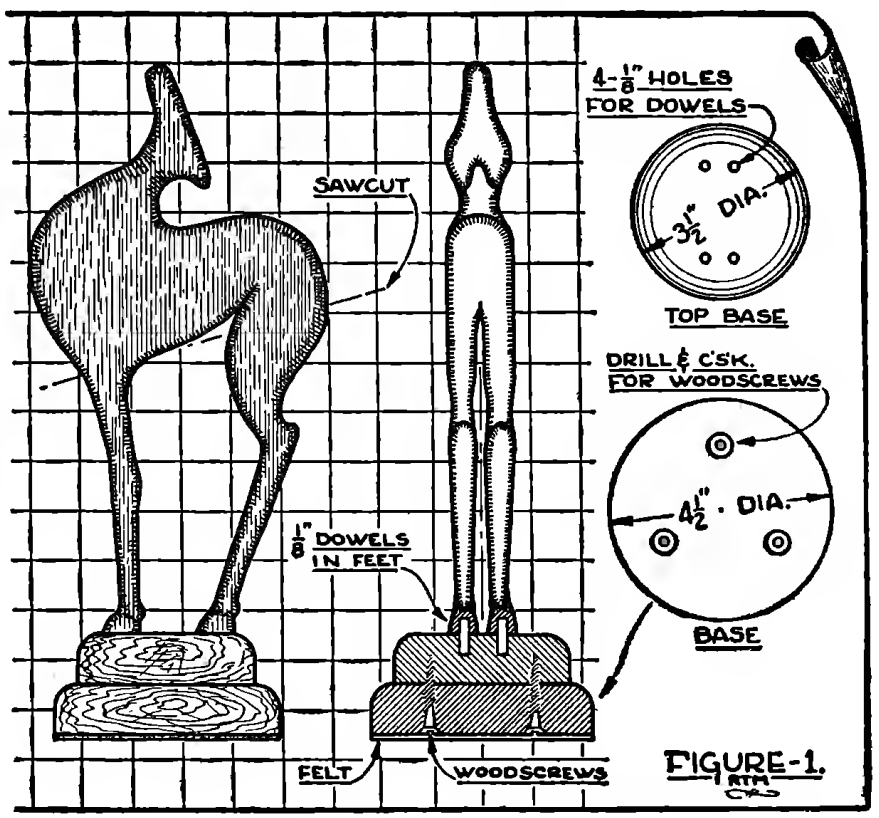

FIGURE-1.

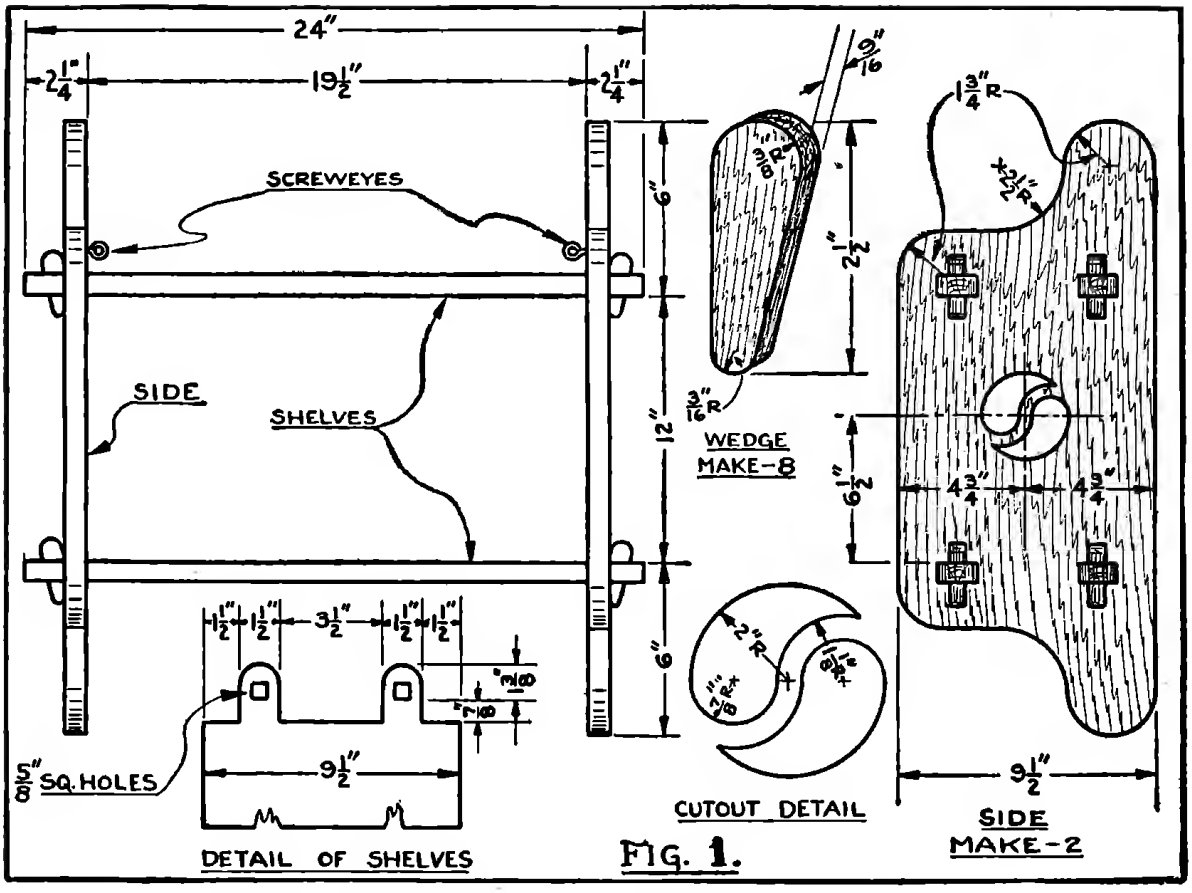

FIG. 1.

Knock-Down Portable Shelf

by Ralph T. Moore

(See page 80 for picture of finished shelves. This is an ideal one-evening project.)

HERE is an attractive shelf which is ideal for the student or traveler inasmuch as it is not only novel in appearance but it may be quickly knocked down and packed into small space and may be just as quickly reassembled. As for the antiquity of the shelf, this is inferred by the use of the wedges to hold the shelf together, and the Chinese "Yang and Yin" symbol which is used as a decorative feature in the form of a cutout.

The construction of the shelf is very simple and should require but one full evening. First cut out two pieces 1"x10"x2'-0" long and lay these out for the shelves. Then cut these out on the jig or band saw, lay out the ⅝" square holes and drill a ½" hole in the center of the squares; then, using a square rasp, shape the hole square. When both shelves are cut check them for interchangeability; in other words they must both be the same. This done, sand smooth overall.

Next cut out the two end or side pieces from a piece of wood 1"x10"x44" long. You will note that while the overall dimension of each piece is 24", some 4" of stock may be saved by layout. After laying out the shelf tongue holes and the contour, saw out on the jigsaw. Lay out the "Yang and Yin" symbol and cut out on the jigsaw. Check to see if all of the tongues fit in the rectangular holes. Next cut out eight wedges and sand these smooth, fitting these into the square holes. Assemble the shelf and insert two screweyes into the sides; these may be used to support the shelf via nails or hooks in the wall. If the assembly is satisfactory, dismantle and stain as desired. When dry wax overall; do not varnish.

As to wood, maple is suggested but poplar and pine are satisfactory and the stain should be selected according to the wood used.

An excellent stain can be made by mixing linseed oil and turpentine fifty-fifty, then adding burnt umber or raw sienna, the former for a dark stain and the latter for a light. Rub on with a cloth, wiping away excess.

HELP FOR THE

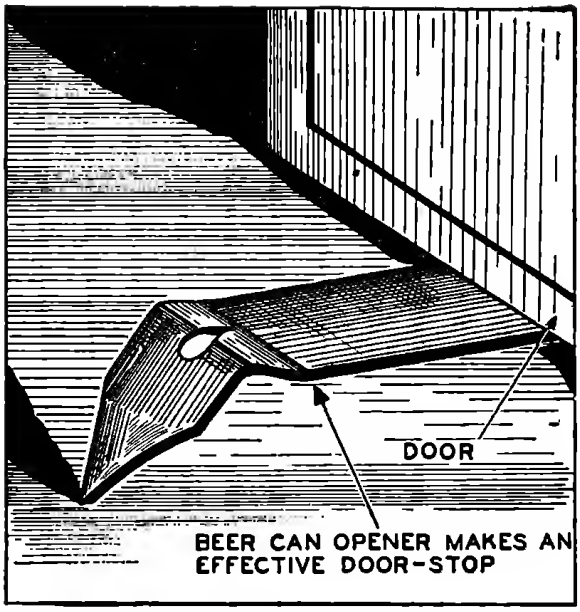

Beer Can Opener As Doorstop

A BEER can opener of the type shown makes an effective doorstop. It is especially useful where a door such as a garage door must be kept open against a strong wind. Sharp point digs in and holds firmly.—*W. S.*

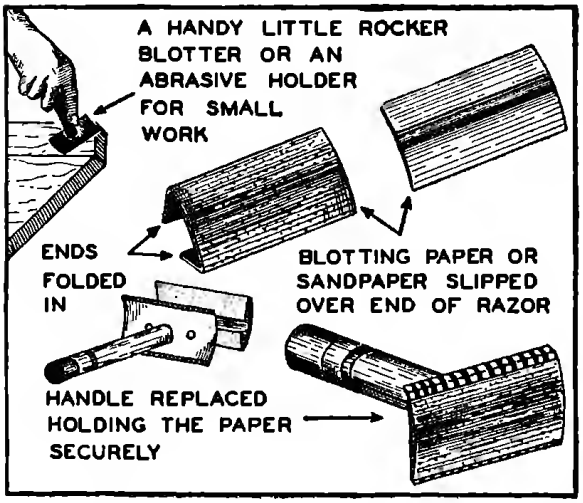
A HANDY LITTLE ROCKER BLOTTER OR AN ABRASIVE HOLDER FOR SMALL WORK
ENDS FOLDED IN
BLOTTING PAPER OR SANDPAPER SLIPPED OVER END OF RAZOR
HANDLE REPLACED HOLDING THE PAPER SECURELY

Old Razor Good Blotter Holder

DRAWING shows a handy use for one of those old safety razors that always seems to be lying around. Bottom of razor is removed and a piece of blotter wrapped around it. Handle is then screwed on and blotter is ready for use. The same stunt can be worked with sandpaper, and is particularly of value to model makers.—*A. H. W.*

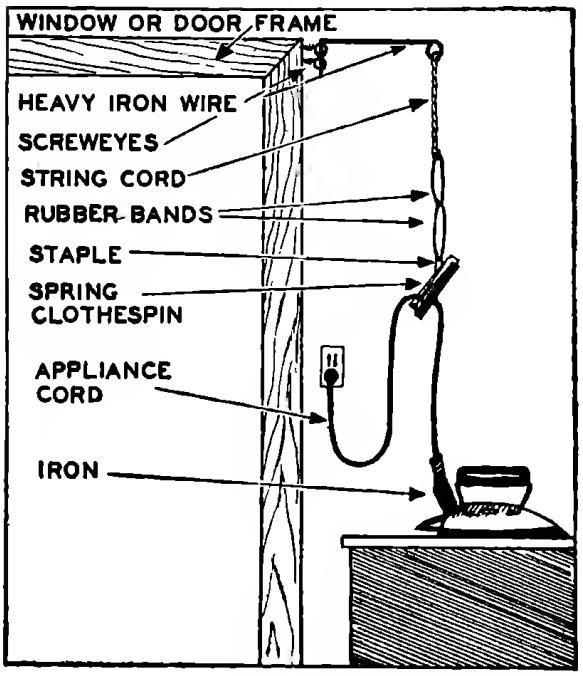

Ends Appliance Cord Deviltry

A GADGET that is useful in keeping the electric iron cord up out of the way, and prevents it from rolling and rubbing against fabrics on the ironing board, can be assembled quickly and cheaply as illustrated above.

Bend wire, attach the staple (or tiny screw eye) to one handle of the clothespin, and assemble.—*R. W.*

Cherries In Ice Cubes

WHEN ice compartments in refrigerator have begun to freeze, place a cherry in the center of each. When solid serve in iced drinks.—*D. V. H.*

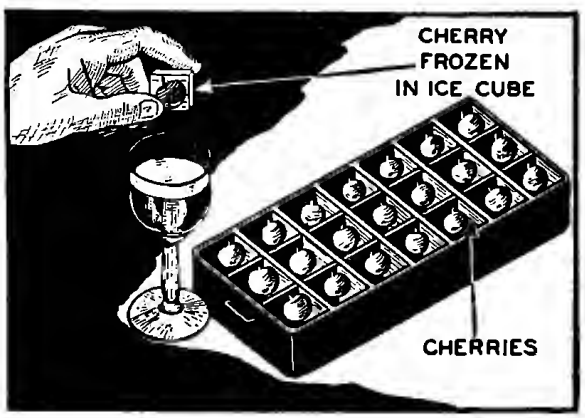

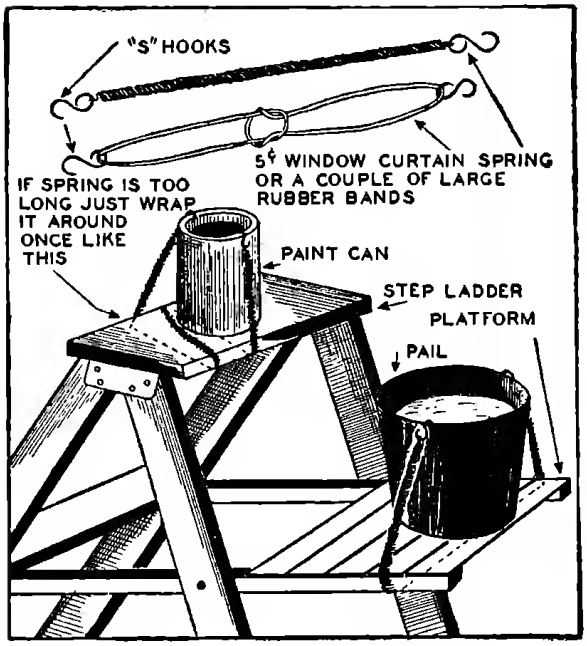
"S" HOOKS
5¢ WINDOW CURTAIN SPRING OR A COUPLE OF LARGE RUBBER BANDS
IF SPRING IS TOO LONG JUST WRAP IT AROUND ONCE LIKE THIS
PAINT CAN
STEP LADDER PLATFORM
PAIL

Keeps Paint Can Steady

A FIVE cent curtain spring, large rubber band cut from an inner tube, several rubberbands strung together, or any other elastic, can be equipped with an "S" hook at each end, and employed for the simple but useful purpose of holding a can of paint, pail of water, etc., securely atop a stepladder. When painting or washing a ceiling ladder may be moved about safely.—*A. V.*

Shade Bracket Cuts Twine

A SHADE bracket, of the type shown, will be found useful for cutting twine and heavy cord when wrapping packages. Cutting slot of the bracket can be given a knife-like edge with a few strokes of a file.—*W. S.*

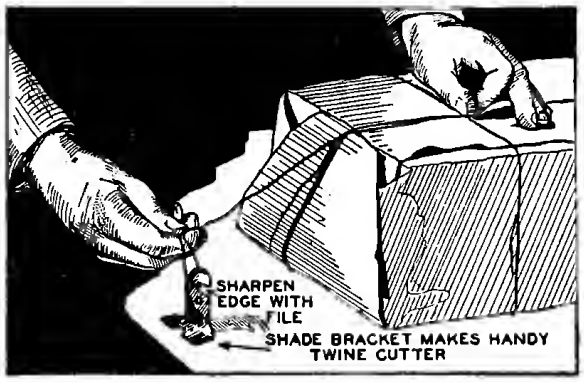

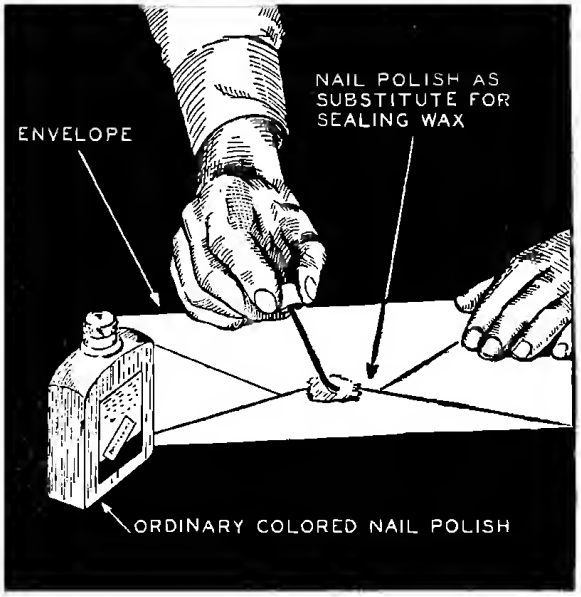

Nail Polish For Sealing Wax

LETTERS can be sealed effectively with ordinary colored nail polish. This method is much simpler than using sealing wax.—*W. S.*

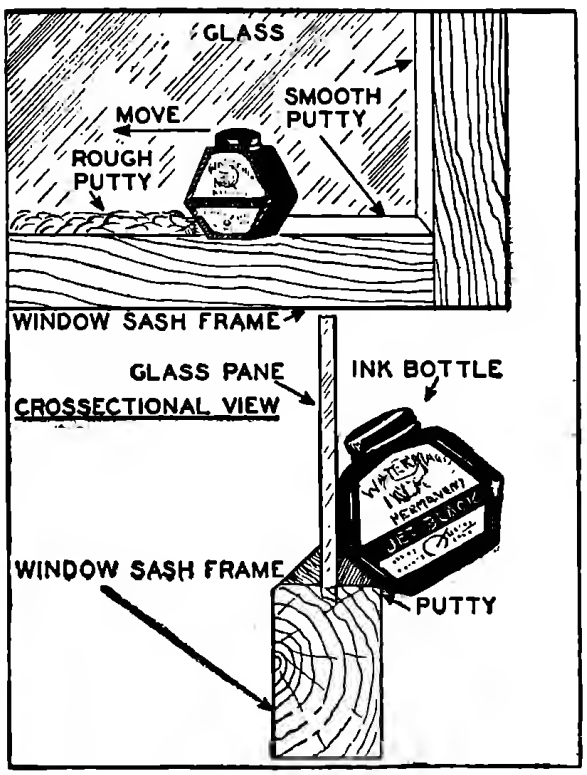

Ink Bottle To Putty Window

A POPULAR make of ink bottle of the beveled shape shown will be found handy for applying putty to a window.—*A. V.*

Hints For The Motorist

by A. H. Waychoff

Getting Equal Brake Adjustments

FOUR wheel brake adjustments can be equalized by means of a heavy spring scale such as is used for weighing ice. Tie a rope or chain around the wheel spokes at the rim, hook the scale on, and with the brake set pull until the wheel turns slightly. The wheel, of course, must be jacked up. When all four wheels show the same poundage on the scale they are all set to the same adjustment.

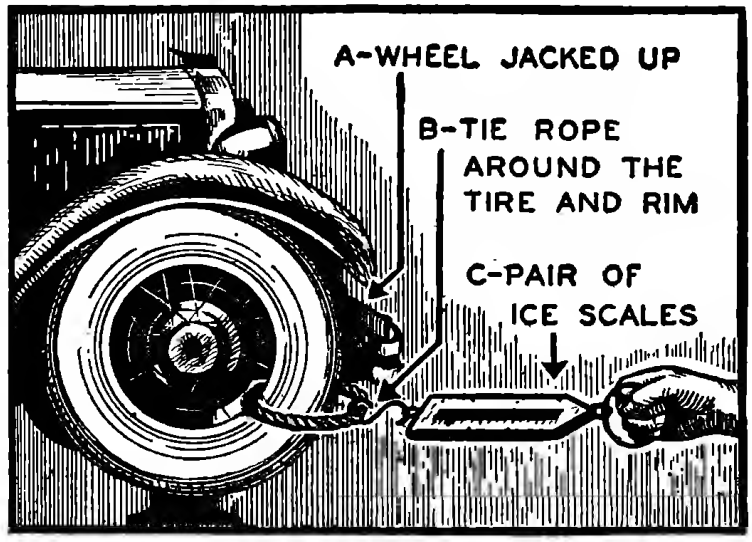

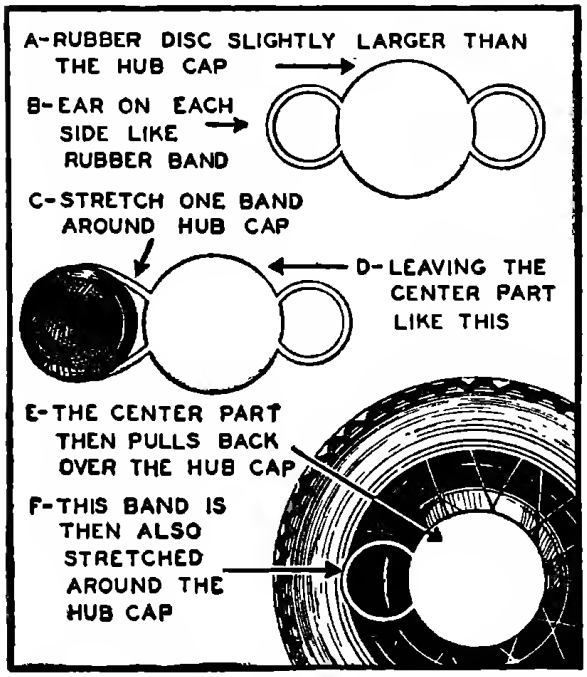
A-RUBBER DISC SLIGHTLY LARGER THAN THE HUB CAP
B-EAR ON EACH SIDE LIKE RUBBER BAND
C-STRETCH ONE BAND AROUND HUB CAP
D-LEAVING THE CENTER PART LIKE THIS
E-THE CENTER PART THEN PULLS BACK OVER THE HUB CAP
F-THIS BAND IS THEN ALSO STRETCHED AROUND THE HUB CAP

A Simple Hub Cap Protector

TO PROTECT the chromium finish of hub caps when driving over unsurfaced roads or other places where the caps are apt to be damaged, a set of these covers will be found very useful. To make them cut up an old inner tube, shaping the four covers as shown in drawing at left. The center part should be slightly larger than the diameter of the hub cap. To put on slip one loop around the cap, pull the protecting cover across then snap on the other loop.

Whitewash Shows Up Defects

TO DO a thorough job in overhauling the car all parts should be carefully checked before reassembling. Do this by giving each part, after cleaning and drying, a light coat of common whitewash made by dissolving a little lime in water. It will dry very quickly and any defects or cracks, even if invisible to the naked eye will show up as a yellow-green stain. This is caused by oil or grease in the defect, out of reach of cleaning solvent, being drawn up into the whitewash.

Money can often be saved by this method, because defective parts which might give way may be discovered and replaced before reassembling.

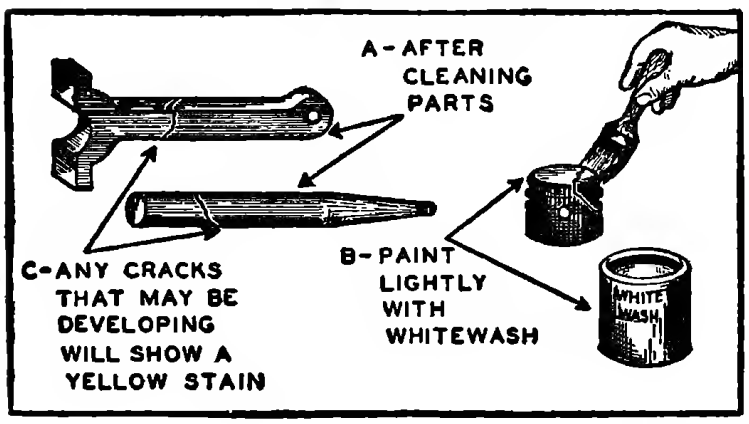
A-AFTER CLEANING PARTS
B-PAINT LIGHTLY WITH WHITEWASH
C-ANY CRACKS THAT MAY BE DEVELOPING WILL SHOW A YELLOW STAIN
WHITE WASH

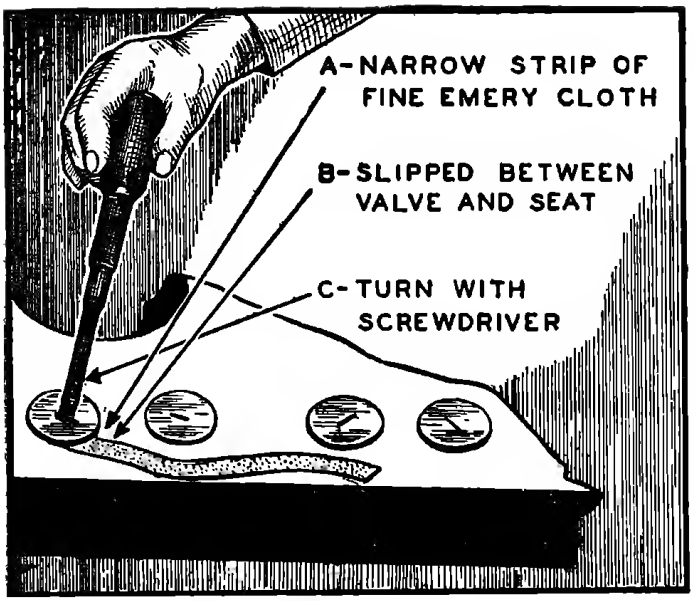

Emery Cloth Helps Surface Rough or Pitted Valves

BADLY burned or pitted valves can be smoothed very effectively in the manner illustrated at left. A strip of fine sandpaper or emery cloth not over a half-inch wide is laid on the valve seat, prying up the valve a little with a screwdriver. Turn the valve in the usual manner with screwdriver or valve grinding tool. The rough valve is nearly seated and is then easily finished up with valve grinding compound. Of course, if the valves are too far gone nothing can resurface them, and the only solution is replacement.

An Improvised "Hammer Blow" Puller

A HAMMER puller for small gears can be quickly rigged up with a half-inch bolt about a foot or so long and three or four heavy three-quarter-inch nuts. Slip the nuts on the bolt, flatten the end a little and bend down to form a hook, as shown. To use place the hook behind the gear to be pulled and slide the bunch of nuts quickly against the bolt head. Gear will quickly loosen.

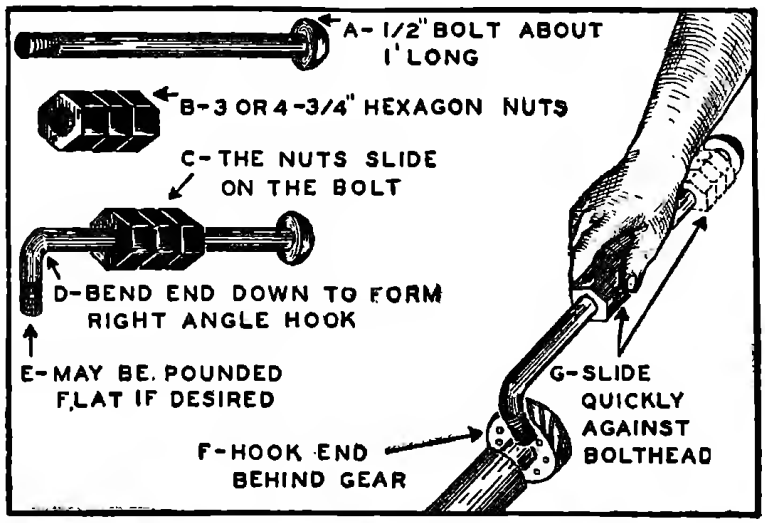
A-1/2" BOLT ABOUT 1' LONG
B-3 OR 4-3/4" HEXAGON NUTS
C-THE NUTS SLIDE ON THE BOLT
D-BEND END DOWN TO FORM RIGHT ANGLE HOOK
E-MAY BE POUNDED FLAT IF DESIRED
F-HOOK END BEHIND GEAR
G-SLIDE QUICKLY AGAINST BOLTHEAD

Dividers Make Excellent Striping Tool

AN ORDINARY ten-cent store pair of dividers or compass can be quickly converted into a tool that will enable the amateur to do professional-appearing striping. Clamp the striping brush in the pencil holder and put a little ball whittled from a small cork on the other point. Open the instrument so the cork ball can rest on an edge or moulding parallel to where the stripe must go. With the ball end acting as a guide it will draw a uniform line.

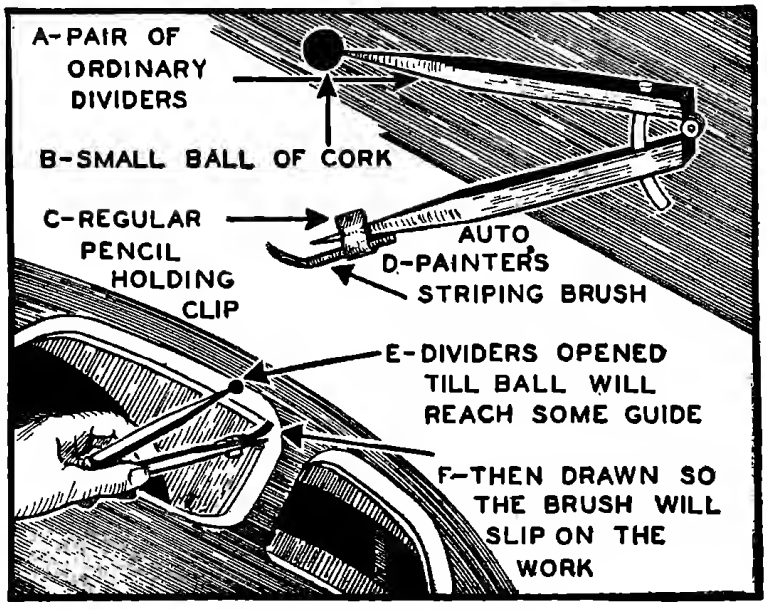
A-PAIR OF ORDINARY DIVIDERS
B-SMALL BALL OF CORK
C-REGULAR PENCIL HOLDING CLIP
D-PAINTER'S AUTO STRIPING BRUSH
E-DIVIDERS OPENED TILL BALL WILL REACH SOME GUIDE
F-THEN DRAWN SO THE BRUSH WILL SLIP ON THE WORK

Improvised Battery For Testing Earphones

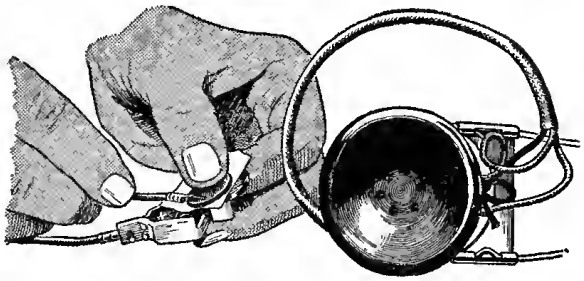

A "FLEA POWER" battery for testing radio earphones can be improvised in a few seconds by using a five-cent piece and a one-cent piece. To use the device, moisten a piece of ordinary paper with the tongue and place it between the coins. Touch one phone tip to the nickel and tap the penny with the other. If the phones are functioning, a series of clicks will be heard in it. Current is generated in this miniature "battery" because of electrolysis between the dissimilar coins in the presence of the weak acid in the saliva.

Novel Telephone Lamp

A table lamp of unique appearance can be made out of an old telephone of the upright type. The transmitter head is removed and replaced by a regular lamp socket, which is easily fastened in place by means of a short nipple and a couple of nuts. If the switch mechanism is still in order, it is wired in series with the lamp, so that the latter lights up when the earphone is picked off the hook.

The old phone switch contains several arms and contacts; examine it carefully and select one pair that closes when the hook is up and opens when it is down. The cord to the earphone is then merely a dummy, and doesn't connect to anything.

Another idea is to mount a small toggle switch in the top of the receiver, wiring this to the socket by a short length of flexible wire. Thus, the receiver can be left permanently on the hook and the lamp controlled by a flip of the switch. The shade is supported by a snap-on type clip fitting over the bulb.

Spring Holds Electric Wire

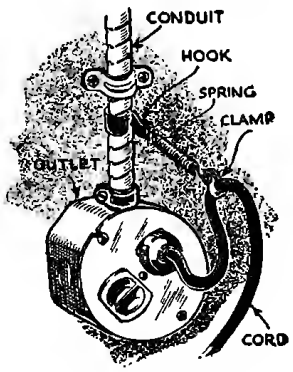

A GARAGE mechanic who is constantly using trouble lights, electric drills and other portable tools was troubled by having the plugs work out of the receptacle, usually when he was on his back or in some other awkward position. He finally overcame the nuisance by fitting the end of each flexible cord with the simple spring and clamp arrangement shown in the drawing. This takes the strain off the plug, incidentally eliminating another trouble: loosened connections to the contacts. The hook is made with a wide mouth so that it can be slipped on and off easily.

The same idea in slightly modified form can be applied to home appliances if the outlet plate is fitted with a cup hook or similar projection to which the spring can be attached.

Trouble Shooter's Cord

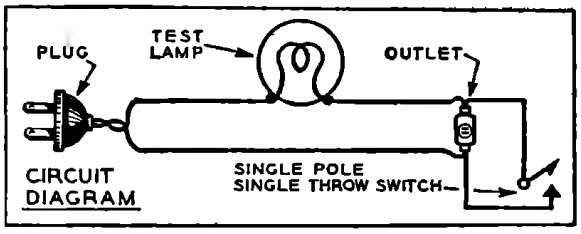

The simple circuit shown above will be found very useful for testing common electrical appliances. The parts are most conveniently mounted on a small board. The switch can be an ordinary snap or toggle type. A 25- or 40-watt lamp is used.

The device to be tested is plugged into the outlet, and the lamp then lights up in accordance with its condition. If it is "open," the lamp will not light at all; to verify this, close the switch. This shorts out the appliance under test and makes the lamp go on.

For "continuity testing," plug in pair of wires in the outlet and use these as probes; for instance, on the commutator of a generator or motor to find open windings.

BRINGING IN THE LEAD-IN

THE weakest part of most radio aerial installations is at the window where the outside wire must be brought into the house. The usual arrangement makes use of an insulated, flexible copper or brass "lead-in strip," which is satisfactory only if the window is not opened and closed very often. Invariably these strips break.

The radio fan who goes to the trouble of putting up a good aerial should also put in a lead-in better than a mere strip. The drawings on the right contain some suggestions of value.

If the radio "shack" is in the basement, a cellar window can easily be revamped, as shown in Fig. 1. The idea is to saw off part of the window (and also part of the outside screen or storm sash, if any is used), and to screw an extra strip of wood at the top of the frame. This strip should be about 1½ or 2 inches wide, which means that not more than one inch needs to be ripped off the top and bottom edges of the window. The hinges must be reset, but this takes only a few minutes. The extra wood strip now permits the use of permanent lead-in insulators. If an outside strip is also installed (to accommodate the screen or storm sash), separate the sections of each insulator and joint them by means of a piece of threaded brass rod of the right length. As many as six or eight insulators can be mounted on this extra strip, which is more than most radio experimenters ever require.

Casement-type windows require different treatment, as shown in Fig. 2. The simplest thing to do is to remove one small pane of glass altogether and to replace it by a piece of Bakelite or waterproof plywood, in which holes for lead-in insulators can be drilled. It is quite possible to drill holes in glass by means of a drill press, but this is a slow, tedious and somewhat tricky job.

With standard double-hung windows, the best arrangement is a board placed against the top of the outside window, as in Fig. 3. It should be nailed in place with thin brads, so that it won't fall when the window is opened. If the inside wires interfere with curtains or blinds, put the board on the bottom, under the inside window.

When assembling the feed-through insulators, be sure to use cork or lead washers under the nuts. Without them, the porcelain is likely to crack.

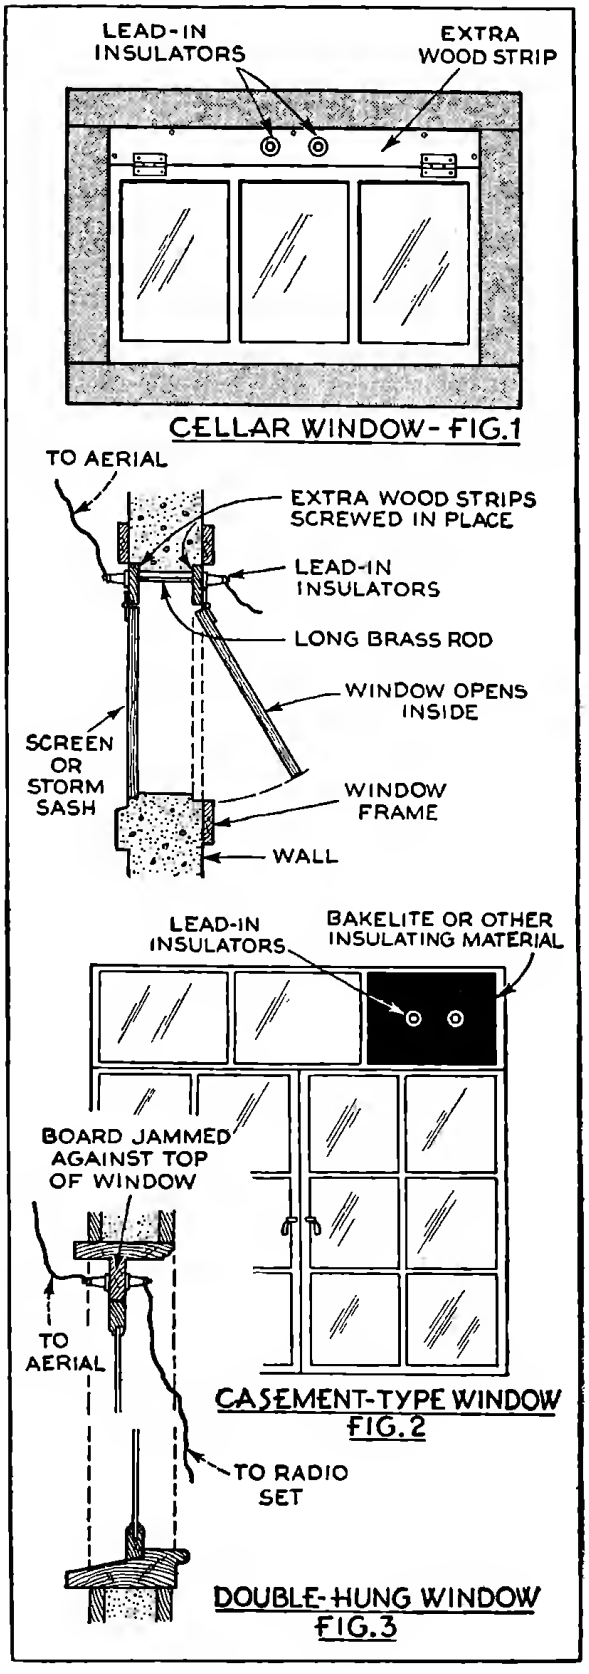

Adjustable Enlarger Table

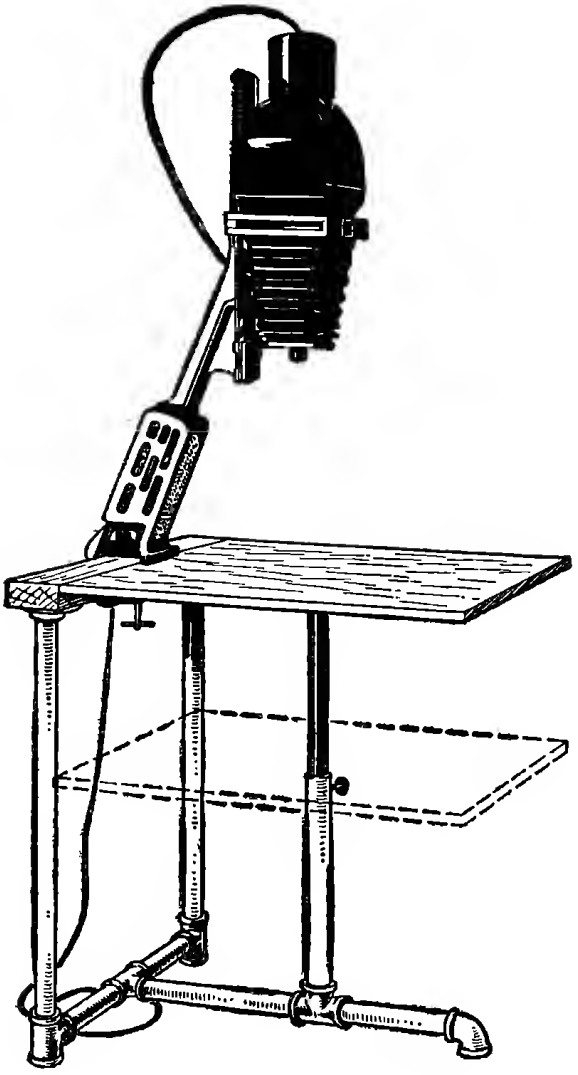

Necessary details for building this table are obvious in the drawing at left. Dimensions are given in the story.

by M. R. Mohringer

MY ENLARGER is of the autofocus type and will take up to and including 4x5 negatives. The maximum enlargement possible was 3½ diameters, and as there were times when I wanted to enlarge a small section of a negative to 11x14, I raised the lens board from the regular adjustment used with the autofocusing mechanism simply by drilling and tapping new holes about ¾-in. higher for the screws which hold the lens board. Then, by constructing the adjustable table illustrated in the accompanying photos, I have been able to increase the enlargement to 6 diameters.

The important feature of this table is the readily adjustable support for the easel, which is held at any desired height by a thumb screw. One-inch pipe was used throughout, with the exception of the standard which supports the easel board, this being 1¼-in. pipe.

By drilling and tapping this pipe about 1-in. from the top for a thumb screw the 1-in. pipe, which is fastened to the underneath side of the easel board by means of a pipe flange, can be held in any position when inserted inside the 1¼-in. pipe.

The dimensions depend upon the enlarger to be used with the table. On this one the easel board of ⅜ plywood is 24 in. square. The 2x4, which is fastened to pipe flanges with 1-in. wood screws, is 24 in. long. The two upright pipes to which the 2x4 is fastened are 20 in. apart, center to center. The height of the table is 30 in. over all. The 1¼-in. and the 1-in. pipe, forming the support for the easel board, should be the same length, and should be such that the 1-in. pipe extends into the 1¼-in. pipe about 2½ or 3 in. when the easel board is extended flush with the top of the enlarger support.

Anyone wishing to construct this table will probably find it desirable to have a plumber cut and thread the various lengths of pipe. The cost for the pipe, including cutting, threading, and assembling for the table shown was $4.00. A machinist drilled and tapped the hole for the thumb screw for 15c. All fittings should be screwed as tightly as possible, thereby making the table extremely rigid.

A coat of aluminum paint gives a very suitable finish to the job.

Photography With a Wide Open Lens

If you want to take brilliant pictures with the subject in sharp focus and the background blurred out, try shooting with the lens wide open. Photography under this condition, with suitable subjects, is more capable of providing rich, brilliant pictures than a lens with its diaphragm stopped down. A lens working at large apertures catches and fixes the center of interest and obscures distracting background, thus making every detail, every highlight and shadow in the face clear and lifelike.

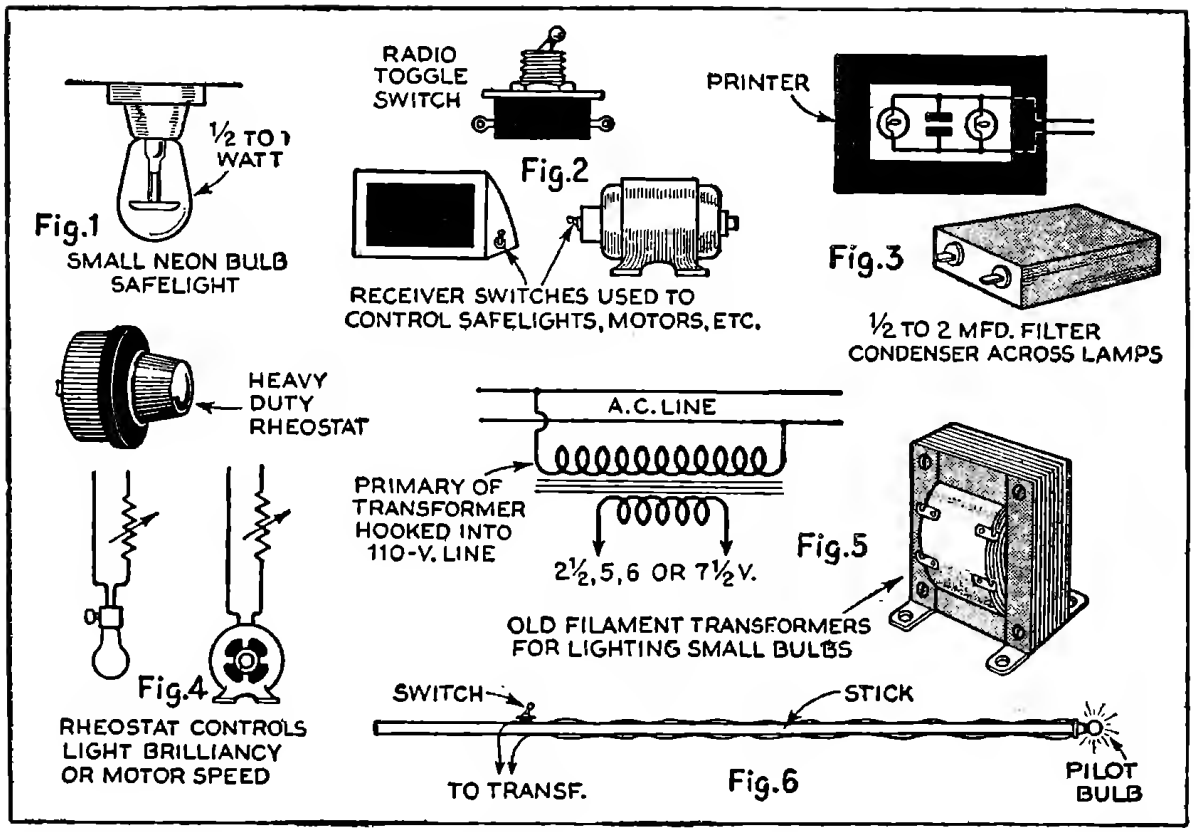

Darkroom Uses For Radio Parts

THE writer happens to be both a radio amateur and a bit of a photographer and in his darkroom has found good use for several discarded radio parts. No attempt is made to enumerate all photographic uses for such material; just a few are shown. Anyone similarly situated can undoubtedly think of many more.

For instance, Fig. 1 illustrates an excellent use for small neon bulbs. As orange is the usual safe-light around the darkroom, except for the ultra sensitive materials, a ½ to 1 watt neon bulb will prove perfectly safe to keep lighted at all times. This is especially true of the printing room. The operating cost is practically nothing per month, so, by keeping one burning constantly, you can enter the darkroom for momentary business without having to feel for the light switch or falling over some unseen obstruction.

Fig. 2 shows the usual a.c. switch used in old receivers. Pick up half a dozen of these. Many appliances come equipped with only a cord and plug. By putting a switch in the line at some convenient point the appliance can be controlled much more easily than by always being obliged to plug it in. They can be used on safe-lights, small washer motors, printers, etc.

Old filter and high-voltage condensers have their uses. Most printers operate on the principle of flashing on and off a bank of lights. In short exposures the after-glow may be troublesome. By placing a condenser across the lamp terminals (Fig. 3), this glow can be reduced or entirely eliminated. Old filter pack or even high-voltage blocking condensers can be utilized and any capacity from ½ to 2 mfd. will do the trick.

Filaments of the so-called "power tubes" were often controlled by heavy duty rheostats. In Fig. 4 is shown how such old rheostats can be used to control light brilliancy or motor speed. It is only necessary to cut the rheostat in series with one side of the line. Thus red lights can be dimmed, washers slowed down, etc. So long as the wattage of the light or instrument does not exceed the capacity of the rheostat, it is perfectly safe to use. Some of the better ones ran up to 75 watts capacity.

A 2½- or 5-volt filament transformer can find good use. Hook the primary into the 110-volt mains, as in Fig. 5, and then use the

[*Continued on page* 144]

AMATEUR PHOTO PUZZLERS

1. EXPOSURE IN ENLARGING

Q. Is there any set rule for increasing the time exposure in the enlarger as the size of the picture is increased?—James Lowery, Kokomo, Ind.

A. Theoretically, the exposure increases in proportion to the increase in size of the enlargement. In other words, if you find it necessary to expose a negative in the enlarger for 8 seconds, when making a 5x7 enlargement, the exposure should be increased 4 times, or to 32 seconds when making an enlargement twice the size. This is correct in theory but does not always work out in practice. The best way to determine the actual exposures necessary is to make test strips of the negative.

2. HEAT CURLS NEGATIVES

Q. What causes my negatives to buckle and curl in the enlarger and how can this condition be avoided?—L. M., Hadden Heights, N. J.

A. Negatives get hot and curl or buckle because of the heat from the enlarger bulb. This is not unusual. Most lamp housings get terrifically hot when the enlarger is used for long periods of time, and the film is thus affected. Many enlargers are perforated for ventilation. Others have fins around the outside of the lamp housing to dissipate the heat, while some even have built-in fans for cooling. When working with a conventional enlarger with no provision for heat dissipation other than the fins or holes for ventilation, it is advisable to keep down the intensity of the heat by shutting off the light immediately after making the exposure. Under no circumstances should the negative be left in the enlarger while the lamp is on for any great length of time.

3. ENLARGING LENSES

Q. I wish to enlarge negatives of several different sizes in my enlarger. What changes are necessary in my lenses—or can I use the same lens for all size negatives?—Mathew Smith, Flint, Mich.

A. It is possible to use the same focal length lens in your enlarger for several sizes of negatives. However, the size of the enlargements you will obtain will be limited. That is to say, a six-inch focal length lens will be adequate for enlarging a 3¼x4¼ negative to a reasonable size, but the same lens will only permit a limited enlargement of a half-vest pocket size negative. The smaller the negative, the shorter the focal length of the lens should be. If you are content to accept the limitations of the lens, you can use it on both small and large negatives. Keep in mind, however, that the focal length of the lens also determines the largest size negative that the lens can handle.

4. STILLS FROM MOVIES

Q. I wish to make stills from my movie film. How is it done?—Rhine Condray, Monticello, Ark.

A. Making stills from movie film is somewhat more complicated than when making them from still-camera negatives. Movie film is returned to you by the processing firm as positives ready for projection. If you made a print from this, the result would be a print with its tones in reverse. To avoid this, it is necessary to make a negative from the positive film. This is done either by projecting the positive onto a larger negative or by making a contact copy of the image onto negative film just as you make contact prints. The exposed negative is then processed in the ordinary manner and prints made as usual from the developed negative.

5. COPYING PICTURES

Q. I have some old pictures I wish to copy. When doing this, how do I tell when the pictures are in focus?—Raymond Sidel, Waco, Texas.

A. Copying should always be done with a ground-glass back camera, as focusing on a ground glass is the easiest way getting the image in focus. However, if you are obliged to use a folding camera, a make-shift ground glass arrangement is possible by removing the back of the camera and substituting a piece of ground glass in the position of the film. Focus the image, remove the glass, replace the back without moving the camera and take your picture. If the back of your camera cannot be removed, it is possible to make the copy with the aid of a front lens. In this instance, the lens is snapped in position in front of the camera lens. This allows the camera to be moved much closer to the subject. The actual distance must be carefully calibrated according to instructions included with each such lens attachment.

6. NEGATIVE PROCESSING

Q. My negatives seem to come out fogged and possibly over-exposed or over-developed. What should I do to prevent these conditions?—M. L. Hanson, Grand Meadow, Minn.

A. If your negatives are fogged, the condition occurs either in the camera or in the darkroom. If in the camera, it may be due to light leaks in your equipment or to careless insertion and removal of the film. If it occurs in the darkroom, it may be due to light leaks in the room, to an unsafe safelight or to the presence of static electricity, although the latter possibility is rather remote. Film should be kept tightly wound and loading and unloading should be done in subdued light—not in brilliant sun or electric light. The darkroom must be absolutely light-tight and the safelight must be *safe*. If your film is over-exposed, this condition is easily corrected by increasing the speed of the shutter or by stopping down the diaphragm an additional stop when taking the picture. If the negative is over-exposed, simply cut down the development time about 25 per cent and see if this is sufficient correction.

BIBLIOGRAPHY

Questions asked on this page have frequently been discussed at greater length in articles that have appeared in this magazine or in other publications published by Fawcett Publications. Hencefortb, questions will be numbered. Corresponding numbers will be given below together with references to the articles, publications and page numbers in which the particular subject has been discussed, if at all. This will enable readers to compile an extensive and valuable reference library on photographic technique not otherwise possible. The reference publications are all available from Fawcett Publications, Inc., Greenwich, Conn., for 50 cents each, postpaid.

1. **Exposure in Enlarging. See "Enlarging is Easy," page 104, Good Photography No. 2.**
2. **Heat Curls Negatives. See "Enlarging Without Heat," page 101, Good Photography No. 2.**
3. **No reference.**
4. **No reference.**
5. **Copying Pictures. See "How to Make Copies," page 124, Photography Handbook No. 4.**
6. **Negative Processing. See "Keeping Cool at 90," page 58, Photography Handbook No. 3. Also see "Technique of Speed Processing," page 74, Photography Handbook No. 4. Also see "Tank Developing Simplified," page 57, Good Photography No. 1.**

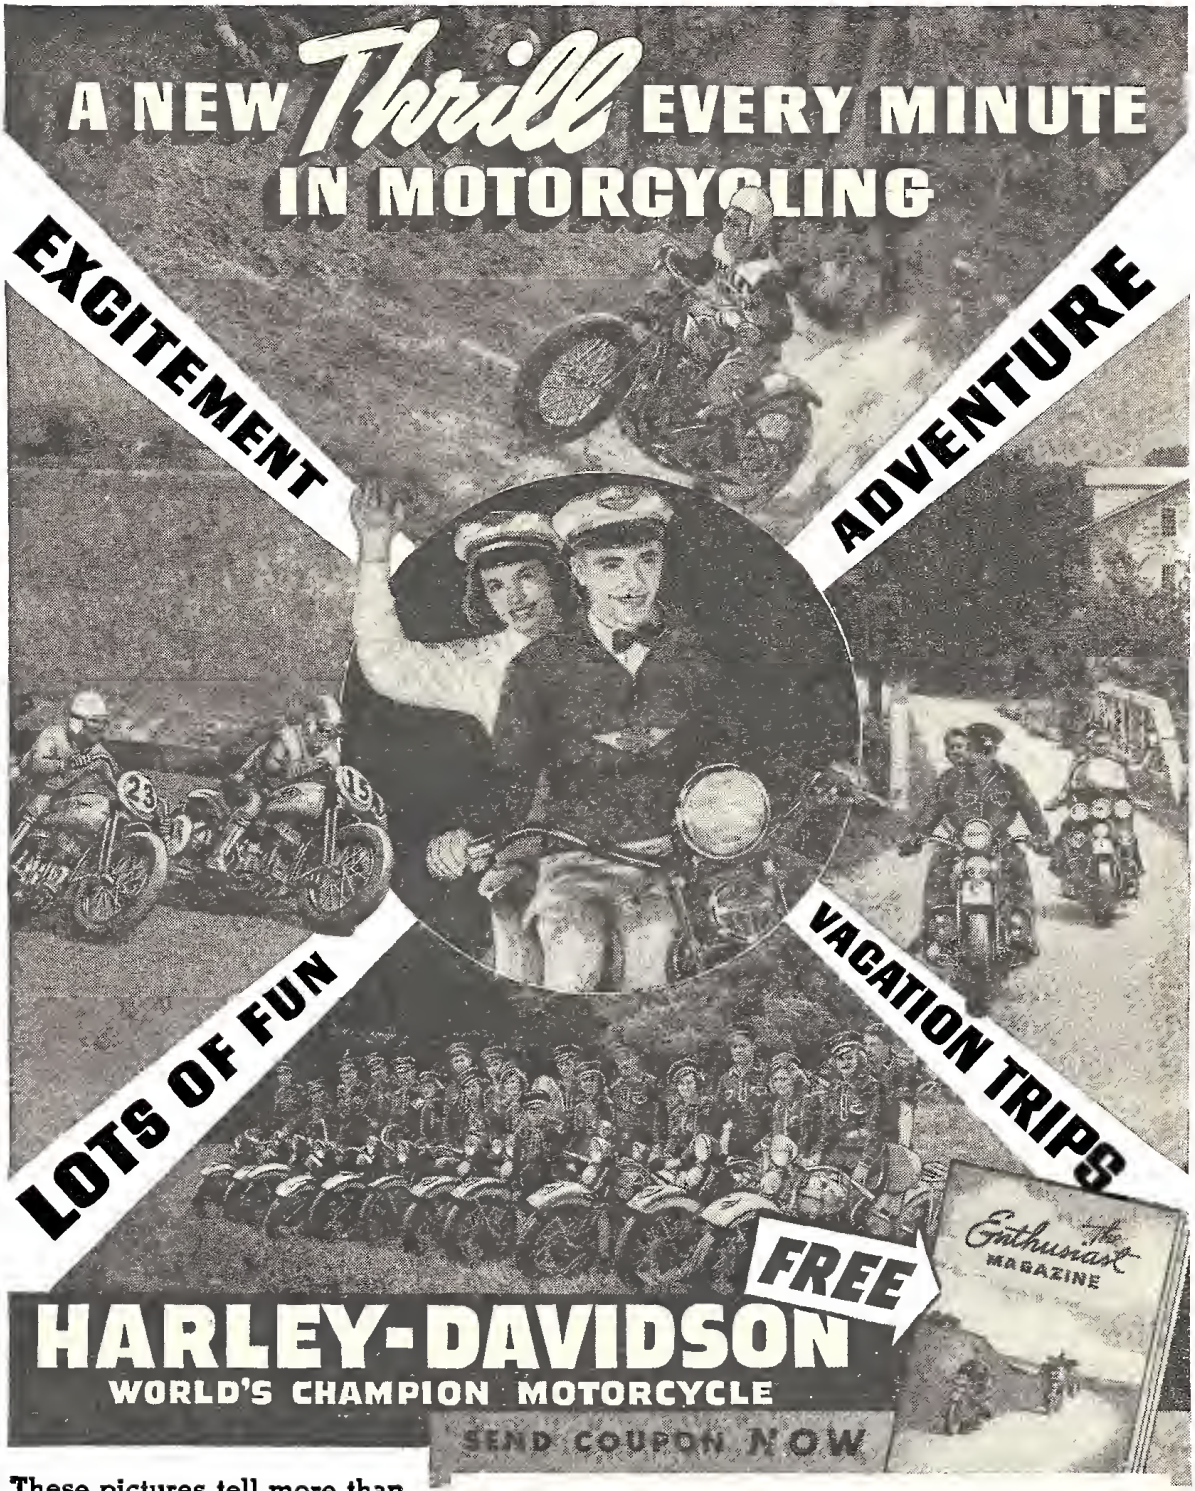

These pictures tell more than a thousand words the countless thrills and pleasures of motorcycling. See your Harley-Davidson dealer. Get the complete story of this great sport—right in the saddle of a new 1940 model!

HARLEY-DAVIDSON MOTOR CO., Dept. MI, Milwaukee, Wis.

Send FREE copy of big 24-page "Enthusiast" motorcycling magazine filled with pictures and stories of thrilling motorcycle doings. Also literature on new 1940 Harley-Davidsons. Stamp is enclosed for mailing cost.

Name.....

Address.....

How To Bowl

[*Continued from page* 41]

other pins for a strike. Thus, ten perfect hits with a very fast ball will not result in as many strikes as ten identical hits with a somewhat slower ball.

All bowlers should strive to perfect a uniform delivery, throwing the ball with the same speed for every shot. You can accomplish this with least trouble if you throw a straight ball. A person throwing a hook ball will find his ball curving less sharply on a slippery or "fast" alley. His temptation will be to slow down his delivery, throw a slower ball and give the slower moving sphere an opportunity to create the necessary friction between alley surface and ball to produce his familiar hook. This change of pace should be avoided, unless proper results can not be obtained in any other way. First the bowler should select a spot a bit closer to the center of the alley than is his custom to bowl over, and see if he can get the usual results from this new spot. In the case of a slow alley, one which has a rougher surface than average, the hook will be wider than the bowler expects because of increased friction between the alley and the spinning ball. In that case a spot somewhat to the right of the ball's usual path should be selected. By selecting a spot slightly to the right or left of the usual path, for a fast or slow alley, you do not have to change your point of delivery at the foul line. While some teachers recommend moving the delivery point closer to the center of the alley on a slow surface, and closer to the right-hand gutter on fast surface, I can not subscribe. To do this you must disrupt all the habits you have developed in laying the ball down at the precise same spot on the foul line. To my way of thinking, it is much better to select a new spot to bowl over, but retain your usual delivery spot.

The average bowler builds up his score more on spares, cleaning the alley of all the remaining pins on his second shot, than he does on strikes. Of course you must concentrate on strikes, and you will not be a high score bowler until you can get six or seven strikes in every game; but neither will you be a high or even average bowler, unless you can pick up spares regularly.

Simply stated, my rule for throwing for spares is this: Every spare leave you may have, with one exception, should be made from your original position with the ball placed on the same spot at the foul line as you place it for a strike. The exception is when you have one, two or three pins standing in the right-hand corner of the alley, that is, the six, nine, or ten pin, one of them, two of them or all three.

In this case you move to the extreme left side of the alley, delivering the ball six or eight inches in from the left side of the alley.

In every instance, select a spot when bowling for spares as you do when bowling for strikes, and bowl for that spot, not the pins. Remember, throw the same ball, straight or hook, for your spares that you throw for a strike.

When you have selected a ball that fits, have mastered your footwork and armswing, and have learned to throw a uniform, accurate ball, you will have everything necessary for a finished bowler except a bowling disposition. To be a really good bowler, you must have this, a combination of coolness, courage, ability to concentrate and smile under adverse circumstances.

When the game gets tight, take your time, keep relaxed and concentrate on doing your best. Be sure you are set before delivery, have clearly in mind what you intend to do and accept the results cheerfully. Nothing upsets your opponent more than to see that nothing upsets you.

The bowling alley shown is one of the newer alleys, a result of the tremendous increase in the popularity of the sport with both men and women.

Ahoy, Boat Lovers!

The 1940 Edition of HOW TO BUILD 20 BOATS is Out!

Fifth in the famous Fawcett series of boat books, this handsome 50-cent volume is the best, most complete, and most useful of its kind ever published.

Every plan in the 1940 HOW TO BUILD 20 BOATS has been supervised by a naval architect, assuring you of absolute accuracy. The boats themselves have been built and tested. Every plan is as simple and easy to follow as expert editorial judgment can possibly make it. Anyone who works with tools will find plans in the 1940 HOW TO BUILD 20 BOATS from which he can construct a sea-worthy pleasure craft at a fraction of the normal cost.

This new volume features boats built of waterproof plywood, the most important development in the boat building field in a century. This material is particularly suited to amateur construction because it is easy to work with and eliminates much tedious planking and caulking.

Here is a partial list of contents:

BARBARA Q—14 ft. utility outboard. Fairly fast with a low power motor, safe and sturdy. The ideal family boat. Seats six.

PLOVER—15 ft. auxiliary day sailing knockabout. Round bottom; carries an air cooled inboard engine.

JITTERBUG—17 ft. V-bottom cabin sloop. One of the best boats of its kind ever offered to the amateur builder. Can be powered with an outboard motor if desired.

PIRATE TOO—17½ ft. flattie cruiser designed along the lines of a sharpie. Very simple construction. Sails and air-cooled inboard auxiliary.

SEA ROVER—24 ft. round bottom cabin sloop. A real deep water boat, with fast lines and fin keel.

MIDGE—7½ ft. plywood pram dinghy.

And many others.

In addition, the 1940 HOW TO BUILD 20 BOATS features valuable articles of general interest to boat lovers; a home-made sextant for the beginner in navigation; a thrilling article on a voyage to Tahiti made in "Tahiti," built from Fawcett boat book plans, and many others.

No boat lover can afford to be without the 1940 HOW TO BUILD 20 BOATS. If you've always wanted to own a boat, or if you have one now—this is your book! And it's only 50 cents, postpaid!

How to Build 20
BOATS
50 Cents
A FAWCETT PUBLICATION
No. 5
COMPLETE PLANS AND INSTRUCTIONS FOR BUILDING 20 TESTED BOATS
Including: Plywood Auxiliary Sloop • Hunting Skiffs • Speed Boat
Utility Outboard • Day Sailers • 30-Ft. Seagoing Ketch • Motor Dory
Rowboats • Sailing Surfboard • "Kynoe" • 36-Inch Model Racing Sloop
PLUS ARTICLES OF VALUE AND INTEREST TO BOAT OWNERS

CUT OUT AND MAIL TODAY!

Fawcett Publications, Inc., MI-2
Greenwich, Conn.

Please send me, post paid, a copy of the 1940 HOW TO BUILD 20 BOATS. Enclosed find 50 cents in check, money order or stamps. (No coins.)

NAME .....

ADDRESS .....

CITY..... STATE.....

(NOTE: If you do not wish to cut this page, you may order by letter. Be sure to write name and address clearly, and enclose remittance.)

Your Job—Radio Servicing

[*Continued from page 47*]

Broadcast and public-address amplifier operating is a natural step forward for trained radio technicians. Here is a typical amplifier control panel: the one used at the New York World's Fair.

correspondence schools. Both offer their own advantages. Send for descriptive catalogues of their courses and decide for yourself how well they fit your needs. In the final analysis, no school is going to make you a better service man than you are temperamentally equipped to be.

Residence schools are those in which you report for instruction every day at a building equipped with every variety of radio and electrical apparatus. You take down sets, reassemble them, under guidance of an instructor, asking questions as you go, listening to his explanations. Residence training usually is completed in from three to six months.

Correspondence courses offer expertly prepared lessons which come by mail. Light experimental apparatus may be included. Your lessons are graded by expert instructors, mistakes pointed out, doubtful points cleared up. If you have the ability to learn from books, correspondence courses give you a thorough background and you can complete the course at your own pace, the average time being around a year.

Whatever type of training suits you, it will be expected that you have a grade school education, and high school training is practically a requisite if you expect to advance into the better paying jobs in the field.

And now that vital pocketbook question—"How much can I make?"

The income chart on page 119 will give you average wages in various classifications. Medium income for experienced men employed by others is $30 to $35 a week, with $40 to $50 representing high wages, and $18 a week a fair average for beginners—and you're likely to be classed as a beginner for at least two years if you "learn as you go." Many radio service men are self-trained—one-fourth of them, according to one estimate.

If you gross $70 a week in your own servicing business, your net income will be about $35. Who gets the other $35? Old Man Overhead. You can't keep him off your payroll. Sales of parts, accessories, sets or other side-lines will naturally boost your income. You will charge your customers about $1.50 an hour for service and your average call will be $3.

We have already mentioned initiative as a quality of the independent service man. Here's what you can do when you're on your own. Go after antenna business during the moving season, contacting newcomers to your community. Sell yourself to radio stores and jobbers as a reliable man who can be depended to take over service calls which are usually headaches to them. Put in stock for an electrical goods store. Go after business on the new portable sets in rural areas which don't have power lines.

It is fine to start out with enough capital to last a year, but not a great deal of cash is needed to get started. You can gradually expand. Go after public address installations, renting the equipment as well as installing it. Look into the income possibilities of a sound truck—one of those traveling loudspeakers which shout the reasons why you should buy your red flannels at Dinglekofer's

or elect Oscar Doakes justice of the peace. If you're smart enough to learn radio thoroughly—and basically all that is required is good intelligence, not genius, plus willingness to work like a dog—you have so many ways of turning an honest dollar that only a few of the possibilities can be suggested in this article. Here are some of the more important answers to the question, "Where do I go from here?"

AVIATION. It's no secret that right now the aviation industry is booming—but not for unskilled laborers. The skilled radio service man will find aviation doors thrown open to him, for radio is as indispensable to the modern airplane as a propeller.

CIVIL SERVICE. Uncle Sam, state, and city governments need radio service men for the great variety of radio apparatus used in running the country. The universal use of radio police cars is merely one instance of how indispensable radio has become to government. Examinations to fill radio positions are held periodically; make inquiries at your city hall. One advantage of civil service is that salary and job tenure is secure.

MOTION PICTURES. Every modern movie is built around sound. If you aspire to be another Clark Gable you probably won't get a Hollywood job; if you are an expert on sound equipment, your chances are excellent. But much closer home you will have a chance to keep the sound projection equipment of your local theater in working order.

SALESMAN. The best and highest paid radio salesmen are those who have had service training. Customers can't stump them with embarrassing questions. Employers prefer them.

EXECUTIVE. Scratch an executive in the radio and electrical field and you'll probably find a man

[*Continued on page* 120]

Income Chart for RADIO SERVICE MAN

These figures represent *average* incomes for various classifications of radio work, and these may vary considerably according to local conditions. Lower wages are more likely to be encountered than the higher ones listed; this chart gives the national range of income.

Beginners (first couple of years) The national minimum figure of the wage and hours act (30 cents an hour) represents the lowest level of income to be expected.	per week	$18
Experienced service men, medium wage range	per week	$30 to $35
Service men with much experience, specialists, in urban communities, high wage range	per week	$40 to $50
Jobbers' field service men	per week	$30 to $60
Civil Service—U. S. Government positions radio service classifications	per year	$1800 to $2800
Aircraft radio service men	per month	$125 to $175
Average charge made for labor if you are in business for yourself	per hour	$1.50

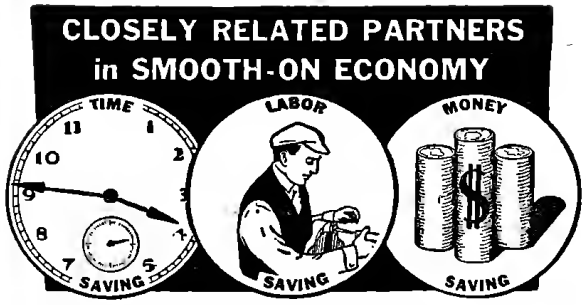

Only repairs with Smooth-On No. 1 combine these advantages:—Quick completion and readiness for service, easy application, and very low cost.

Smooth-On No. 1 offers everything that is best for patching cracked pressure parts, stopping joint and seam leaks on water, steam and gas lines, tightening loose screw threads or parts, anchoring bolts, studs and screws in masonry, etc. A perfect hold is assured and the tightness is permanent even under extreme pressures, temperature changes and vibration.



Stopping leak at a joint



Anchoring shelf in masonry

If you would become expert on household and automobile repair work, want to know what Smooth-On has done and can do, and if you would prepare to make mere trifles out of many otherwise troublesome jobs, get the free Smooth-On Handbook and follow its instructions. The working diagrams cover all sorts of applications, and make choice of correct procedure easy.



Write for FREE BOOK

Buy Smooth-On No. 1 in 7-oz. or 1 or 5-lb. cans from your hardware store or from us.

SMOOTH-ON MFG. CO., Dept. 69
574 Communipaw Ave.,
Jersey City, N. J.

Please send Smooth-On Repair Book.

Name.....

Address .....

2-10.....



Do it with SMOOTH-ON

Your Job—Radio Servicing

[*Continued from page* 119]

who has done his stint as operator or service man. It is only natural that the men who direct the industry should have risen from the ranks, for executives in this field need more than ordinary business training. They need technical knowledge as well. Not every good service man can become a high-paid executive, however, for the same reason that not every eligible citizen can become President. The supply is greater than the demand. The higher the job you aspire to, the more important do personality qualities become in proportion to technical knowledge.

Radio Operator. The job of operator—marine, aviation, commercial—has so many interesting possibilities that it requires fully as extended a discussion as radio servicing. In this article we can only say that operating is a logical "next step" for the service man. David Sarnoff, head of R.C.A., began his radio career as an operator.

Field Service Man. Jobbers and manufacturers need service men to contact their retail outlets, "trouble shooting," smoothing out technical troubles.

How are you going to get started as a radio service man? Very likely you can earn a little money while you're learning. You will have some friends and acquaintances whose sets need attention.

They in turn will know other prospects. The value of these contacts is not so much the few dollars worth of service work you may get from them immediately, as the fact that you can use them as a selling point if you find it difficult to persuade some local radio man to hire you.

Radio dealers have to employ service men—from one to six of them, according to size of the establishment. Persistency will usually get you a job as a beginner, for your wages won't be high and a willing helper on whom the "dirty work" can be foisted is a useful hand around any establishment.

Once you have a toehold in the field, your progress can take any of the turns suggested above as the most common routes of advancement. You can continue indefinitely in the lower wage brackets—plenty do; there's an eternal oversupply of workers who have learned just enough to get by—or you can dig into correspondence courses, enroll in a school, get radio books out of the library, tap sources of information everywhere available, and really go places.

Men who get to the top in radio aren't necessarily any smarter than those stuck in low-pay jobs. But they *get smarter* by keeping their learning caps always on. The fellow who keeps learning is never the one who bellyaches about being

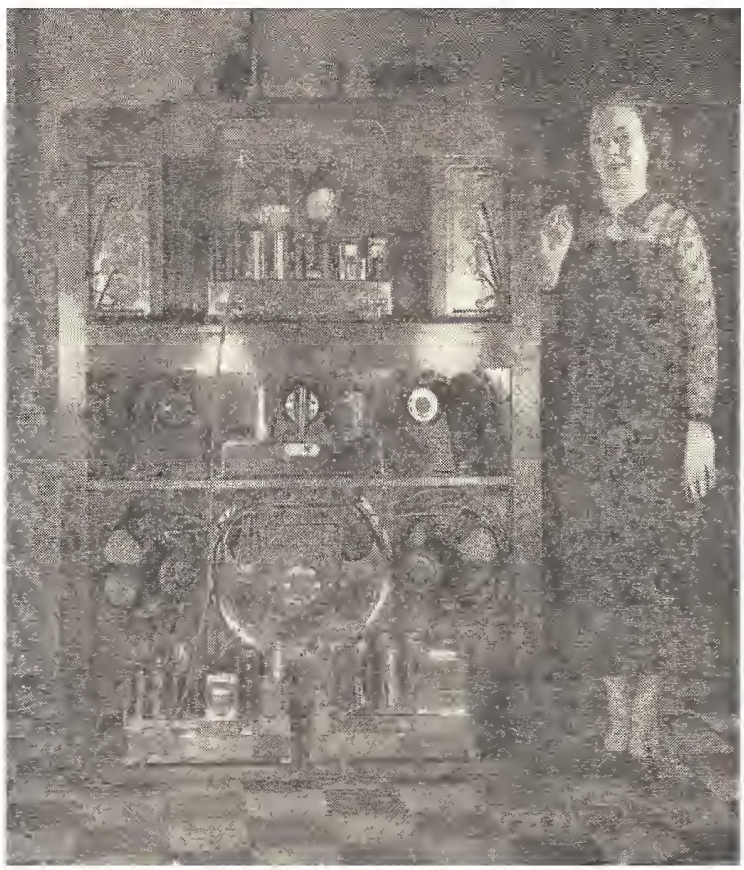

With 37 tubes and six loud speakers, the largest of which is 18 inches in diameter, this collossus of radio is nearly five feet tall and weighs 475 pounds. It was brought out about four years ago by a Cincinnati manufacturer, and while it was never produced in any quantities, it indicates how large and complicated a radio receiver can be. In spite of its imposing appearance, there is nothing about this monster that will frighten a competent service man. Because of this complex feature of modern receivers, service men are able to obtain good fees for their work.

unable to make a living because the profession is overcrowded.

Since so many radio service men are in business for themselves, union affiliation looms less large as a problem than in many other fields. Factories and the larger sales units are most likely to be organized by the electrical workers.

One last word about the effects of technical progress on the radio service man's job. Prediction is perilous, but this much can safely be said: technological advancement won't wipe out the service man's job, but will almost certainly make it more important, increasing opportunities.

One of these days the long-heralded television set in every living room will actually start to arrive, and the radio service man will have another string to his versatile bow. Right now the experiments of Professor Edwin Howard Armstrong, inventor of the superheterodyne circuit, threaten to make present sound receiving sets obsolete. His new system of static-proof frequency-modulation radio transmission has every technician watching to see what comes of it.

Yes, it's a fascinating, dynamic, challenging and combustible field if there ever was one, this radio business. That is, if you happen to be cut out for it. You are the only person in the world who can decide that. If you haven't already taken the radio service man's vocational test on page 47, do so now. It will help you arrive at an honest answer.

Next month Mr. Cooley will discuss the profession of photography. This occupation has aroused the interest of many young men, and many young women, too, because the country is now so thoroughly camera conscious. Don't miss the March issue containing this article.

BALANCE SHEET

Advantages and disadvantages of the Radio Service Man's Occupation

ASSETS	LIABILITIES
Good chance to start business of your own	Requires high intelligence, a grade school and preferably high school education
Inventions and improvements will increase rather than eliminate service man's work	Opportunities greater in thickly settled communities; if you live in small town service work will probably have to be combined with related income sources
Semi-professional occupation which has high rating in community	Close work may be hard on weak eyes
Only small investment needed to get started in own business	Hours often long, irregular, with many night calls
Work demands skill rather than strength or endurance	Somewhat seasonal though not markedly so
Excellent training schools and correspondence courses available	Competition is fairly keen
Takes you into homes, gives excellent chances for friendly contact with people of importance in your community	Demands combination of mechanical aptitude and knack of getting along with people, for maximum success
Work is excellent springboard to higher, better-paid jobs	
Technical training gives versatile equipment for making a living	
Combines indoor with outdoor work	

See AMERICA'S Most AMAZING RADIO VALUES!

Dealers, Servicemen, Amateurs, P.A. men, Builders save money on every radio need! This famous catalog brings you Everything in Radio at lowest prices!—sets, parts, kits, tubes, tools, ham gear, P.A. systems, phonographs, recorders, test equipment—over 15,000 items! Save money on every order! FREE—SEND COUPON!

Choose From 60 Models!

A set for every need at great money-saving prices—60 different models, 4 to 12 tubes, with newest features, "Air-Magnet", etc., at lowest prices—with biggest values in electric phonographs, phono-radios, etc. All shown in ALLIED's big 1940 catalog—Send coupon!



REVOLUTIONARY NEW P. A. SYSTEMS!

Remarkable values in P.A. systems for every need—14 sensational new systems, "Economy," "Standard," "De Luxe," 6 to 70 watts. Also latest accessories, complete recording equipment, etc., at lowest prices—in ALLIED's Catalog. New Time Payment plan!



Build your own radio receiver, transmitter, transceiver—learn while you build! Dozens of new, low-cost, easy-to-build Kits are shown in ALLIED'S Catalog. We supply Free, matched Parts Lists to build any circuit. Learn Radio quickly—enjoy this great hobby! ALLIED helps you learn easily!

Send for RADIO BUILDERS' HANDBOOK—A beginner's book on radio; tells how to select circuits, read diagrams, build sets, etc. Easy to understand. Packed with helpful data. New revised edition. Only ----------10¢

Order by coupon below.

ALLIED RADIO

CATALOG FREE Send this Coupon!

833 W. Jackson Blvd., Dept. 6-B-0
Chicago, Illinois

☐ RUSH your FREE 1940 Radio Supply Catalog.

☐ ENCLOSED find 10c. Send your NEW Radio Builders' Handbook.

Name .....

Address .....

City..... State.....

Riding The Frozen Freight

[*Continued from page 70*]

what might very easily have been grim tragedy.

Tractor freighting has become big winter business in Northern Canada. Rich gold fields of recent years have become rich gold mines far from a railway or highway. Airplanes can bring in a certain amount of equipment, and is naturally expensive transportation. In summer, boats can take in machinery a certain distance, since there are many portages. But in winter most of the heavy freight is moved when the ice is thick. Then tractor freight trains start out from railway stations. Most tractor trains consist of a tractor pulling three or four sleds, but up to a dozen sleds have been pulled by tractors.

The tractor road leads over frozen lake, over land where a portage is necessary. Virgin bush is cut down to make a path for the tractor trains. On well-used runs to big mines, telephone lines are strung along lake shores and over portages, so that tractor drivers can be in touch with their base in case of accident.

The tractors have revolutionized bush freighting. Where formerly horses were used, in recent years diesel engined tractors have pulled the freight more quickly and more economically. An idea of how much these tractors can pull in winter time through the lake-studded bushlands can be had from 30,000 tons taken into the Red Lake area of Northern Ontario alone, last winter, and the 10,000 tons taken into the God's Lake area in central Manitoba.

Young men run the tractor trains, a tough breed of lads who can take the weather, the cold and the dangers in stride. They work usually on a six-hour stretch, sleep six hours in the caboose, and go on for another six hours. They sit on well-padded seats, but even so, the bumps over rough ice hummocks, over rocks and fallen trees are felt. Sometimes seasickness is experienced by new hands. This bumping and jolting counteracts a tendency to fall asleep caused by the monotonous hum of the Diesel engines. They have to make their engine repairs in temperatures that often hover for weeks around 40 below zero. Frequently they are storm-bound when high winds and heavy snowdrifts stop traffic. When they are unable to go ahead due to engine trouble, they lay huge signs of wood on the snow for pilots who fly overhead to see. When they are making good time, airplanes flying overhead report their progress to their base.

When there is a heavy snow, sometimes a tractor fitted with a snowplough clears part of the bush trail. There was one heavy fall of snow which appeared heavy enough to stop tractor traffic. Tractors sink into soft snow, because of their heavy weight. And this was a five-foot fall of soft snow. There were hundreds of tons of supplies to deliver to the mines. The tractor operators built flanges on the caterpillar tracks of their tractors, and so the five-ton tractors with their heavy loads were able to travel over the deep snow in safety.

When a big order, anywhere up to 1,000 tons of freight, has to be delivered to one mine, then the tractors go on schedule, with little loss of time. Sometimes the roads beaten out by the tractors are then iced to make the sled runners slip along more smoothly. Downhill trips call in a special operating technique, and the whole crew works so that the weight of the loaded sled on a smooth run will not send the tractor hurtling down. Sometimes on such swings, swift-flowing rivers do not freeze over solidly enough to allow the tractor and 50 tons of load to navigate the ice in safety. Then a bridge has to be built, strong enough to hold the load.

Greatest hazard of the tractor trains is slush that forms, not on top of the snow, but below the snow. The lakes are covered with 20 to 30 inches of snow. That amount of snow is heavy. So are

[*Continued on page 124*]

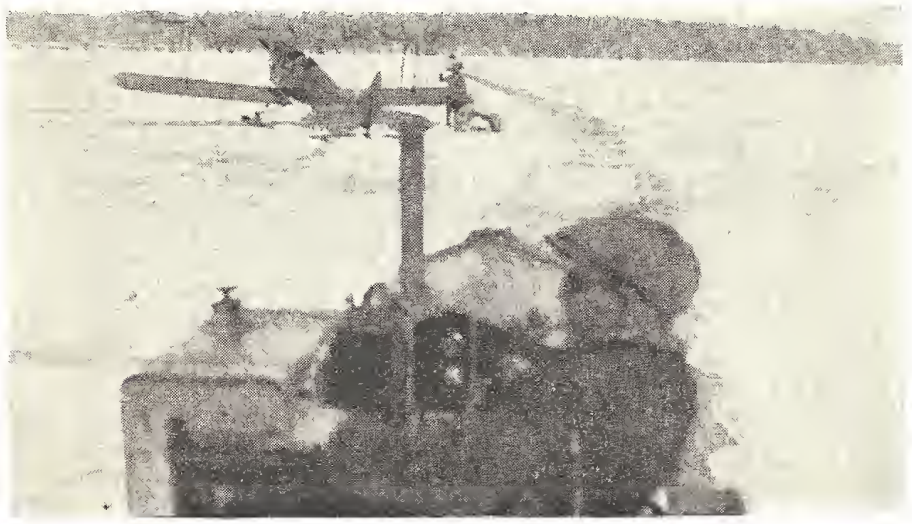

Two methods of transportation meet on the frozen surface of a northern Canadian lake. In some cases the plane can get to places the tractor can't, and other times the tractor is able to get to places where an airplane can't land.

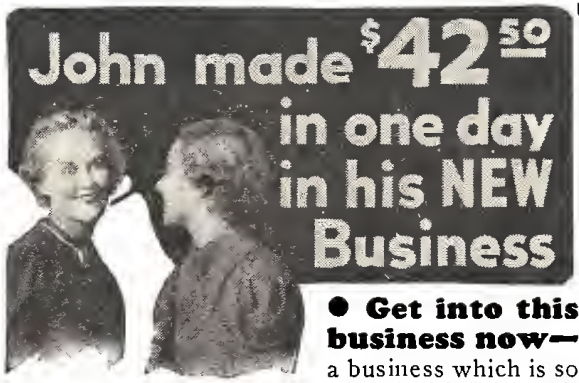

● **Get into this business now—** a business which is so new that it is practically without competition. This alone should enable you to make really BIG MONEY. Hotels, homes, clubs, office buildings offer tremendous possibilities. Our new DETERGER washes upholstered furniture electrically right in your customer's home, with a new soapless soap whipped into DRY suds. *No liquid touches the fabric*, therefore the furniture is ready for use soon after cleaning. We have helped hundreds of men get into business for themselves with our automatic equipment. The U. S. Government and many of the world's largest hotels use our machines.

Make Money the FIRST DAY

The DETERGER is ready to run when you receive it, so you can take in big profits the very first day. We want an honest, ambitious man in every locality. If you are that man we will help you get started for yourself in a business with tremendous possibilities.

No Rent to Pay You don't have to rent a shop. You don't have to hire a building, for you do the work right in your customer's home. You save the expense of carting furniture back and forth to a central plant; the owner's home is your workshop.

J. S. Corson says

"I cleaned seven living room sets and fourteen chairs, as well as twenty-five automobile interiors the very first month and cleared $279.50." Berger Hanson wrote "My investment in your DETERGER was the wisest I have ever made. It is my most valued asset." Barrett says: "Made $28.00 in eight hours, on another job made $11.00 in two and one-half hours." Alex Gulkin's business expanded so fast that he already has SIX DETERGERS making money for him.

No liquid touches the fabric when cleaning with the DETERGER.

Pay as you Earn

Only a limited amount of money is needed for a down payment. The balance you send on easy terms. Most men find it possible to make far more than the cost of the machine before the payments come due. **Every machine is fully GUARANTEED** and satisfied customers send their friends to you.

Book sent FREE

Write today for copy of our booklet, "Your Own Business, Profits Instead of Wages." Let us tell you how easy it is to get started in a year around business where you are your own Boss and can stop worrying about just a job. Write today—**NOW**. There is no obligation.

VON SCHRADER MFG. CO., 542Pl., Racine, Wis.

VON SCHRADER MFG. CO., 542 Pl., Racine, Wis.

Send me (without obligation) your free booklet telling me how I can own my own business and become financially independent and how I can pay for the DETERGER on easy terms.

Name .....

Address .....

City..... State.....

FULL SIZE, CUT-TO-SHAPE
BOAT PATTERNS
blueprints, and complete specifications

Newest designs by naval architect. Cruisers, runabouts, sloops, snipe, outboard boats, sailing canoe (Kayak), etc., 7½ ft.-38 ft. Surprisingly low prices. Rush 10c (coin) for latest illust. catalog. Send $1 for "HOW TO BUILD BOATS" book, postpaid.

Cleveland Boat Blueprint Co., Station A-23, Cleveland, O.

WANT A GOOD PAY JOB?

Trained Tool and Die Makers, precision machinists, automatic screw machine men earn as much as $50-$60 per week. Learn by actual work at one of America's best equipped shops. Training supervised by experts. Day-Evening classes. Enter anytime. Low fee, employment help. Write NOW for booklet "Practical Machine Shop Training."

FREE



ALLIED SCREW MACHINE CO., Inc.
(School Division)
Dept. MI-2, 603-9 W. Lake Street, Chicago, Ill.

HOME WORKSHOP FANS

Get full advantage from your shop by building that project you have long had in mind. No doubt you'll find it explained fully in the 1938 HOW-TO-BUILD-IT book which contains plans for making midget racers, auto trailers, furniture, radios, games and toys. Send your 50c now for this big 144-page book—contains 500 pictures and plans all in rotogravure.

Fawcett Bldg. FAWCETT PUBLICATIONS, INC. Greenwich, Conn.

Earn $150 to $300 PROFIT monthly with new Arc Welding

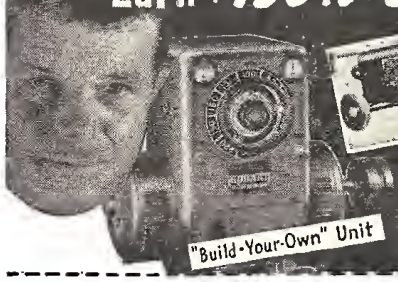

30 DAYS TRIAL at Hobart's risk and easy "Pays for itself" Terms

"BUILD YOUR OWN" Arc Welder

Couple your own engine to this unit on a used auto chassis and you have the money-making advantages of a portable welder at a saving of $300 to $500.

Now you can start a profitable welding business and easily clear $150 to $300 every month. With present low prices arc welding is now made available to you at little cost, and with this equipment it's easy to get the profitable big pay jobs. Hobart Arc Welders are simple to operate. Faster welding with that extra capacity and guaranteed to bring quality welding business.

LET YOUR WELDER PAY FOR ITSELF

You can own your welder with practically no expense to you. The extra profit on a single job is usually more than enough to take care of the small monthly payments. You can even rent a new Hobart and later purchase it without loss.

HOBART BROS., BOX SM-240, TROY, OHIO

Send me information without obligation on ☐ Build Your Own Welder ☐ Electric Drive Welder ☐ Gas Drive Welder ☐ 30 Days Trial, Easy Terms. Send me free books I've checked.

Name_____

Address_____

FREE! BOOKS ON ARC WELDING Check Coupon

☐ "How to Build Your Own"

☐ New Profits in Arc Welding

☐ New Arc Welding Cat.

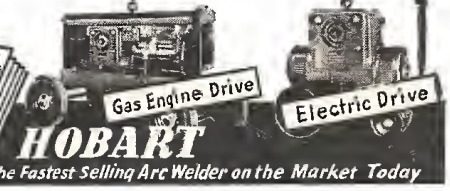

FACTORY-TO-YOU SAVES YOU UP TO 50%

EASY TERMS

PUT THIS 1940 14 TUBE CHASSIS IN YOUR PRESENT CABINET

$19.95 COMPLETE

Foreign Reception
Here's our big 20th Anniversary radio special . . the 14-tube 1940 Television-Adapted Midwest! Brilliant performance . . and amazing foreign reception!

30 Days Trial
Absolute satisfaction guaranteed on money-back basis. Catalog also shows 14-tube cabinet console for only $29.95 complete!

See Midwest's Answer To TRADE-INS!

● Other models from 5 to 17 Tubes, and up to 5 Wave Bands.

✓ with TELEVISION ADAPTATION

✓ with SUPER BUILT-IN AERIAL SYSTEM

Send 1¢ postcard for FREE 1940 catalog, showing complete line.
(USER-AGENTS MAKE EXTRA MONEY!)

MIDWEST RADIO CORPORATION
Dept. 10-F Cincinnati, Ohio

I WANT A PIPE THAT REALLY STAYS LIT a Briar Hill STOKER PIPE

SEND FOR FREE CATALOG

They say "it stays lit 5-6-7-8 minutes without puffing". That's right and it saves money too—smokes all the tobacco. No soggy haal — no tongue bite — no break-in. Every puff cool, dry and valvaty — no finger tamping — THE STOKER does it — it's scientific. Briar Hill Pipes are beautiful, genuine imported Briar — no finer at twice the price.

$1.50

BRIAR HILL CORP.
24 JACKSON ST. • MILLERSBURG, OHIO

Thompson BEATS the World on BOATS

Better Built Lower Prices

Canoes $66 and up

Rowboats $42 and up

Outboards $42 and up



Very fast utility model

Safe Boats With Full Length Spray Rails
Keep passengers perfectly dry—even at high speeds. Catalog also shows today's five most popular models of sailboats. Two big factories. Prompt shipment.

CATALOG FREE
Write for your copy. State kind of boat in which you are interested.

THOMPSON BROS. BOAT MFG. CO. [94]
230 Ann St., PESHTIGO, WIS. (Write to either place) 130 Elm St., CORTLAND, N. Y

Riding The Frozen Freight

[*Continued from page* 122]

the tractor trains. These outfits, weighing from 30 to 50 tons and jogging along at a speed of four miles an hour put additional pressure on the ice, already supporting a heavy blanket of snow. The result is that the water below, being noncompressible, is forced upwards through cracks in the ice and forms in pools on top of the ice, but under the snow. There it remains unfrozen, no matter how cold the weather. When the tractors treads dig into the snow, they bring up that slush. It freezes solid in no time. Then the men have to chop that ice away, and the tractor goes ahead a short distance, when the whole procedure has to be gone into again.

Tractor operators have devised a method for getting their tractors and loads out of slush ice and even out of the lakes when they "drown." There are few tractor trains down at the bottom of northern Canadian lakes. When an accident occurs, tractors or planes rush block and tackle to the scene. Woodsmen chop down heavy trees to make a tripod 20 feet high which is set up on the ice. If it is an easy salvage job, the hooks soon find the sleds and tractor below. The men and the tractor haul on the ropes. Up comes the load and the tractor, to freeze into a solid block of ice. But fires on the lake ice soon thaw out the frozen tractor, and away it usually goes with little reconditioning. That kind of salvage job usually takes from a day to a week.

But sometimes the load is more difficult to find. It has slipped away from the hole it went through, has sunk into mud. Grappling hooks may hunt for the load for days. Then when they fail to find it that way, a diver is sent down into the icy water to locate the load. It happened with one diver that it was so cold, he was pumped down hot air from a stove set up on the ice. The stove upset. There was a scramble to right it. No fresh air was going down to the diver. Then the men noticed the air pipes were being frantically pulled. They hauled up the diver nearly suffocating from the hot air.

Tractors are being used now in all parts of Canada where there is mining. Farthest north are the tractors on Great Bear Lake, where they are used the year round to haul timber and to haul ore from the mines to the plane and boat bases, as well as to haul supplies brought in by boat and plane.

Starfish see with their arms, but they probably can distinguish only light and shadow by the light-sensible cells that form the "eye-spots."

A dual-purpose sheep—producing good wool and mutton—has been bred for small-farm operators by federal sheep specialists.

All parts of the Jimson weed are poisonous, and especially the seed.

Flowers That Live Forever!

[*Continued from page* 59]

Some ten years ago while at work on another chemical invention, in a spirit of curiosity he immersed a rose in a solution which he happened to be heating at the moment. The flower became more or less shapeless and was thrown aside. Yet, when carelessly looked at a week later, it did have a certain attractiveness of color and form beyond that of a normally withered flower. This was the beginning of ten years of experimentation, with the result that now, the inventor, by a simple process, permanently preserves any flower, regardless of color or form, and with such perfection that at a distance of a foot or more, it cannot be distinguished from the fresh-cut flower. There are, today, over a score of brides who have been happy to possess their wedding bouquets from one to five years to date.

The process itself, given the formula, is extremely simple. It involves merely the immersion, of the flowers in a solution heated almost to the boiling point. Following that, the flowers are hung up to dry, and are then perfectly and permanently preserved. Nor are they fragile or brittle, but pliable and strong enough to be freely handled, boxed, and shipped. A remarkable feature of this invention is that the flowers may be preserved on the living, growing plant, thus producing an ever-blooming rose bush, for example. Or if it is desired, preserved flowers may be set up in growing Japanese gardens, making these appear to be in bloom.

Ever since the publication of the patent, Mr. Joffe has been receiving numerous inquiries from scientists, museums, growers, florists, and lovers of flowers, both here and abroad.

You're Right—That's Wrong

Correct Answers to Quiz on page 65

1. True	13. False
2. False	14. True
3. False	15. False
4. True	16. False
5. True	17. True
6. False	18. True
7. True	19. False
8. False	20. False
9. True	21. True
10. False	22. False
11. True	23. False
12. True	24. True
	25. False

Attention, MI Readers!

We will pay $1 for each true-false statement which we find acceptable. Statements will not be returned. Address the Quiz Editor, MECHANIX ILLUSTRATED, 1501 Broadway, New York City.

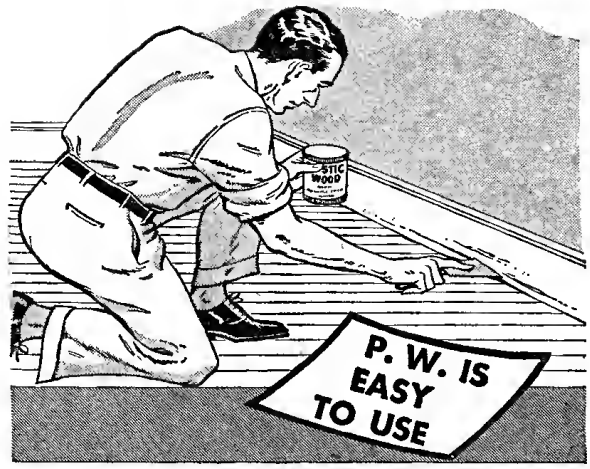

P. W. REPAIRS CRACKS and HOLES

Use Plastic Wood to fill cracks in baseboards, floors, shelving —to fill old screw holes. It handles easily as putty and quickly hardens into lasting wood. In cans or tubes at Paint, Hardware, 10¢ Stores. Try it!

PLASTIC WOOD

VEST POCKET DRY RAZOR

Requires No Electricity, No Soap, Water, or Cream.

The razor roller shaves off whiskers like magic as you roll it over the face. Cannot cut the skin. Self-cleaning. The most compact, practical razor ever invented. Satisfaction guaranteed or money refunded in 10 days. IDEAL XMAS GIFT. Sent postpaid for only $1 (C.O.D. $1.15). You can use a "Yankee" anywhere.

YANKEE SHAVER, Box 495, Lynn, Mass.



New 1940 latest edition with newest designs and up-to-date price quotations.

BUYERS' GUIDE and CATALOG No 13

Wood WORKERS SUPPLIES COMPLETE LISTING

THIS up-to-the-minute buyers' guide and catalog brings you: 136 Pages 10¢

Lists of all Standard American Woods, cut to convenient sizes without waste; extra-rare fancy woods from Africa, Australia and India at astoundingly low prices; figured Veneers, Plywoods, legs, arms, new type ornaments, inlays and overlays, hardware, tools and miscellany, etc., etc.—Also, 235 (yes, 235!) brand new scroll saw patterns—Also, page after page of bargain deals. All this for only 10c!

Also latest knacks, e.g. the up-to-date processes of finishing, simplified inlay method, care of brush and other hints for experts and amateurs.

—TEAR OUT this ad NOW as reminder—

to get that new catalog. Mail with 10c silver or stamps to CRAFTSMAN WOOD SERVICE CO. 2862 S. Mary St., Chicago

Know! YOUR CAR

ASK TO SEE IT!

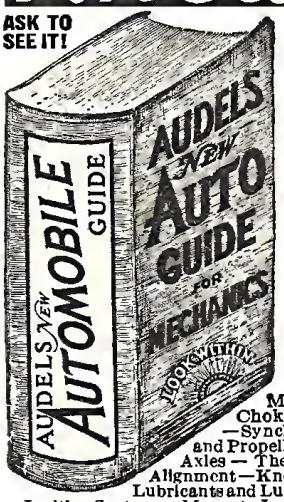

GOOD NEWS—JUST OUT

AUDELS NEW AUTOMOBILE GUIDE is NEW from cover to cover. Explaining the Theory, Construction and Servicing of modern motor cars, trucks and buses; and the application of auto type Diesel Engines. . . . **PRACTICAL INFORMATION IN HANDY FORM, 1540 PAGES COVERING . . .**

AUTO REPAIRS & SERVICE HELPS

All the Parts of an Automobile—Automotive Physics—The Gas Engine—How a Gas Engine Works—Gas Engine Principles—Multi-Cylinder Engines—Horse Power—Automobile Engines—Engines: Stationary Parts—Engines: Moving Parts—Pistons—Piston Rings—Connecting Rods—Crank Shafts—The Valves — The Valve Gear —Cams and Cam Action—Valve Timing—Cooling Systems—Gasoline — Fuel Feed Systems — The Mixture—Carburetors—Automatic Choke—Super-Chargers—Transmissions —Synchro-Mesh — Clutches — Universals and Propeller Shafts—The Differential—Rear Axles — The Running Gear — Brakes — Wheel Alignment—Knee Action—Steering Gear—Tires—Lubricants and Lubrication—Automotive Electricity —Ignition Systems—Magneto Ignition—Spark Plugs—Ignition Coils —Distributors—Automatic Spark Control—Ignition Timing—Generators—Starters —Generator and Starter Testing—Lighting Systems—Storage Batteries—Battery Charging — Battery Testing Troubles. **Automotive Diesel Engines. Inside Views of all Automobile Parts Fully Illustrated. To Get This Assistance for Yourself Simply Fill In and Mail Coupon Today.**

$4 COMPLETE • PAY ONLY $1. A MONTH ←

THEO. AUDEL & CO., 49 WEST 23rd STREET, NEW YORK

Please send me postpaid AUDELS NEW AUTOMOBILE GUIDE ($4) for free examination. If I decide to keep it, I will send you $1 within 7 days; then remit $1 monthly until purchase price of $4 is paid. Otherwise, I will return it to you promptly.

Name _____

Address _____

Occupation _____

Reference _____ M.M.

MYSTERIOUS DEVICE WELDS BRAZES AND SOLDERS

ANYONE CAN OPERATE

Now, an electric welding, brazing and soldering Torch, complete with power unit, goggles and supplies. **Works INSTANTLY off any light socket.** Does a thousand and one repair jobs at amazingly LOW COST on aluminum, iron, steel and other metals. **Indispensable** for Auto, Body and Fender Repairs, and home repairs—shop, factory, farm, engineer, janitor, sheet metal, radio and bicycle repairs. Anyone can handle without previous experience with our simple instructions. **10-DAY HOME TRIAL** Write at once for Special Introductory Low Price Offer. Try 3 in 1 Electric Torch for 10 days at our risk, or get one free by helping to introduce it. **ELECTRO-TORCH CO., 2613-GB, Michigan Ave., Chicago**

TIRE PUNCTURED 27 TIMES..

LEAKS NO AIR



1001 Repairs In Home, Auto, Farm For Only 1¢ EACH

New plastinoid "putty"—**SO-LO**—fills cracks, holes in tires, shoes, boots—anything of rubber, leather or cloth. Spreads on like butter. Dries tough. Waterproof, flexible, non-skid. Won't come off—guaranteed! 25c package (25 repairs) shows many uses. At any 10c or hardware store.

So-Lo

"Woolworth, Kresge, Newberry, Murphy, McCrory, Neisner, McLellan, Sears and Ward, are now featuring SO-LO".

Want To Buy A Rattlesnake?

[*Continued from page 76*]

Fangs properly removed never grow back, and although the sacs are full of venom again within a short time the rattler has no way of ejecting it.

When, a few days later, the snake has entirely recovered from its operation it is ready for a zoo, snake act or circus. Telegrams come hourly—in fact so many that the farm has its own teletype for receiving orders—and snakes in special boxes go all over the world.

Although the Kings have shipped tens of thousands of rattlesnakes they have had only one major catastrophe. A telegram arrived one day a few years ago from a man with a snake act requesting "one den not fixed snakes." A "fixed" snake, of course, is one that has had its fangs removed. Consequently the snake man received a box of deadly rattlers instead of the defanged variety ordinarily used by snake men. Paying no attention to the warning notices on the box the fellow opened it and thrust in his hand to remove the reptiles. He was instantly bitten and died a few hours later.

The telegram he had sent read, "One den lot fixed snakes," but in transmitting the message the telegraph company had somehow changed the "l" to an "n." And that small mistake had cost a man his life.

In this instance the blame had to be borne by the telegraph company, but it bears out Snake King's home-made adage: "It doesn't pay to make mistakes—with rattlesnakes!"

Bug Catching Like Snipe Hunt

[*Continued from page 77*]

Although war dispatches from the front are closely guarded and censored, reporting spies have discovered that June beetles, for example, are heaviest in flight in May, June and July, and that the female bugs fly earlier in the evening than the males.

After lengthy experiments prove the effectiveness of certain light traps for a definite species of insect, lights of known density and intensity may then be installed on individual farms to concentrate and wipe out crop-swallowing swarms peculiar to each community.

If the air in a house is dry, it takes more fuel for heating, because a room is comfortable at five to eight degrees lower in moist air.

Average-sized tires on an automobile revolve 43,000 times an hour if the car is driven at 60-mile-an-hour speed.

One kind of artificial rubber in Germany is made of carbon and lime.

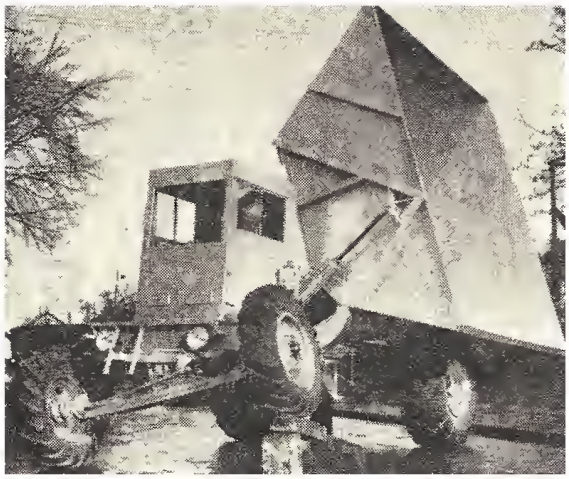

Knee Action Axle On Sugar-Cane Truck

This wierd juggernaut was designed and constructed in Seattle by local engineers to traverse the sugar cane fields in the Hawaiian Islands, to act as a sort of go-between from the canes to the mill railroad. The lumbering machine weighs 13,500 pounds when empty and can carry a four ton load of cane in a level load. It is powered with a 95 hp. 6 cylinder gas engine, and motivated by a chain drive. One man sitting in the cab can cruise along the rows of sugar cane, handle the loading of it into the huge tank on the back, and then drive to a waiting railway car and dump the load into the car.

Curiosity Killed This Octopus

When a man captures an octopus, that's news—good news for the museum he represents. Over a pickled six-foot specimen brought back from the Phoenix Islands in the South Seas, Dr. Leonard P. Schultz of the U. S. National Museum told how the big sea-squirmer's curiosity proved its undoing.

Dr. Schultz and an assistant were collecting with a big net, in water three or four feet deep, when a six-foot octopus slithered out from under a rock and swam slowly towards him, evidently attracted by his black and white tennis shoes.

"I stood still, hoping I could net the creature," said Dr. Schultz, "but my helper moved suddenly and it darted back. After a patient wait, its curiosity got the better of it and it came out again. It came closer and closer, and just as it seemed about to wrap its tentacles about the object of its interest—my shoes—I clapped the big net over it and succeeded in capturing it.

"When I looked up, my helper was far away up the beach."

LIGHTNING SPEED BOOSTER STEPS-UP TYPEBAR ACTION

You want fast, easy action when you type. Corona Speed Booster steps up action of typebars. Floating Shift, Piano-key Action...also make Coronas faster and easier. 3 portable models: Silent... Sterling...Standard. Mail coupon for folder *today.*

$1.00 A WEEK TO OWN A CORONA
Plus small down payment

FREE DEMONSTRATION AT ALL DEALERS

SPEEDLINE **CORONA**

L C SMITH & CORONA TYPEWRITERS INC
Desk 2, 187 Almond Street, Syracuse, New York

Please send me free folder describing Speedline Coronas.

Name_____

Address_____

City_____ State_____

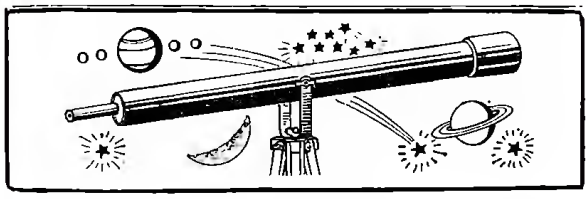

100 POWER TELESCOPE
COMPLETE LENS KIT *only* **$1.95**

Make your own high powered telescope in one evening of easy work. All optical parts completely finished for 6 ft. long refracting telescope. Kit contains 3" diameter 75" F. L. ground and polished objective lens and 2 astronomical eyepieces 50X and 100X. Here is your chance to own a high powered telescope and study the mountains and craters on the moon, the ringed planet Saturn, the moons of Jupiter, double stars, and hundreds of other interesting sights. Complete kit with full directions for mounting, only $1.95 postpaid. Send money order now for immediate delivery.

BROWNSCOPE CO. Dept. 72 5 W. 27th St., New York

LEARN Short-Method Arithmetic

÷ × = + √

Simplified system used by "master minds" on stage, accountants, bankers, etc. Easy to learn. Add columns of figures short-cut method; multiply 4 figures by 4 figures without using old-fashioned multiplication; use sight method of proving addition, division, etc. Learn horsepower calculation, how to use slide rule, micrometer. Complete illustrated course only $1.00, postpaid. Satisfaction or refund. Amaze your friends with your mental wizardry! Free details—mail coupon TODAY.

FREE

NELSON CO., B-301 Manhattan Bldg., Chicago, Ill.
Send free details about "Short-Method Mental Arithmetic" without obligation on my part.

Name _____

Address _____

City_____ State_____

Complete RADIO COURSE $1.95 POSTPAID

Amazing Price Reduction

A limited quantity of the regular $39.00 R.T.I. Radio courses in reprinted form are offered to you at only $1.95. These are the latest Radio and Television Courses, complete in every way, and exactly the same as the much higher priced original text. Rush your order today to obtain this remarkable bargain in radio training.

PREPARED FOR HOME-STUDY

Radio Technical Institute Course will give you all the training needed to get ahead in the growing fields of Radio and Television. No special education or previous experience is needed. The streamlined lessons are clear, interesting, easy to master and use. Fellows just like you have found this course the stepping stone to better jobs and higher pay. A final examination may be taken later and handsome diploma obtained. The special $1.95 price for the complete course can be earned in an hour of radio work.

EVERYTHING ABOUT RADIO

The R.T.I. training is complete. Everything from simple facts to complex servicing problems. You really get three courses in one: (1) Elements of Electricity and Radio, (2) Practical and Applied Radio, and (3) Advanced Training. From the very start you are introduced to real servicing methods and equipment. The course is so planned that you will be able to earn nice spare time money before you reach the fifteenth lesson. This is your chance to obtain one of the BEST RADIO COURSES for $1.95, complete, no other payments.

Guarantee
You must be pleased or your money will be immediately refunded. References: Any magazine publisher, or Dun & Bradstreet.

NEW LIMITED EDITION

There is but a small quantity of the courses left at the special reduced price. You can't go wrong with our "money back" guarantee. Send $1.95 as complete payment for the entire course. Or we will ship C.O.D. charging a few cents postage. Answer today.

SUPREME PUBLICATIONS 3727 West 13th St. Room 303, Chicago, Ill.

NEW! Pocket Size Combination Sending & Receiving RADIO

The smallest tube radio in the world. **SIZE ONLY** 3"x4½"x1½" **COMPLETE WITH SELF CONTAINED BATTERIES!** Wt. only 15 ozs. Fits easily in any pocket. Use it everywhere you go. Receives distant broadcast stations and will **BROADCAST** your voice and music to any ordinary radio hundreds of feet away! No changes or plug-ins! Two or more **"TINYDYNES"** make a complete **"WIRELESS PHONE"**—Truly a marvelous radio combination! Anyone can operate it in a minute! Sent complete with "Mike-Phone", instructions, etc. **PRACTICAL—SIMPLE—A REAL VALUE!** Beautifully finished in durable steel crackle case.
SEND ONLY $1.00 (Check, M. O., Cash) and pay postman only $3.99 plus postage. **GUARANTEED.** Order your **"TINYOYNE"** now and have the newest thing out!
MIDGET RADIO CO., **DEPT. TM-2,** **KEARNEY, NEBR.**

EASIEST to master!

THIS NEW P-A

● **Such beautiful tone, and so easy to play! Just touch a key and blow normally; you can't miss. Nothing to compare with these new P-A Saxes, Clarinets, Trumpets, and other P-A instruments. Fully guaranteed; your success assured. See your music dealer or write direct for beautiful free book. No obligation. Easy terms. Greatest fun, easiest with P-A. Write today sure.** 1303

PAN-AMERICAN
230 P-A BUILDING **ELKHART, INDIANA**

"Ice Lizard"

[*Continued from page* 91]

The power-plant consists of a ½ h. p. utility gas engine such as can be taken off of washing-machines, or other home appliances. Any good ½-h. p. engine will do so long as it turns up 1,700 to 1,800 r. p. m. These have a kick-starter and the newest models are equipped with starter and battery for a small additional cost. This engine is belted to a reduction pulley and jack-shaft to which is fastened a 4-foot, 4-inch wooden air propeller with a 2-foot, 6-inch pitch.

First choose an oak block 12 inches long by 6 inches wide by 2 inches thick. To the top of this mount two ¾-inch pillow blocks as indicated and bore a hole in each corner for a ¾-inch pipe. Bend the four pieces of ¾-inch pipe in the shape indicated. The feet are threaded to floor flanges and the tops fit up in the corner holes in the oak block with lock-nuts above and below. The finished standard should bring the jack-shaft about 2 feet above the deck and its feet should spread to within a few inches of the sides of the deck. Front clearance of two or three inches should be allowed for the propeller from bow. Bolt the flanges to the deck and the propeller can then be fitted to the front end of the jack-shaft. The V pulleys, jack-shaft and V belting used can be purchased at any chain store selling the popular makes of homecraft power tools. As shown, ¾-inch shafting is specified throughout.

Bolt the engine to the deck, shimming it up if necessary to fit the belt over the engine and jack-shaft pulleys and then allow it to come back so pulley is reasonably taut before bolting home. As time stretches the belt this slack can be taken up by readjusting the jack-shaft block height by means of the supporting pipe lock-nuts. The engine speed control and switch (as well as electric starter controls in the late models) can be extended back to the driver's position and fastened in any convenient location. The exhaust should be led aft by a long flexible hose lashed to one side of the body.

If thought necessary, the builder can build a front and side screen wire protection for the propeller. While of low power, it might easily prove dangerous nevertheless and a screen hood would be an added safety factor. Even side, tail and head lights can be added with only a little additional wiring. Your starting battery can be used to provide the lighting power. Thus, night driving over the lake will provide its own thrills.

In starting the "Ice Lizard," jam the brake into the ice, start the engine and let it warm up. Then release the brake and the craft will pick up speed in a few seconds. Make wide turns and for quick stops cut the engine and jam the brake down hard.

Three or more "Ice Lizards" will provide plenty of ice sport this winter. Pepped-up engines, sharp runners and racing props might enable you to drive the old boat at fancy speed.

British Bombers Prove Worth In Battle

A group of Royal Air Force planes in echelon formation, ready to dive bomb. These two-seat bombers, which were not held in very high esteem before the present war started, have shown their worth in mixed battle with German planes over which they have demonstrated marked superiority. These planes are Fairey "Battles", powered with Rolls-Royce engines, and capable of a top speed of 257 m.p.h.

Synthetic Lumber Made Of Pulped Cotton Plants

Cotton may hit back at wood, which has taken a good deal of its business away via the rayon route. Synthetic insulating lumber has been made out of pulped whole cotton plants, reported Herbert T. Bates and Prof. Frank C. Vilbrandt of Virginia Polytechnic Institute.

The cotton plants, bolls and all, were pulped in a laboratory rod mill and the pulp squeezed between heated plates in a hydraulic press. The material thus made came out satisfactorily in tests for strength, density and heat insulation.

• Never before an Evinrude so inexpensive to own, so handy and economical to operate. The sensational new "Mate" fits your own or rented boats—drives rowboats up to 4½ miles an hour, canoes up to 5 miles. Runs all day on a single gallon of fuel. Amazing starting ease — a flick of the starting cord and you're *away!* Write for catalog today!

9 EVINRUDES TO CHOOSE FROM

Evinrude offers the widest range of models, from the lightest, handiest, to the swiftest, most powerful. All are famed for exceptional starting ease, smoothness, reliability. All offer advanced Hooded Power construction, Co-Pilot steering, certified horsepower.

AN ELTO FOR ONLY $26.50 New Elto Cub weighs only 8½ pounds, costs only 2c an hour to run. Now, a complete line of 6 Elto models —*built by Evinrude*—offer outstanding quality at low cost. Write for free Evinrude and Elto catalogs, Boat Directory, Boat & Motor Selector.

EVINRUDE MATE
WEIGHS ONLY 10 LBS.
RUNS 10 HRS. ON 1 GALLON
•
WRITE FOR FREE CATALOG
All Prices F. O. B. Factory

EVINRUDE MOTORS
4283 N. 27th St., Milwaukee, Wis.

Inventions Wanted
Patented or Unpatented

We have been successfully selling inventions, patented and unpatented, since 1924. Write for proof, and tell us what you have for sale.
CHARTERED INSTITUTE of AMERICAN INVENTORS
Dept. 5, Barrister Building Washington, D. C.

ATTENTION! MODEL BUILDERS, HOBBYIST, MACHINIST, DRAFTSMAN ENGINEER—NO MORE HUNTING THRU ENDLESS STACKS OF HARDWARE CATALOGS TO FIND THE CORRECT SIZE TAP DRILL, THE RIGHT SIZE CLEARANCE HOLE, THE CORRECT SIZE LOCKWASHER, THE OUTSIDE DIAMETER OF A FLAT WASHER, THE THICKNESS OF A HEXAGONAL NUT. **HANDY STANDARDS** IS A MOST THOROUGH AND COMPLETE COMPILATION OF USEFUL DATA ON THE A.S.M.E. MACHINE SCREW AND IT'S ASSOCIATED HARDWARE.
SAVE YOURSELF COUNTLESS WASTED HOURS THAT COULD BE DIVERTED INTO PROFITABLE CHANNELS.
PRICE 50¢ HANDY STANDARDS 109-54 132 ST SOUTH OZONE PARK, NY

..Spending Your Money..
on preventable Motor Trouble, Car, Truck, Tractor Owners!

For an engine free of carbon, pour FRETONE, the Super-Solvent and Upper Cylinder Lubricant into your motor.
GUARANTEED to Improve the Performance of Your Engine, or Your Money Refunded! Run a Compression Test before and after using FRETONE, at your garage or service station. A recording blank and full instructions supplied FREE.
YOU CAN'T LOSE! Send $1.00 for can of FRETONE. Get Compression Record Chart FREE. If FRETONE doesn't improve the performance of your motor, you get your dollar back.
ORDER NOW! FRETONE will make starting easier.
Dealers are being established. Send name and address of your favorite filling station and garage.
J. W. SPEAKER CORPORATION, Dept. M-1
1655 N. Water St. Milwaukee, Wis.
Distributor Territories Available

GOOD BYE TO BATTERIES!

GENERATES OWN "JUICE"

NO MORE BATTERIES TO BUY—A never-failing Eternal supply of current with brilliant light. The "PARKER" is "always there"—anytime—anywhere—today, tomorrow or ten years hence. Battery failures now banished forever. Just press the lever and like magic PRESTO! you have a light.
REPAYS ITS COST MANY TIMES. Ideal for Autos, Boats, Airplanes, Homes, Camping, Fishing and all emergencies. A quality product made in U. S. A. sturdily built—beautifully designed Bakelite Case—Chrome trimmed.

General Electric Magnet

Postpaid Anywhere—$2.25 Each

PARKER MFG. CO., 2026 N. Clark St., Chicago, Ill.
☐ Send C.O.D. I will pay Postman $2.25 plus few cents postage.
☐ I enclose $2.25 send Parker Lite postage prepaid.

NAME _____

ADDRESS _____

RADIO

EVERY Radio Mechanic, Operator, Owner & Student Needs "Audels New Radiomans Guide" Just Out! Presents whole Subject of Modern Radio—covering the Basic Principles—Construction & Operation—Service—Repairs—Troubles—All Easily Understood. Over 750 Pgs.—400 Illustrations, Parts & Diagrams—LATE TELEVISION DATA—Valuable for Reference & Home Study. To get this information for yourself send postal card Today for FREE RADIO FOLDER. Complete book $4 postpaid only $1 monthly. Money back if not satisfied

AUDEL, Publishers; 49 W. 23rd St., NEW YORK

Print Your Own



Cards, Stationery, Advertising, labels, paper, circulars, tags, etc. Save money and time. Sold direct from factory only. Junior Outfit $9.00. Senior outfits $17 and up. Do popular raised printing like engraving with any of our presses.

Print for Others, Big Profits

Pays for itself in a short time. Easy rules sent. Write for free catalog of outfits and all details.

KELSEY PRESSES, D-9, Meriden, Conn.

WHEN YOU BUY FLASHLIGHT BATTERIES DEMAND

"EVEREADY"

***FRESH* DATED BATTERIES**

The word "Eveready" is the registered trade-mark of National Carbon Co., Inc.

We have Everything
PHOTOGRAPHIC *New or Used at attractive Prices*

WE'VE DUSTED OFF!

A lot of fine NEW & USED—CAMERAS (Movie & Still)—PROJECTORS—ENLARGERS—ACCESSORIES—Just for you. Everything in A-1 Condition. We are offering these items at the LOWEST PRICES imaginable. What do you need? Write us today—Get our prices first.

Address letters to Dept. MX2.

TRADE-INS Accepted—"Service Is Our Motto"
CAMERA EXCHANGE ORIGINATORS SINCE 1890

NEW YORK CAMERA EXCHANGE
116 FULTON ST. NEW YORK

Modernistic End Table

[*Continued from page 99*]

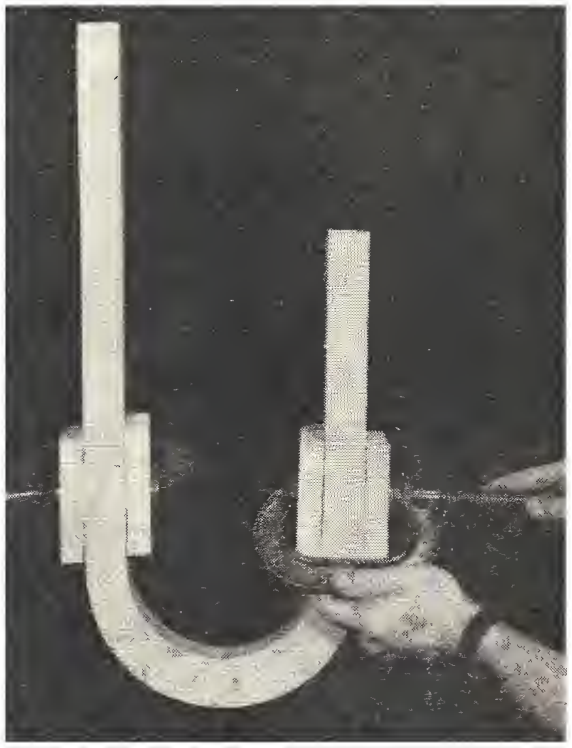

Half-lap joints, well glued, are used where the straight sections meet the curved section of the table. Use small scraps of wood under the clamps to prevent the heads of the latter from marring the surfaces.

bottom of the stem curve. Again sand this assembly. The curved piece which supports the top is cut from a piece of 1¼" thick stock, 6" wide and 8" long. The outside radius is 6", inside 4¾". The tangent portion of this piece is 2".

Screw the small base piece to the stem and then screw the large base piece to the small one. Screw the piece B to the top of the short leg of the stem through a diagonally drilled hole in the stem. Level this piece and drill a ½" hole through the long leg of the stem and into the end of this piece. Into this hole insert and glue a ½" dowel and allow it to protrude about 1½". Now drill a ½" hole in the upper curved piece and glue this in place. Note that the small top piece is previously attached to the top of the long leg with a diagonally inserted screw.

Sand overall and stain the tops and base pieces. Shellac the stem section, and give a coat or two of brilliant aluminum paint. Then varnish the entire table.—*Ralph T. Moore.*

Cockroaches are fond of starch and will eat it off bookbindings and curtains.

Cotton is being grown farther north in the Soviet Union than anywhere else in the world.

Book Ends For A Man's Den

[*Continued from page* 95]

Copper Disc Book Ends: At first glance, these book ends appear to be two solid discs of copper nearly 1 inch thick, one lying flat, the other attached to it at right angles to rest vertically. From each vertical disc stands out, in silhouette, the outline of a horse's or dog's head. Any other appropriate outline can be used instead.

The discs are not solid copper; here's the trick of making them: Turn four hard maple discs 6 inches in diameter and 5/8-inch thick, with square edges. Turn a fifth disc of the same diameter of white pine. Get enough sheet copper in fairly heavy gauge to make four discs 8 inches in diameter and trim them carefully to size with tin snips or cold chisel.

Mount a maple disc on the face plate, bring up the back-up block centered on the dead center. Place a copper disc between them and then with spinning tools, or a rounded tool in the metal lathe, spin the protruding portion of the copper over until it lies flat on the edge of the maple disc. It will help immensely if the copper is annealed several times during this spinning. To anneal copper, heat it cherry red and then douse in cold water. If properly done the copper will become so soft that you can, in an emergency, do this spinning with the rounded, well-greased end of a maple dowel held in the hands. The surface should be kept lubricated at all times during the spinning. As the edge is spun, the metal is somewhat stretched, so you will have a bit of waste to cut off with a sharpened file tang when the spinning has been finished. Be sure the copper extends fully to the back surface of the maple so no wood will show.

Polish, at high speed, using the following abrasives on the copper in the order named: No. 0, No. 000 steel wool, powdered pumice or fine emery dust on an oily rag, rouge on an oily rag. The result will be a mirror-like finish. Wash this off with soda water, rinse, and dry; then give a quick, even coat of clear lacquer to prevent tarnishing.

When the four discs have been made, cut off a segment from each and mount them in pairs as shown with long wood screws turned up through the bottom discs into the uprights to hold them securely.

A dog or horse head is ideal for the silhouette. Make this from 1½ to 2 inches over all. Trace the outline on paper carefully, glue this to a half-inch white pine piece. Fit the thick copper between the wood and another similar piece below and fasten the three pieces together with screws or nails through the corners of the wood beyond the metal. Then with a metal cutting blade in the jig saw set at slow speed, jig out the head. Make both alike. Smooth the saw cuts with a fine file, then polish the pieces in the manner suggested above. Two prongs extending from the animal's

[*Continued on page* 132]

FREE CATALOG

BRINGS YOU MORE FUN IN RADIO AT LESS COST!

GET AN EYEFUL of this **FREE** book full of values in radios, parts and equipment. 188 jam-packed pages. All the nationally advertised names. 64 receiver models alone to choose from. *Sensational "Build-It-Yourself" Kits that double the thrill of owning a radio, and cut the cost in half.* Prices consistently lower on everything—from the tops in phonograph-radio combinations to the latest type tubes. Wherever you are, you can order at home . . . save time and money. Every item guaranteed. Send for this big **FREE** catalog today. Have more fun in Radio. Mail this coupon NOW!

NEW YORK, N. Y. 100 SIXTH AVENUE
CHICAGO, ILL. 901 W. JACKSON BLVD.
ATLANTA, GA. 265 PEACHTREE ST.
BOSTON, MASS.
BRONX, N. Y.
NEWARK, N. J.
JAMAICA, L. I.

LAFAYETTE RADIO

Radio Wire Television Inc.
Dept. 22B, 100 Sixth Ave., New York, N. Y.
Rush **FREE** 1940 Radio Catalog No. 78

NAME.....
ADDRESS.....
CITY.....STATE.....

WORLD'S FINEST RADIO CATALOG FREE

PASTE COUPON ON PENNY POSTCARD

GET 100 TOOLS in ONE

INSIST ON GENUINE "MOTO-TOOL"

Grinds, polishes, sharpens, drills, engraves, etc. Saves time, cuts cost. Handiest tool in home or shop . . . use it daily. Same tool as used on precision jobs in factories.

OVER 25,000 R. P. M. High speed conserves cutters, does finer work. Has oil-less (oil-sealed) bearings, cooling fan, balanced armature. 110 V. (AC-DC). MODEL 1 MOTO-TOOL with chuck, 1/8" collet, only $9.85. MASTER MODEL 2, 27,000 r.p.m., heavier, more powerful, only $16.50.

10-DAY TRIAL. See the genuine Dremel Moto-Tools at better Dealer's or order direct from factory on 10-day money-back trial. Catalog of Dremel tools, equipment and special combination offers. FREE. DREMEL MFG. CO., Dept. M-140-B, Racine, Wis.

Only $9.85 POST PAID MASTER MODEL $16.50

NOW ONLY $4.95

REAL ENGINE VALUE

Over 7,000 GHQ Gas Engine Kits were sold at $8.50. Over 15,000 sold last year. Now is your chance to buy the *New Improved* kit for $4.95. Absolutely complete with coil, plug, etc. Send only $1. Shipped Exp. Coll. for balance same day. Send 3c for new 16 page illustrated catalog.

DEALERS WANTED.

All Parts Guaranteed

⅓ H.P.— For Boats, Planes, Etc.

ALL PARTS FINISHED—ONLY A SCREWDRIVER NEEDED
AVERAGE ASSEMBLY TIME 30 MINUTES.

GHQ MOTORS, 40A East 21 St., New York, N. Y.

Agents and Dealers WANTED
to Sell or Rent the NEW

AMAZING LOW PRICES! Buy Direct From Mead

MEAD Ranger SCOOTER

These sensational, new, improved Ranger Scooters sell like hot cakes all over the country! Order your demonstrator while territory is still open—there's big money selling to all stores needing quick, cheap delivery . . . sell to messengers, mechanics, garages, canvassers, friends; or rent for easy hourly profits at beaches, resorts, etc. World's CHEAPEST transportation! 120 miles per gallon, 35 m.p.h. Low prices, buying direct from MEAD'S. MEAD'S New Ranger STEEL frame, 2-speed gear, 1½ or 2½ H.P. Solo models, tandem, delivery, sidecar or trailer. HURRY! Write for FREE Scooter Circular, Easy Terms. (Bicycle Circular Free on request.)

Mead CYCLE CO.
AMERICA'S MOST FAMOUS CYCLE NAME FOR FIFTY YEARS
77 So. Market. Dept. A-3, Chicago, U.S.A.

Build Your Own ELECTRICAL EQUIPMENT
LEJAY Plans Will Help You!

Our Splendid 1940 Catalog is now ready—containing motors, radios, burglar alarms, razors, 110 volt auto generators, welders, drills, and a host of electrical accessories. Also lists our Nationally famous PLANS for building your own electrical devices such as wind plants, outboard motors, fencers, scooters, etc. Send 10c for above plan wanted including our Big catalog.
LEJAY MFG. CO., 2414 LeJay Building, Minneapolis, Minnesota.

NEW TURN SIGNAL
FLASHES from REAR WINDOW—DASH Control
AGENTS A whirlwind seller. Drivers buy on flash demonstration. Dealers buy 3 to 12. Your profit mark-up as high as 264%. Biggest sensation of year. Rush name quick for facts and Demonstrator sample plan. All Free! Rush.
WATCH-MY-TURN SIGNAL CO., Dept. W-622, Walnut Bldg., Des Moines, Iowa

BIG NEW STREAMLINED LATHE AT SENSATIONAL BARGAIN PRICE

Swings 10 inches

Imagine! This extra heavy wood lathe, steel bed 48" long, at low prices. Heavy duty head stock 4-step cone pulley for V-belt. No. 2 Morse Taper Centers. Sealed ball bearings, 6" face plate screws onto spindle. Tool rest 10" long. Complete line of accessories at amazing low prices. Write today for free catalog describing Blue Star full line precision woodworking machinery. Factory-to-you prices. Not sold through agents.
BLUE STAR PRODUCTS 302 Gate Street, Fairfield, Iowa

Saw-Filing
Pays up to $2 or $3 an Hour in Spare Time

A FOLEY Automatic Saw Filer files hand, circular and band saws better than the best hand filer. Cash business, no canvassing, no eyestrain. No experience needed. Louis P. Wadowick, Ohio, says, "I have filed 764 saws in spare time and have earned $850.00 in carpenter work due directly to my saw filing contacts." Send coupon for FREE PLAN, no obligation.



FOLEY MFG. CO., 217-40 Foley Bldg. Minneapolis, Minn.
Send Free Plan on Saw Filing business.
Name ----------
Address ----------

Book Ends For A Man's Den

[*Continued from page* 131]

neck are then passed through holes made for them in the upright discs and the heads set in place. They should be slightly above center. Bend the protruding ends of the copper prongs over on the back side. If you wish, these prongs may be omitted and the heads soldered onto the upright discs. If this is done, then both heads and discs must be cleaned and lacquered after the soldering operation.

To finish the book ends, cover bottom and back sides of the discs with felt glued on. No leading of the pieces will be necessary, since the weight of the copper plus that of the hard maple will be sufficient to hold them firmly in place.

Mount Vernon Playhouse

[*Continued from page* 89]

are purely decorative and may be dispensed with. Building problems are reduced to simplest terms by the use of outdoor plywood, which will not deteriorate under any weathering condition, and thus can be used on roof as well as sides, each being cut in a single panel. The standard widths of 48 in. fit exactly in each case.

To gain additional height, a 10 in. baseboard is carried all around on the outside, and if individual needs demand greater height, simply add another baseboard. For a playhouse only, no baseboard will be needed for children under seven years. To divide into two rooms, a half-partition about 30 in. high is suggested. The original Mount Vernon is painted white with a red roof; the same color scheme fits in with this playhouse. On plywood, however, do not use a quick-drying paint or enamel.—*Hi Sibley.*

Lead Skate Sheath

[*Continued from page* 92]

them sharp and free from nicks. Get a small sheet of the lead from a plumber or hardware store and cut two strips 2 inches wide and as long as the runners. Cut away portions of each side to form triangular prongs as shown. Then fold the lead lengthwise in the center. You now have only to slip one of these over your skate runner and bend the tabs over the top of the runner to lock them in place as shown in the lower sketch.

If you have some black lacquer handy paint the sheaths before using them, although lead itself will not rust. By rubbing a small amount of heavy oil on the inside surface of each sheath, a bit of this will be transmitted to the runners and thus tend to keep them free from rust.

New Teeth For The Dogs Of War

The days when the cavalry charged into action with flashing sabers has passed away with the formation of the new streamlined First Cavalry Division, at Fort Bliss, El Paso, Texas, and commanded by Major General Kenyon A. Joyce. When the mounted troopers ride into action they are armed with the .45 cal. automatic pistol, some also carry the .30 cal. rifle, some carry the .30 cal. automatic rifle, others carry the .45 cal. sub-machine gun. Other weapons of this new streamlined cavalry include the .30 and .50 cal. machine guns, which are carried by pack horses, a complete machine gun being carried by one pack animal led by a mounted trooper. The photo above shows weapons being inspected by Lieut. G. F. Powell. Front to rear right, two of each type are shown; .30 cal. machine gun air cooled; .30 cal. machine gun, water cooled; .50 cal. machine gun; 37 mm. gun; 75 mm. howitzer. Front to rear left: .45 cal. automatic; .45 cal. sub-machine gun; .30 cal. rifle; .30 cal. automatic rifle.

Ice Tops

[*Continued from page* 92]

length of stout cord around the top, beginning near the bottom, until the sides are wrapped. A smooth jerk will set it spinning on the ice. The spindle top is spun with the fingers. Draw a circle 6 feet in diameter on the ice, and let two or three persons spin their tops at the same time. If two tops leave the circle, the owner of the remaining top wins one point. If all the tops remain in the circle, the top which stops last gets the point. Play "Ice Tops" up to a game of 15 points. Painted in bright colors, or decorated with contrasting stripes of color, they look very attractive.

GOOD NEWS FOR PHOTO FANS!

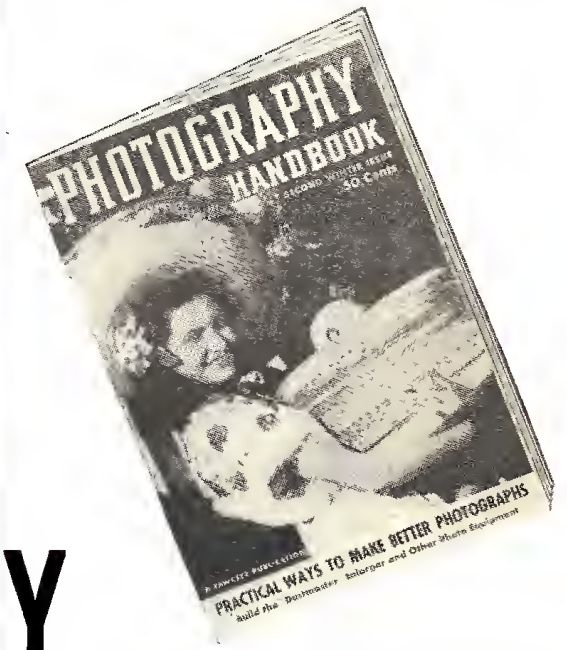

YOU can now get your copy of PHOTOGRAPHY HANDBOOK No. 5—the latest edition of the most practical and useful of all photo publications. Every phase of photography is covered in simple, entertaining style. Only 50 cents, post paid.

Darkroom addicts will be tickled with such articles as "New Twists On Distortion" and "Terrific Effects With Trick Photos." If you are interested in portraiture, "Informal Portraiture in a Flash" and "Portraiture by Penmanship" is for you.

The PH "Dustmaster" Enlarger is the most novel and efficient enlarger ever presented in this publication. It is easy and inexpensive to build.

You won't want to miss the Camera Quiz that will test your photographic I. Q., and dozens of other ideas and practical suggestions for making better photographs; darkroom and studio helps; plans for camera accessories, etc., etc. Plus a Pictorial Salon of thrilling, spectacular photographs.

CUT OUT AND MAIL TODAY!

Fawcett Publications, Inc., MI-2
Greenwich, Conn.

Enclosed find money order, check or stamps. (No coins.) Please send me, postpaid, a copy of PHOTOGRAPHY HANDBOOK No. 5.

Name .....

Address .....

City..... State.....

WORLD FAMOUS • STANDARD MAKE
TYPEWRITERS
as Low as $26.90
10 DAY TRIAL
No Money Down
EASY TERMS
as low as 50¢ a week
YOUR CHOICE—UNDERWOODS! ROYALS! REMINGTONS! L. C. SMITHS! WOODSTOCKS! As low as 1/3 mfrs. original price. Typewriters that cast up to $110.00—some as low as $26.90. Genuine, standard, full sized rebuilt office models—up-to-date improvements—standard keyboard, back spacer, ribbon reverse, 2 color ribbon, etc. Never before such rock-bottom prices! FULLY GUARANTEED! Backed by 20 years of fair dealing. Ten day trial. Easiest terms in history—as low as 50c a week. FREE big price slashing catalog shows all makes in colors, details on 10-day trial and easiest terms. FREE Van Zandt Touch Typing course with your typewriter. See catalog before you buy. Mail coupon now while stock is complete.
INTERNATIONAL TYPEWRITER EXCHANGE
231 W. Monroe St., Chicago, Ill. (Dept. 205)
Send Free Catalog in colors showing late model standard Typewriters at tremendous savings with no money down and 10 days' trial.
Name.....Address.....
Town.....State.....

NOW! World's Smallest Real Performing RADIO
BEAUTIFUL — PLASTIC — CABINETS
Midget radio fits your pocket or purse. Weighs only 4 ozs. Smaller than cigarette package! Receives stations with clear natural tone. NO CRYSTALS to adjust—NO UPKEEP—only one moving part. "TUBELESS, BATTERYLESS!" ENTIRELY NEW PATENTED DESIGN. Has enclosed geared luminous dial for perfect tuning. Many owners report amazing reception and distance. ONE YEAR GUARANTEE! Sent complete ready to listen with instructions and Tinyphone for use in homes, offices, hotels, boats, in bed, etc. TAKES ONLY A SECOND TO CONNECT—NO ELECTRICITY NEEDED!
SEND NO MONEY! Pay postman only $2.99 plus postage on arrival or send $2.99 (Check, M.O., Cash) and yours will be sent complete postpaid. A most unusual value. ORDER NOW!
MIDGET RADIO CO., Dept. M-2, Kearney, Nebr.

LIGHTS ITSELF
SELLS ITSELF
Quick Action (1940) Perfected SELF STARTING LIGHTER
Lights cigar, cigarette or pipe—instantly. Never fails. Improved principle in ignition. No flint. No friction. Send 25c for sample and money-making sales plans.
NOW RETAILS 25c
Start now. You can make up to $5 a day.
NEW METHOD MFG. CO.
Mfgrs. of No Flint Automatic Gas Lighters
Box M-86, Bradford, Pa., U. S. A.
Lights Easily in The Wind
PACKED IN DISPLAY BOX
25c Retail
Doz. $ 1.75
Gross $18.00

NEW TYPE CHEAP OIL BURNER
Sweeping the Country!!
COOK and HEAT Without Coal or Wood
In Your Present Stove or Furnace—HOTTER No Drudgery, Dirt or Ashes—More Heat Quick at SMALL COST.
OVER 40,000 SOLD
Amazing oil burner burns cheap oil a new way, without pre-generating or clogging up; quick intense heat at TURN OF VALVE.
AGENTS Salesmen BIG MONEY
Slips into Any STOVE RANGE or FURNACE.
SENT ON TRIAL Prove its efficiency, convenience and economical operation. GUARANTEED. Write for
FREE BURNER OFFER to agents who will demonstrate and take orders—be first to learn how to end drudgery, dirt and ashes of coal and wood and make big money, spare or full time—mail 1c postcard today.
UNITED FACTORIES, B-600 Factory Building, Kansas City, Mo.

Antelope Ornament

[*Continued from page* 104]

How the dead wood between the legs is removed by the simple use of a rip saw. Protect the wood from the jaws of the vise by means of scrap pieces.

the marks of the dowels on the base; then drill at these locations with a ⅛" drill. Apply glue and force the dowels into these holes and check the figure for vertical alignment. Screw on the bottom base piece and allow the glue to set and also give the base a coat of varnish.

When the first coat is dry, sand off again with very fine sandpaper and varnish again. Now when dry, mix some powdered pumice in oil and rub all over. Again varnish. Mix some rotten stone in oil and rub all over. This is the last step, so do this thoroughly. Wipe off all excess and then wax with furniture wax.

Glue a piece of felt to the base and the piece is ready to grace the radio, mantel or den.

Dr. Marston T. Bogert, recipient of the Priestly Medal, the highest award of the American Chemical Society, predicts that the day is in sight when, if necessary, our food could consist of capsules or pills of concentrated, scientifically correct synthetic nutrients, although at present this would be too expensive.

A stretched rubber band snaps at 204 miles an hour, as measured by ultra-high-speed motion pictures recently taken in a chemical laboratory.

N.A.C.A. Laboratories Seek 600-Mile-An-Hour Airplane

Just in case you do not believe this is a speed-mad age, come down to a unique aeronautical laboratory at Langley Field, Va., where the world is in a 600-mile-an-hour whirl.

You may wonder at the wisdom of going so fast, but it's exciting and breathtaking anyway—even to the skeptic who doesn't want to go from New York to Los Angeles in four and a half hours. It's 19 wind tunnels, a dozen laboratories. It's 200 engineers and almost as many research projects driving ever harder at catching up with the speed of sound.

As transatlantic cables flash word of new speed records and of military planes in Europe so fast they can almost race a rifle bullet, Langley Memorial Aeronautical Laboratory, Uncle Sam's little known air research center, is turning more and more of its attention to extreme high speed flight. Its engineers are verbally tossing hundreds of miles an hour around as never before.

The wing for a 500-mile-an-hour airplane, which will probably make its debut within two years, has already been born here. Still more startling developments of a similar nature are on their way.

From the laboratory, operated by the National Advisory Committee for Aeronautics, have come in the past hundreds of developments that have boosted airplane speeds to their present level, and with them have come means for making airplanes safer and more reliable. But the public will be hearing less of the latter phases of the Committee's activities in the next few months as an air force expansion program preempts the attention of Langley Field scientists. They, more than anyone else in the United States, must see to it that this air force is based on knowledge that will make it better than any other in the world.

A few years ago the famous N. A. C. A. cowling, to fit around projecting cylinders of air-cooled radial engines, was perfectly satisfactory for all existing planes. But within the last year the trend toward higher speeds has forced the laboratory scientists to re-do the earlier job and produce a cowling suited for the speediest Army pursuit ships fitted with radial power plants.

Exact studies of costly flush riveting have been worked out also, so that designers in the great aircraft plants may know how much additional speed can be gained. The speed-seeking N. A. C. A. scientists have even investigated the effect of seemingly slight surface irregularities on wings and found that smoothing them out adds to speed. The effects of different kinds of coating—bare, lacquered, painted—have also been studied with this same end in mind: hatching in five or six years' time the 600-mile-an-hour airplane. Because, even if a ten-mile-a-minute clip seems a little fast to you and me, it isn't to the men piloting America's national defense on the Front Aloft.

MADE $1025.00 in 9 Months with the

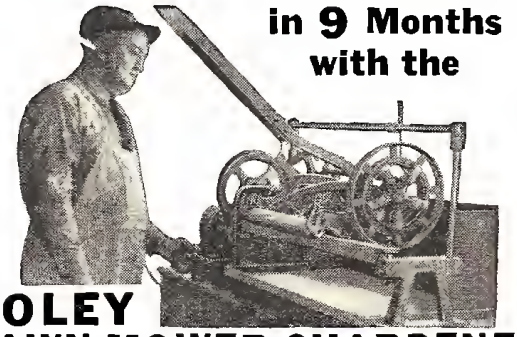

FOLEY LAWN MOWER SHARPENER

"A substantial increase in grind jobs each year, proves beyond any doubt that Foley Grinders do very satisfactory work. We have ground 723 mowers since February 1 to date. November 9. Our total receipts on lawn mower service alone during that period has grossed us $1,025.00. The prevailing price of grinding and adjusting service is $1.00 and $1.25—repairs and parts extra."—W. A. Tulip, Phoenix, Ariz.

You Too Can Make Big Money

Free plan tells you how to start. The Foley Lawn Mower Sharpener turns out perfect work quickly and easily, no experience needed. Simply put the mower in the machine and turn on the power. Uses same system as lawn mower factories. Sharpens all sizes and types in 15 or 20 minutes.

Special Offer: Attachment for grinding axes, hatchets, knives, etc., included FREE with Foley Lawn Mower Sharpener on our Special Offer, brings you business the year around. Send coupon today.

FOLEY MFG. CO. 215-40 Foley Bldg., Minneapolis, Minn.

Send Free Plan for making money sharpening lawn mowers, and Special Offer on the Foley Lawn Mower Sharpener.

NAME_____

ADDRESS_____

SpeedWay DRILL $7.95 GRINDER $5.95

...products of Speed Way, for 30 years manufacturers of electric tools. Specially wound high torque 110 V universal tool motors. Improved designs, correct speeds. 1000 RPM **Drill** with die cast handle has ¼" capacity in steel. 20,000 RPM **Hand Grinder** has speed essential for efficiency and collets for both 1/8" and 3/32" arbors. **Drill** and **Grinder** sold singly or together with 5 accessories in fitted Steel Kit. **Stand** takes either drill or grinder. **Router Frame** converts grinder into router. **Bench Grinder** is complete with motor. Write for Circulars.—**Speedway Mfg. Co. 1860 S. 52nd. Av., Cicero, Ill.**

SYNCROS SAW *Safely!*

Syncro Jig Saws are splendid tools which will enable you to make toys, games, furniture and models. With a Syncro Saw the most intricate designs and patterns may be followed very easily. Plenty of zip and power to cut wood up to ¾" thick. Countless hours of fascinating enjoyment are yours with a rugged, portable, durable Syncro Saw. *A feature of the saw is the fact that it is impossible to accidentally injure yourself.*

3 Models to choose from

Syncro Junior . . $4.95
Syncro Power Saw $9.95
Syncro Deluxe Power Saw $12.50

Send for catalog C. N. Y. office, 200-5th Ave.

SYNCRO DEVICES INC. 747 BEAUBIEN ST. DETROIT

Classified Advertisements

Rate for classified ads, 15c per word (include name, address and all numbers), per insertion. Minimum 10 words. Cash must accompany order and be received in this office January 1st for the March issue (on sale January 31st). Address Classified Mgr., Mechanix Illustrated, 1501 Broadway, New York City.

A. C. GENERATORS

110 AC AUTOMOBILE fan belt generators. Easily installed, perfect performance. Operates amplifiers, movies, etc. LeJay Manufacturing, 114 LeJay Building, Minneapolis, Minnesota.

ADVERTISING AGENCIES

ADVERTISE: 24 words, 149 newspapers $6.50. Lists Free. Advertising Bureau, 4515-B Cottage Grove, Chicago.

500 ADVERTISING Ideas, Slogans, Phrases, 25c. Daniels, Advertising Counselor, South, Statesville, N. C.

40 WORDS displayed, 65 magazines, 3 months, $2.00. Bagley Service, Box 2522, Portland, Ore.

33 WORDS 25 magazines $2.00. Goodall, 628 Montgomery, San Francisco.

AGENTS WANTED

1000 BARGAINS. School supplies. Drug sundries. Razor blades. Food products. Punch boards. Carded goods. Dry goods. Novelties. Cosmetics. Soaps. Cutlery. Notions. Shoes. Radios. Ladies' hose. Lingerie. Toys. Terrific values. Free Catalog. Reliable Jobbers, 930 Roosevelt, Dept. C2, Chicago.

AGENTS: Smash go prices! Santos Coffee 12c lb. 4-oz. Vanilla 8½c. Razor Blades 10 for 8½c. 100 Sticks Chewing Gum 12c. 150 other bargains. Premiums. Experience Unnecessary. Carnation Company, MN, St. Louis, Mo.

WANTED: Men—Women to supply Blair Food and Household Products to homes. Deep Cut Prices and lovely Premiums. Send no money. Big Box of Products Free for testing. Blair, Dept. 63-T, Lynchburg, Va.

BIG Money Applying Initials on Automobiles. Easiest thing today. Free samples. Also, sideline salesmen for short order Decalcomania Name Plates. "Ralco," 1305 Washington, Boston, Mass.

PROFIT with new products. Make, sell, repeat. Analysis. Research. Guaranteed formulas. Biggest catalog free. Nominal prices. Gibson Laboratory, Chemists, CE-1142 Sunnyside, Chicago.

STRANGE Chemical Sponge cleans wallpaper like magic. Banishes housecleaning drudgery. Sensational demonstration. Samples sent on trial. Rush name. Kristee 115, Akron, Ohio.

MAGIC disc heats water without gas, coal or oil. Tremendous seller. Big profits. Pocket samples for agents. Rush name for Free Offer. Nuway, Dept. X-622, Des Moines, Iowa.

SELL—New Patented Tool for opening Pastehoard Boxes. Sells on sight to all merchants. Speciman 30 cents—Low quantity price. C. A. Babb, South Main Street, Fostoria, Ohio.

BRAND New Item for agents, salesmen. Just out. Sells on sight. Every man needs 3 to 12. Rush name for money-making offer. Remark Mfg. Co., Dept. 17, Butler, Ind.

AGENTS—Opportunity make money; book containing 127 successful business plans; home-office; send for free introductory booklet. Elite Co., 214-G Grand St., N. Y.

WHERE To Buy At Wholesale 500,000 articles. Free Directory and other valuable information. Maywood MM. Publishers, 1107 Broadway, New York.

AFTERNOONS Free! Work home! $2,000 month reported (exceptional—fulltime). Expect surprise! National-X, BX1240, SanBernardino, California.

BIG money applying initials on automobiles. Write for particulars and free samples. American Letter Company, Dept. 11, Dunellen, New Jersey.

CAR-OWNERS To Put Up Our Signs. Fine Offer For Anyone Traveling. (Not For Kids.) Get Details. Atlas Sign Works, 7941-G Halsted, Chicago.

BUSINESS Proposition Resilvering Mirrors, Autoparts, Reflectors, Making Chipped Glass Signs. Write Sprinkle, Plater, 850, Marion, Indiana.

SALESMEN: Guaranteed. Cameras, Electric Shavers. $3 each ($10 values). Murray, 382—Fourth Ave., Troy, New York.

MEXICAN Curios sell on sight. Large profits. Free particulars. Samples 10c stamps. Marquez-MC Apartado, Mexico City.

300% PROFIT Selling Gold Leaf Letters for Store Windows; Free Samples. Metallic Co., 448 North Clark, Chicago.

SELL Soap. Make it yourself. Learn at home. No machinery needed. Posera, 4545-B, Bartlett, Milwaukee.

AMERICAN POLICE JIU JITSU

36 KNOCKOUT Blows without use of fists by internationally famous Jiu Jitsu instructor. Send 25c. S. J. Jorgensen, 285 Maritime Bldg., Seattle, Wash.

ART MAGAZINE

25c ART Magazine free. Send 9c postage. Professional Art Magazine, Madison, Wis.

AUTOMOBILES & MIDGET CARS

MIDGET supplies, new or used. Bargain lists—130 used motors, midgets, parts—20c. Circulars free. Midgets, Box 543-B, Zanesville, Ohio.

AUTO SUPPLIES & EQUIPMENT

CONVERT your car to burn Diesel oil. Save up to 70% fuel costs. Cheap installation. Wonderful performance. Proven factory method. Different and better. Costs nothing to investigate. Write for free circular No. 5A. Harrington Company, 201-204 Manchester Building, Portland, Oregon.

AVIATION

GET Into Aviation! Wonderful opportunities open! Big money paid! Prepare at this Lincoln Government Approved School for position as Pilot, Mechanic or Aeronautical Engineer. We assist Graduates in locating positions. Part-time employment for board and room while training. Write today for complete information. Lincoln Airplane & Flying School, 4004 Aircraft Bldg., Lincoln, Nebraska.

SPORT Plane, new design, tapered wing, large cabin, over 100 mi. per hr., with 30 H.P., cheap and easy to build. Shop blue prints and finance plans, first time offered. Send 50c for large three view drawing and information, money refunded with purchase of plans. E. Hackbirth, Butler, Indiana.

PROPELLERS for airplanes, ice sleds, snow sleds, boats, dehydrators, Hubs countershafts, snow sled skis. Catalog 10c. Banks Propellers, Hangar #4 Love Field, Dallas, Texas.

AVIATION Apprentices—Airminded Young Men interested in training for entering Aviation as Apprentices see ad on page 28.

BABY CHICKS

COLONIAL Chicks low as $5.40 per 100. World's largest hatcheries. Leading Breeds. Also Sexed and Hybrids. Big Chick Almanac Free. Colonial Poultry Farms, Box 1004, Pleasant Hill, Mo.

BOATS, OUTBOARD MOTORS, ETC.

GENUINE New Evinrude and Elto outboard motors now as low as $26.50 (plus small transportation charge). Down payment as low as $6.00. Fifteen advanced 1940 models to choose from. Write for catalogs, boat directory and handy Boat-&-Motor Selector—all free! Address, Evinrude Motors, 4296 N. 27th St., Milwaukee, Wis.

OWN a fine Boat at a great saving. Build a Welch Boat. We supply all materials cut to shape for Skiffs; Rowboats; Runabouts; and Cruisers. Send 10c for a 32 page catalog showing Boats, Marine Supplies, etc. Welch Boat Company, Station K-2, Milwaukee, Wisconsin.

FORD and Zephyr marine conversions. 10c coin. Lehman Engineering Company, Dept. C, Newark, N. J.

BOOY-BUILDING COURSES

EXERCISE equipment, courses. Special offers! Free booklet. Good Barbell Co., Dept. 10, Reading, Pa.

BOOKS & PERIODICALS

JUST Off the Press! The all-new edition of HOW TO BUILD IT, packed full of fresh projects for the home workshop, is now available at only 50 cents, postpaid. Valuable for beginners and experts alike. Dozens of simple, easy-to-make plans for power bikes, water skiis, lamps, electrical and radio projects, metal working, etc., etc. Send money order, check or stamps to Dept. C-1, Fawcett Publications, Inc., Greenwich, Conn.

SAVE Money! Do your own repair work around the house without calling in professional help. HANDY MAN'S HOME MANUAL tells you how. This 144-page book is full of easy how-to-repair, how-to-make, and how-to-improve kinks. Written in simple language. Illustrated. Only 50 cents. Send money order, check or stamps to Dept. C-1, Fawcett Publications, Inc., Greenwich, Conn.

EXCELLENT Sparetime profits taking subscriptions—2500 Magazines. Agents Confidential Catalogue. Complete Starting Supplies Free! Dept. 212, Pines, 583 Monroe, Brooklyn, N. Y.

MAGAZINES—Thousands half price. List free. Book & Magazine Mart, Hutchinson, Kansas.

BUILD IT YOURSELF

BUILD power Scooters, Midget Cars. We supply tires, wheels, motors. Lowest Prices. Send 10c for plans, etc. Bild-Ur-Own Devices, Dept. 2-D, 536 North Parkside, Chicago.

No Scissors Needed with this Thimble

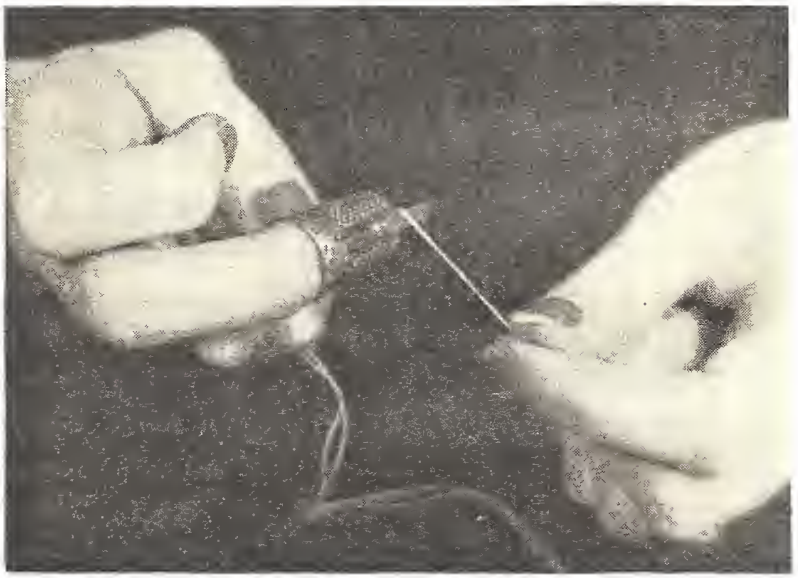

A novel thimble has a handy blade attachment built into it, which makes thread cutting quick and easy. There is a small projection at the top of the blade so that it can be moved in and out with the thumb.

HEAT with drain oil. Build cheap new type safe burner. Plans $1.00. Sunnyslope Welding & Machine Shop, R. 5, Box 275½, Waukesha, Wis.

MOTORSCOOTERS, Midget Cars! Easily built. Complete plans and literature on wheels, tires, motors, etc., 10c. Housaker, Masontown, Pa.

BUSINESS OPPORTUNITIES

PLASTEX Industry needs manufacturers on small scale and for big production of Art Goods and Novelties in Plastex and marble imitation. Cheaply and easily made in our guaranteed rubber moulds. We are now placing big chain store orders with our manufacturers. You are just in time for big wholesale season now starting. Interesting booklet mailed free. Plastex Industries, Dept. R, 1085 Washington Ave., New York.

FREE Amazing Folder about Artificial Marble Flooring. Covers Wood or Cement Floors. Fireproof. All colors. Low Cost "Ornamental Casting"—Concrete—Plaster—Statuary—Garden Furniture — Flexible Molds — Liquid Marble. Creative Publishers, M, 1, Glencoe, Illinois.

WE HELP start you in business, furnishing Outfits and Instruction, operating "Specialty Candy Factory" home. Men—women, opportunity to earn good steady income, all or spare time. (Our 31st year.) Booklet free. Ragsdale Candies, Drawer 110, East Orange, N. J.

COLOR Concrete with chemicals. Stucco-rock. Cement Artistry. Benches. Wishing-wells. Spin concrete pottery. Miniature castles, water-mills. Cold-glaze, water-paints, marbling. Sample 10c. Hollywood CementCraft, 8528 Wonderland, Hollywood, California.

YOU'LL Like Resilvering Mirrors, Autoparts, Reflectors, Making Chipped Glass Signs. Write Sprinkle, Plater, 845, Marion, Indiana.

MAKE Artificial marble, glazed tiles, uncanny. Tabletops, plaques, floors, hones, novelties. Hard, fireproof, inexpensive, cement secrets. Brilliant tile and liquid rubber samples 3c. John H. Payn, 945 Grande Vista Avenue, Los Angeles, Calif.

MAIL Order business course will show you how to make money, spare or full time. Teaches professional mail order technique; not penny-catching schemes. Write for Free details today. Nelson Co., B-405 Manhattan Building, Chicago.

MANUFACTURE for us, or sell direct to homes, factories or public institutions; a new invention, made from used tin cans, Retails for 50c, Information and sample $1.00. Albright Specialty Co., Burbank, Calif.

MANUFACTURE from Phospholene. Cleaning fluid 1c gallon; bleach 2c gallon; hand soap 2c pound; and ten fast sellers. Sample 25c. Details free. Western, 402 Climax Bldg., Cleveland, Ohio.

AFTERNOONS Free! Work home! $2,000 month reported (exceptional—fulltime). Also War Time Plan. Expect surprise! National-W, BX1240, SanBernardino, California.

GOOD Paying Business silvering mirrors, plating autoparts, reflectors, bicycles, bathroom fixtures by late method. Free particulars and proofs. Gunmetal Co., Ave. A, Decatur, Ill.

IF YOU are looking for a chance to devote your spare or full time to profitable work see our offer on page 30. Metal Cast Products Co., 1696 Boston Road, New York City.

SUCCEED With Your Products. Make—Sell Them. Formulas. Processes. Accurate Analyses. Catalog Free. A. Thaxly Co., Washington, D. C.

FOR an Extremely Profitable lifetime business, operate a Collection-Credit agency. Free folder. Cole Associates, Dept. I, Syracuse, N. Y.

107 WAYS to make money, in home or office, business of your own. Full particulars free. Elite Co., 214-G Grand St., New York.

QUICK Income! Fast-growing business creates lasting independence; no canvassing. Service, Drawer 339-12 Butte, Montana.

FREE Literature describes hundreds plans for making money locally and by mail. Gilbert Supply, 5-M West 24th, New York.

START you in business. Popcorn Machines. Potato Chip Outfits. Long Eakins, 2065 High St., Springfield, Ohio.

AGENTS—To mail our literature. Good profits. Home business. M. Maywood, 1107 Broadway, New York.

SELL by Mail! Books, Novelties! Bargains! Big profits! Particulars Free! H. Elfco, 438 North Wells, Chicago.

SOAP Making. Learn at home. No machinery needed. Posera, 4545-F Bartlett, Milwaukee, Wisconsin.

HOW And Where To Obtain Capital. Fully explained particulars free. Star Service, Wapakoneta, Ohio.

RUBBER Molds—Make yourself. Formulas, instructions 25c. Kemixal, Parkridge, Illinois.

MAKE 900% profit operating your own business. Write, H. Moore, Sutton Rd., Millbury, Mass.

$100 MONTHLY sparetime. No canvassing. Diamond Press, B8, Johnston City, Ill.

CAMERAS & PHOTO SUPPLIES

CAMERAS and supplies. Free illustrated catalog listing everything photographic—still and movie cameras, films, lenses—at tremendous savings. Hundreds of bargains, new and used. All guaranteed. We take your old camera or equipment in trade. Write now for your free copy of our newest money-saving bargain hook—just out! Limited edition. Hurry! Central Camera Co. (Photographic Headquarters since 1899), 230 S. Wabash, Dept. B-11Z Chicago, Ill.

Tiny Diesel Engine Is Economical

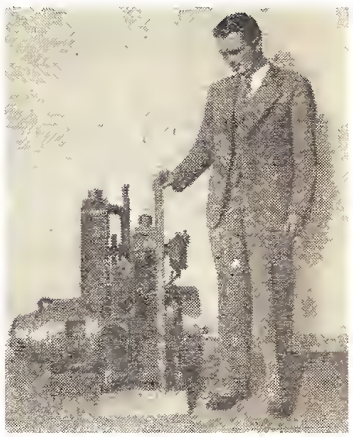

This tiny diesel engine operates small machines economically, using only 0.48 pounds of fuel per horsepower per hour. The fire hazard is eliminated, due to the low point of combustion of the fuel.

Jar Wrench Handy Tool for Kitchen

A jar wrench for loosening and tightening tops of jars performs several other operations, including opening cans and sharpening knives. It is made of steel and is about seven inches long.

PHOTO FANS! Here's a bargain book that will help you take, develop and enlarge better pictures. PHOTOGRAPHY HANDBOOK No. 4 contains scores of articles and tips on all phases of picture-taking. Fully illustrated, 144 pages, written by experts—and only 50 cents, postpaid. Send money order, check or stamps to Dept. C-1, Fawcett Publications, Inc., Greenwich, Conn.

MAKE Money in photography. Learn quickly at home. Easy plan. Previous experience unnecessary. Common school education sufficient. Interesting booklet and requirements free. American School of Photography, 3601 Michigan Avenue, Dept. 2049, Chicago.

CHEMISTRY

CHEMISTRY Course (Slightly Soiled) at bargain. Particulars. F. Shapereau, 620 E. 8th St., Brooklyn, N. Y.

DETECTIVES

DETECTIVES. Make Secret Investigations. Experience unnecessary. DETECTIVE Particulars free. Write, George Wagner, 2640-V Broadway, N. Y.

BECOME a Detective. Opportunity to Earn While Learning. Free Detective particulars. Raymond Stults, Bristol, Indiana.

EDUCATIONAL & INSTRUCTION

WATCH Repairing is steady profitable work. Experts usually in demand. You can learn watchmaking trade at home, spare time. New original instruction system. Script engraving course included. Write for free details today! Nelson Co., B-2202 Manhattan Building, Chicago.

1940 GOVERNMENT Jobs. Many appointments expected. $105-$175 month. Prepare immediately, at home, for next examinations. List positions Free. Write today. Franklin Institute, Dept. A49, Rochester, N. Y.

DRAFTING Jobs often pay $175.00—$500.00 month. Qualify now. Details Free. Write Monroe Institute, ML-102, Alton, Illinois.

ELECTRICAL SUPPLIES & EQUIPMENT

ELECTRO-SCRIBE: Electric Pencil. Writes—Engraves all Metals $1.00. HEALTH LAMP: Dual Ray—Ultra Violet—Infra Red—Promotes Sun-Tan-Vitamin "D"—Automatic AC-DC Current, $3.90. Details. Beyer Mfg. Co., 4515-G Cottage Grove, Chicago.

ELECTRIC FENCING

BIG Money building—selling Electric Fencers. Tremendous demand. Lowest wholesale prices. Free Information. Hughes, 5 Miami, Terracepark, Ohio.

ELECTRIC Fencer easily made from old automobile coil. Complete plans 10c. LeJay Manufacturing, 914 LeJay Building. Minneapolis, Minn.

ENGINES, MOTORS, ETC.

MOTOR Winding data. Introductory selection single and three phase, $1.00. Motor Data Service, Box 7631, Kansas City, Mo.

FOR INVENTORS

PATENTS—Before too heavy an outlay of time or money is made on an invention, a search of the Patent Office records should be made to determine as nearly as possible whether or not the same idea has been patented before. The cost of this search is small, while the value of the facts it uncovers is often considerable. We offer inventors and manufacturers a thorough, prompt, confidential search service—plus experienced counsel and assistance in every phase of Patent and Trade-Mark practice. Write for our new free book containing valuable information relating to patent procedure. Clarence A. O'Brien, Registered Patent Attorney, Dept. OB3A, Adams Bldg., Washington, D. C.

INVENTORS: Sell your unpatented invention with positive safeguards under patent laws. New low-cost procedure. Complete details, free. American Patents Corporation, Dept. 5-E, Washington, D. C.

WE LOCATE buyers meritorious patented, unpatented inventions. If will sell, reply immediately. Descriptive booklet, references, free. Invention Reporter, 4A-11236 South Fairfield, Chicago.

WE SUCCESSFULLY sell inventions, patented and unpatented. Write for proof, and tell us what you have for sale. Chartered Institute of American Inventors, Dept. 5-B, Washington, D. C.

INVENTORS: Send for my free 72-page book. Conscientious, prompt personal service on all patent matters. Registered Patent Attorney, L. F. Randolph, Dept. 341, Washington, D. C.

GET Your Own Patents. Legal blanks, complete instructions $1. Cudding Sons, Campbell, California.

FORMULAS, PLANS, ETC.

ANALYSIS. Research. Newest guaranteed formulas. Biggest catalog free. Nominal prices. Gibson Laboratory, Chemists, CE-1142 Sunnyside, Chicago.

THAXLY Formulas for perfect products. Accurate Analyses. Catalog Free. A. Thaxly Co., Washington, D. C.

FORMULAS. Latest Money Makers. Literature free. D-Belfort, 4042 N. Keeler, Chicago.

FORMULAS—All Kinds. Guaranteed. Catalog Free! Kemico, 67 Parkridge, Illinois.

HELP WANTED

SALARIED Positions; $2,500 yearly and up. Let us try to get one for you; small cost. Write for valuable information No. M-O. M-4. Executive's Promotion Service, Washington, D. C.

HOME CRAFTSMAN

LAWN Ornaments . . . easy to make. 20 full size patterns, birds, animals, etc., 25c; Dutch Boy, Dutch Girl, Sprinkling Girl, Fox Terrier, Scotties, Bulldog, 15c each, any two 25c; Dutch Windmill, 36 inches high 25c. Entire collection, 27 patterns, $1.00 postpaid. Wickman Co., Dept. 116, Dayton, Ohio.

PATTERNS:—Plywood Novelties—Silhouettes. Lowest prices transfer decorations. Also 236 miscellaneous projects. Superbly illustrated literature. Write: Wo-Met Shop, Ashburn, Georgia.

VENETIAN Blind Supplies—Literature upon request. For samples include 6 cents in stamps. Homecraft Supplies, Aurora, Illinois.

22 FULL Size lawn ornament patterns 25c coin. Strother, Box 383-A-O, Belington, West Virginia.

HYPNOTISM

HYPNOTISM. Complete 20 Method Course 25c. Western Institute Hypnotism, MM-2984 North Ridgeway, Chicago.

INVENTIONS WANTED

INVENTIONS of merit wanted, patented or unpatented. Proof of disclosure furnished. Write for bulletins. R. & S. Engineering Co., Dept. CI-2, 17 East 42nd Street, New York City.

SMALL Inventions wanted by manufacturers. I'll help you sell your invention. Write for free circular. Stanley Hull, 7829-L Euclid Avenue, Cleveland, Ohio.

WANTED—Meritorious patented, unpatented inventions. Booklet, reference, free. Invention Reporter, 4B-11236 South Fairfield, Chicago.

INVENTIONS Promoted. Patented or Unpatented. Write Adam Fisher Co., 582 Enright, St. Louis, Mo.

JEWELRY, WATCH MATERIALS & REPAIRING

WATCHMAKERS' Materials—Tools—Watches—Jewelry—Bought, Sold, Exchanged. Ben Segal's, 59 East Madison, Chicago.

MAGIC TRICKS, PUZZLES & JOKER NOVELTIES

604 PAGE 1940 Catalog, 7000 novelties, 400 illustrations, sporting goods, hobby kits, bargain cameras, optical goods, watches, luck jewelry, knives, rifles, revolvers, movie projectors, books, musical instruments, radio novelties, puzzles, joke goods, magic, auto novelties, bicycle novelties, etc., 3c. Johnson Smith, Dept. 314, Detroit.

500 MAGIC Tricks in wonderfully Illustrated Catalog only 10c! Professional Catalog 10c. Lyle Douglas, Station A-3, Dallas, Texas.

NEW, Giant Magic Catalog! Hundreds of items! Send 25c! Chicago Magic Company, B-2300, Mason, Chicago.

ENTERTAIN with Magic! Catalog 500 easily learned Tricks 10c. Professional Catalog 10c. Lyle Douglas, Station A-3, Dallas, Texas.

LEARN Ventriloquism by mail; small cost, 3c stamp brings particulars. M. C. Smith, 801 Bigelow, Room S764, Peoria, Ill.

AMAZE and Mystify! Catalog 500 Pocket-Parlor Tricks 10c. Professional Catalog 10c. Lyle Douglas, Station A-3, Dallas, Texas.

WE SUPPLY every noted magician. Large Professional catalog 25c. Holden, 222 West 42nd St., New York.

Circular Electric Flatiron

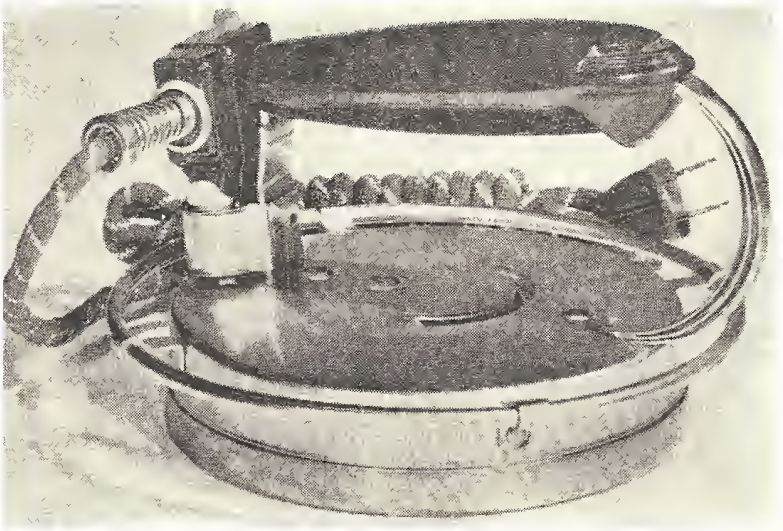

Ironing is easier, quicker and smoother with this unique circular flatiron because the flat, round-edge sole does not cause creases or wrinkles that have to be gone over a second time. The heat indicator under the handle shows the proper heat for each fabric. The on-and-off switch is on the back of the handle.

SEND 3c stamp for catalog of tricks and jokers novelties. Clifford Leerhoff, Parkersburg, Iowa.

ELECTRIC Fun! 200 stunts 110 volts, $1. Cudding Sons, Campbell, California.

MALE & FEMALE HELP WANTED

M. M. EARNED $267, three weeks, raising mushrooms in cellar! Exceptional, but your cellar, shed perhaps suitable. We buy crops. Book free. United, 3848 Lincoln Ave., Dept. 90, Chicago.

MANUFACTURING

INVENTIONS—Manufactured in any quantity by old established company. Metal Specialties, attractive plastics, models, dies, moulds, drawings, etc. Free estimates. Send for catalog. Crescent Tool Company, Dept. T, Cincinnati, Ohio.

INVENTIONS developed and manufactured in any quantities. Low cost. Models built. We specialize in plastics. Stampings, tools, dies. Write for bulletins. R. & S. Engineering Co., Dept. CM-2, 17 East 42nd Street, New York City.

MISCELLANEOUS

ALASKAN, Gold Nuggets, for Gifts, or Souvenirs, from a Prospector, $1.00, $2.50 and $5.00. M. Shimrock, Manley Hot Springs, Alaska.

RECEIVE gigantic mails, magazines, samples. Your name in numerous mailing lists 10c. Waltman, 460 Grand Street, New York.

BURIED TREASURE, Minerals, free booklet, photographs. Fisher, Palmer Bldg., Hollywood.

REPORTERS Press Cards; 25c. Caswell, 2121-6th Avenue, Altoona, Penna.

MODEL RAILROADING

BUILD a Model Railroad in 00 gauge (¾ inch between rails). A complete catalogue of parts, construction kits, and completed units. Complete Catalogue 25c. Nason Railways, P. O. Box 9, Mt. Vernon, N. Y., Dept. 2X.

MONEY MAKING OPPORTUNITIES

M. M. EARNED $267, three weeks, raising mushrooms in cellar! Exceptional, but your cellar, shed perhaps suitable. We buy crops. Book free. United, 3848 Lincoln Ave., Dept. 84, Chicago.

GET Big Mails—Samples Galore. Your name listed in Midstates Mail Trade Directory, copy sent you, Directory 500,000 articles wholesale, 10c. Eagle, 414-M W. 65th, Chicago.

1000 LOCAL or mail order money making Ideas. Literature Free. Write to Box 201, Somerset, Colorado.

MOTION PICTURE & SOUND EQUIPMENT

100 FEET 16MM $1.75. Used Model A-7 Keystine Camera. Like New. $35.00. Savarese, Woodcliff Lake, New Jersey.

MOVING Pictures, Art Film, sample 10c. Many others, lists free. Goodwill Company, Jackson, Tennessee.

MOTORCYCLES, BICYCLES, MOTOR SCOOTERS & SUPPLIES

MOTOR marvel ready! Mead's sensational new Ranger Scooter goes 120 miles per gallon, 35 m.p.h., ride, rent or sell for profit, pleasure. Dealers, Agents write for Special Introductory Offer, Easy Terms, Free Circular. Hurry! Mead Cycle Company, Dept. B-3, Chicago, Ill.

MOTORCYCLES, reconditioned. New, used, parts and accessories. All makes. Large stock. Bargains. Illustrated catalog, 15c. Indian Motorcycle Sales, Kansas City, Mo.

MUSIC—INSTRUMENTS & INSTRUCTION

RECORDING Songs, Poems; Dollar Per Minute. Ray Turner, Hotel Beardsley, Chamnaign, Ill.

PIANO by ear. Free booklet. Day-V-Way, 13265 Michigan Ave., Dearborn, Michigan.

PATENT ATTORNEYS

PATENTS—Before too heavy an outlay of time or money is made on an invention, a search of the Patent Office records should be made to determine as nearly as possible whether or not the same idea has been patented before. The cost of this search is small, while the value of the facts it uncovers is often considerable. We offer inventors and manufacturers a thorough, prompt, confidential search service—plus experienced counsel and assistance in every phase of Patent and Trade-Mark practice. Write for our new free book containing valuable information relating to patent procedure. Clarence A. O'Brien, Registered Patent Attorney, Dept. OB3B, Adams Bldg., Washington, D. C.

PATENT ATTORNEY-ENGINEER. Over twenty years engineering experience with patents. Confidential personal services. Reasonable fees. Installments. Prel. information and advice free. Washington Associate. Write a description of your invention, explaining how it works and what its use is. Imagine you are in my office talking to me about it. I will prepare the necessary sketches. Mail description today. Delay is dangerous. David Manly Heller, 134 N. LaSalle, Chicago.

INVENTORS—Before disclosing your invention to anyone send for Form "Evidence of Conception"; "Schedule of Government and Attorneys' Fees" and instructions. Sent free. Lancaster, Allwine & Rommel, 426 Bowen Building, Washington, D. C.

"INVENTOR'S Guidebook" containing 96 mechanical movements and advice about patenting, selling inventions, also "Record of Invention", Free. Frank A. Ledermann, Patent Attorney-Engineer, 154 Nassau Street, New York.

INVENTORS: Send for my free 72-page book. Conscientious, prompt personal service on all patent matters. Registered Patent Attorney, L. F. Randolph, Dept. 763, Washington, D. C.

Easy To Check Pill Supply

The number of tablets he has on hand can be told at a glance by a user of this handy transparent pill box, which delivers one tablet at a time through its gravity chute. It is made of unbreakable bakelite polystyrene.

PATENTS. Booklet free. Highest references. Best results. Reasonable fees. Watson E. Coleman, Victor Building, Washington, D. C.

PATENTS

INVENTORS—Have you a sound, practical invention for sale, patented or unpatented? If so, write Chartered Institute of American Inventors, Dept. 5-A, Washington, D. C.

INVENTIONS Promoted. Patented or Unpatented. Write Adam Fisher Co., 582 Enright, St. Louis, Mo.

PERSONAL

604 PAGE 1940 Catalog, 7000 novelties, 400 illustrations, sporting goods, hobby kits, bargain cameras, optical goods, watches, luck jewelry, knives, rifles, revolvers, movie projectors, books, musical instruments, radio novelties, puzzles, joke goods, magic, auto novelties, bicycle novelties, etc., 3c. Johnson Smith, Dept. 313, Detroit.

WIN Prize Money: Booklet—"Successful Contesting"—shows how, 10c postpaid. Bulletin listing $200,000.00 Prizes included. World Publishers, 4515-K Cottage Grove, Chicago.

MEXICAN-AMERICAN Legal Matters. American Attorney, Box 1736, El Paso, Texas.

PHOTO DEVELOPING

THE Photo Mill. Immediate Service! No Delay! Eight exposure roll developed, carefully printed and choice of two beautiful 5x7 professional enlargements, one tinted enlargement, or eight reprints for 25c coin (U.S.A.). Reprints 2c each. The Photo Mill, Box 629-K, Minneapolis, Minn.

AT LAST! All Your Snapshots in Natural Colors. Roll developed, 8 Natural Color Prints, only 25c. Reprints, 3c. Amazingly beautiful. Natural Color Photo, Janesville, Wisconsin.

"SENSATIONAL Offer." Five 5x7 Enlargements 29c. Cardinal Photos, Summit, N. J.

ROLL Developed, 16 guaranteed prints, 25c. Smart Photo, Winona, Minnesota.

POULTRY

WHITE Australorp Headquarters—Importers World Champion 353—361—364 Egg Black Australorp Hens. Educational Catalog shows Customers Profits. Osborne Farm, Box 71, Holland, Michigan.

MAKE money with poultry. Read America's leading poultry magazine for latest information. Three years $1.00; nine months 25c. Poultry Tribune, Dept. E-94, Mount Morris, Illinois.

PRINTING, MIMEOGRAPHING, ETC.

ATTRACTIVE 2-color shipping labels, business cards $1.00 thousand. Quantities cheaper. Stickers, blotters, Hammermill bond letterheads, envelopes, displays, folders, etc. Cut prices, prepaid. Free samples. Certified Printers, 708-B Madison, Chicago.

125—8½x11 BOND Letterheads and 125 Envelopes, both printed, $1.00 prepaid. Benneville, 907 West Roosevelt, Philadelphia.

100 ENVELOPES Neatly Printed, postpaid, 50c. C. W. Peterson, Stanchfield, Minnesota.

50 SHEETS, 20 Envelopes, 25c Postpaid. Western Stationery, Topeka, Kansas.

100 ENVELOPES printed 2 colors 75c. Press, B-232, Rochester, N. Y.

Finger Pressure Opens New Type Can

A can which is opened by a light tap of the finger may soon eliminate all can openers. When the top is pressed an expansion ring is automatically released and the top disengaged. When replaced, the ring holds tight again, sealing can and contents.

PROFITABLE OCCUPATIONS

COMMUNITY newspaper operated at profit, sample copies, instructions 25c coin. Learn from successful Community News, S. Portland, Box 2233, Maine.

RADIO & TELEGRAPHY

RADIO Engineering, broadcasting, aviation and police radio, Servicing, Marine and Morse Telegraphy taught thoroughly. All expenses low. Catalog free. Dodge's Institute, King St., Valparaso, Ind.

RAZORS, BLADES, ETC.

AMAZING Value! 14k gold plated Gillette razor, 25 blades, 8 oz. jar brushless cream, styptic pencil set, complete 75c. Postage prepaid. G. C. Supply, Box 122, Five Corner Station, Jersey City, N. J.

SALESMEN WANTED

PLACED on Free Trial to Customers Sells Itself. Tremendous Sales Possibilities! Revolutionary Inter-Communication System. Talk to one or as many as ten people, even 2,000 feet away. Loud speaking, back and forth, private conversation. Operates like radio—one electric connection. No servicing or installing problems. Fully guaranteed. Technical experience unnecessary. Easy two-minute demonstration. Thousands prospects—factories, offices, lumber yards, garages, parking lots, restaurants, etc. Accounts receivable carried by factory. Present low price opens big new field. Men earning high as $100—$150 week. Protected territory available. Free Demonstrator Offer. Inter-Communication System of America, 2440 Lincoln Ave., Dept. 1401, Chicago.

SPECTROSCOPES

SPECTROSCOPE quickest way to analyze chemicals, ores $2.50. Cudding Sons, Campbell, California.

TATTOOING SUPPLIES

TATTOOING machines, chrome plated $3.50; also engravers; tubes 50c. Send for photo. Owen Jensen, 412 South Main Street, Los Angeles, Calif.

TATTOOING Outfits, Supplies, Illustrated List free. Percy Waters, Anniston, Alabama.

TAXIDERMY

LEARN At Home, by mail, to mount Birds, Animals, Heads, Fish. Also tan and make furs. Fine hobby. Real Profits in spare time. Write for Free Book. State your age. Northwestern School of Taxidermy, 21 Elwood Bldg., Omaha, Nebr.

GLASS Eyes, Taxidermists', Furriers' supplies. Big Catalog Free. Elwood Company, 234 Smith Bldg., Omaha, Nebr.

TELESCOPES, MICROSCOPES, ETC.

TELESCOPES, Microscopes, Binoculars; 1940 bargain catalog free. Brownscope Co., 5 West 27th Street, New York.

TYPEWRITERS, DUPLICATORS, OFFICE DEVICES

TYPEWRITERS, Adder, Mimeograph, Multigraph, Addressograph. Send for Free lists of machines that will help you at half price. Pruitt, 27 Pruitt Bldg., Chicago.

WELDING

D.C. ARC-WELDER plans $1.00 each (Three for $2.00). Build it yourself without rewinding armature. 25-200 amperes from Farm Light Plant generators. 25-200 amperes from Northeast, Dodge automobile generators. 25-600 amperes from d.c. vehicle motors originally storage battery driven. Welders Club, BB-3432 M-Mart, Chicago. For Sale: D.c. Vehicle motors, low prices; must be sold.

Army Tells Method Of Making Charcoal For Gas Masks

The Army's method of making superior activated charcoal for gas masks out of ordinary wood—a process for the last ten years kept a military secret of the United States—has at last been made public by the issuance of Patent No. 2,162,366 to Major Maurice E. Barker and Chemist Robert S. Brown of the Chemical Warfare Service.

Activated charcoal is the agent in gas masks which absorbs poison gases and filters them from the air. During the World War coconut shells provided much of the raw material for such charcoal but the demands were so great that nation-wide collections were made of peach pits, as many will recall.

By the new Army method America's vast supplies of wood—any wood—can be turned into highly absorptive charcoal granules that will fill gas mask canisters for soldiers and civilians in the next war.

The invention of the Chemical Warfare Service experts, now disclosed, takes two-inch cubes of dried wood, dehydrates them with chemicals, dries them again and finally compresses them under pressures of from 10,000 to 20,000 pounds to the square inch.

The blocks, made dense by the severe squeezing, are then charred at relatively low temperatures in air for 24 hours and then placed in an atmosphere of carbon dioxide and heated slowly to temperatures of 1,472 degrees Fahrenheit. Finally the charcoal cubes are cooled in a carbon dioxide vapor. When finished they are ground into coarse granules ready for use in gas masks.

The gas retention of this special charcoal is about double that obtained by any methods previously known, states the patent.

From the military point of view, explains the Chemical Warfare Service, a charcoal for gas masks must be very, very dense and yet retain the largest possible volume of gas. Ordinary charcoal could be used in gas masks but it might be necessary to carry a bushel of it around to get the necessary effect. The Army's charcoal, in contrast, gets an equal effect with a very small volume.

England, in her present hurry to create gas masks for all her civilians as well as her armed forces, makes her charcoal out of a combination of peat, lignite and coal which is ground and carbonized with heat. It is then mixed with a binder material, compressed, and run through dies from which it emerges as long spaghetti-shaped strips that are sliced up into granules for the masks.

The commercial art of making charcoal is gradually approaching the methods long used by the Chemical Warfare Service, so that it has been decided to make the long-secret patent public property.

ADLETS FOR HOBBYISTS

(See regular classified section for rates and other information.)

STAMPS

SUPER-WONDER Packet offered, containing 60 different stamps from Afghanistan, Transjordania, North Borneo, Manchukuo, Sudan, Guadeloupe, Iraq, Sarawak, French and British Colonies, including natives, beasts, ships, etc. This entire packet for only 5c to approval applicants. Big illustrated lists free. Kent Stamp Company, Box 87-Z (G.P.O.), Brooklyn, N. Y.

BIG Packet Free! Unusual Stamps including scarce Zeppelin; smallest triangle; Indochina airmail; old Eastern Rounelia; Canadian Coronation, Silver Jubilee; Italian East Africa; giant diamond-shaped stamp; Mozambique; Liberia. Holy Lands Stamps from Palestine, Lebanon, Iraq, etc., many others. Only 5c to approval applicants. Frederick B. Fitts, Framingham, Mass.

NEJD (Saudi Arabia)—Bolivia Eucharistic Triangle, Cayman Island Pictorial, Negri Sembilan, Turks & Caicos Islands, Manchukuo, Bahamas War Provisional, Five Dollar United States, British Solomon Islands (Cannibaland). Everything 3c with our famous approvals. Viking Stamp Co., 1-R Hanson Place, Brooklyn, N. Y.

GIFT Edition Stamp Annual Free—Sixty pages with hundreds of Illustrations featuring Canadians, Newfoundlands, United States, Colonials, Foreign, Supplies. Sent Free. Gray Stamp Company, Dept. MM, Toronto, Canada.

STAMPS! 100 diff. 3c; 500 diff. 35c; 1,000 diff. 90c! Illustrated Album (4000 spaces) 22c. Approvals sent. Tatham Stamp Co. (D9) Springfield, Mass.

BEST priced and Cleanest approvals in America. A trial will convince. White Stamp Co., Box 196, Sylvania Sta., Fort Worth, Texas.

UNITED STATES—45 different, Hinges, Gauge, Pricelist all for 10c. No approvals. Seidenberg, Baroda, Mich.

FREE!!! Two Coronation Sets. Postage 3c. Roberts, 312T Shearerbldg, Baycity, Michigan.

TEN different United States, over 40 years old, 10c. Guy Elsea, Bowling Green, Ohio.

FREE Packet—British Colonies to approval applicants. Gilbert Ellis, Orono, Maine.

OLD STAMPS WANTED

OLD Stamps Wanted. I Will Pay $100.00 each for 1924 1c green Franklin stamps, rotary perforated eleven (up to $1,000.00 each if unused). Send 6c for Large Illustrated Folder showing Amazing Prices paid. Vernon Baker, 444-MI-2, Elyria, Ohio.

INDIAN CURIOS & RELICS

INDIAN relics, Confederate bills, coins, gems, minerals, curios, Catalog 52 illustrations 5c. 100 good ancient arrowheads $3.00. Tomahawk head 50c. H. Daniel, Hot Springs, Ark.

RARE COINS

COIN COLLECTORS—Read "The Numismatist". Published monthly. News and feature articles on coins, medals and paper money. Six month trial subscription $1.50. Sample copy 30c. Write for circular. American Numismatic Association, 99 Livingston St., Brooklyn, N. Y.

COMMEMORATIVE Half Dollars, Lincoln, Stone Mountain, Oregon, Texas, Cleveland, Kentucky, San Diego, Long Island, $1.50 each. Illustrated Catalogue No. 14, 25c. Norman Schultz, Salt Lake, Utah.

FREE: Foreign Coin, Banknote and Large Illustrated coin catalogue, for 4c postage. Approvals sent. Tatham Coinco, Springfield-9, Mass.

INDIAN Relics. Dolls. Old Glass. Coins. Minerals. Opals. Catalogue 5c. Indian Museum, Northbranch, Kansas.

MINERALOGY

PETRIFIED wood—Assorted specimens from the everglade lands of tropical Florida—25c. Scruggs & Starbuck, Box 2284, Tampa, Florida.

Mental Poisoning!

Thoughts that Enslave Minds

Tortured souls. Human beings whose self-confidence and peace of mind have been torn to shreds by invisible darts—the evil thoughts of others. Can envy, hate and jealousy be projected through space from the mind of another? Do poisoned thoughts, like mysterious rays, reach through the ethereal realms to claim innocent victims? All of us, from day to day and hour to hour, in every walk of life, in every circumstance, are possible victims of mental poisoning, unless we understand its nature, and can quickly recognize its infectious innoculation.

This FREE Sealed Book

Do you know the strangest of all laws in man's body? Man's life, happiness, health, and enjoyment of the things of life depend on his understanding of the working of the human mind. Let the Rosicrucians explain how you may acquire an age-old method for mind development and the proper use of your latent inner powers. If sincere, write for the *free sealed book.* Address: Scribe **H. O. S.**

The ROSICRUCIANS
(AMORC)
San Jose, California

Better Tools-Lower Prices
GET BALKO'S 1940 CATALOG!

THE CATALOG OF EVERYTHING IN POWER TOOLS, SPRAY EQUIPMENT, MODEL SUPPLIES, ELECTRIC MOTORS, Metal Lathes, accessories, Artist Air Brushes, Spray Guns, Elec. Bench Grinders, Grinding Wheels, Lathe Chucks, Micrometers, Pulleys, V Belts, Carving Tools, Compressors. BALKO'S complete stocks and fast service save you time and money. **Send a 5c stamp today for your big new copy.**

BALKO ELECTRIC TOOL & SUPPLY CO.
605 W. Washington, 2-B, Chicago



Earn Cash at Home!

We paid M. M. $1174 for exceptional "cellar crop" SNOW-KING mushrooms! Big free picture book tells if your cellar, shed, barn, suitable. We furnish materials, buy all you raise, guarantee starting crop. Write today for "Guaranteed Success Plan" backed by company established 1908—Twenty-five coast to coast branches.

UNITED MUSHROOM CO.
3848 Lincoln Ave., Dept. 480, Chicago

FIRST STEP to Successful Pictures
Send to "CENTRAL"
GET THIS

Free illustrated catalog listing everything photographic, still and movie cameras, films, lenses, equipment at tremendous savings. Hundreds of bargains new and used—all guaranteed. Liberal trade-ins on cameras and equipment. Write now for free copy of this newest money-saving bargain book—just out. Limited edition. Hurry!

free 64 pages—crammed with new and used bargains book

CENTRAL CAMERA CO.
Dept. B-11, 230 So. Wabash Avenue, Chicago, Illinois

Since 1899

Super-Highways Across U. S. Impractical, Experts Claim

Not for many years, if ever, will America's highway map include, super-transcontinental roadways that would make trips from New York to San Francisco a speedy, enjoyable trip through a virtual parkway. Dreams of such highways—to be financed by tolls for their use—have fallen before actual facts assembled by the U. S. Bureau of Public Roads.

Only a small portion of the present traffic on American highways could be attracted to these super-systems, states a report prepared by government experts on highways.

Transcontinental tourists would certainly like the roads, it is agreed, but how many such tourists do you think are travelling daily on an average basis? Take a guess.

Counts made on east-west highways at checking stations established from Canada to Mexico show that only 300 passenger vehicles crossed this north-south line daily in transcontinental travel.

The upkeep of super-highways would be based on tolls which have been estimated to be about one cent per vehicle mile for passenger cars and 3.5 cents a mile for trucks and busses.

However, on a cost basis, the Bureau of Public Roads finds that estimated tolls for the six super-roadways planned would come out to be about $100,000,000 less each year than the estimated cost of maintaining them. The building cost for the total of 14,336 miles of super-highways would be nearly three billion dollars.

Only on one stretch of the proposed highways would conditions appear to be self-supporting. This is the 172-mile highway which would link Philadelphia, Pa., and New Haven, Conn., and tap a dense population area. By 1960 this section of super-highway might break even.

Face Plate Vise

[*Continued from page* 97]

assurance that when the vise is mounted, the solid jaw will be correctly aligned. To mount the vise, disregard the regular mounting holes. Bore and tap two new bolt holes in line with vise screw. One of these should be as far forward on the base as possible and the other back on the ways, a distance equal to the distance between the face plate slot center lines, to give maximum adjustment. A spacer washer will probably be needed for the back bolt. In use the stock is lined up to center boring operations by adjusting the vise in the slots in one direction and by moving the stock in the jaws in the other direction. For facing, it is only necessary to place it in the jaws roughly centered. The bar used for tightening the vise has one of the balls ground off one end, so that it can be removed before the lathe is started.—*K. W. R.*

This Skirt Should Be Pressed With Steam

Here's a new skirt capable of turning either the eye or an 80,000 kilowatt turbine. The pretty girl is shown wearing $5;000 worth of General Electric turbine buckets. Though a bit impractical as skirt material, these steel buckets, also known as blades, are important parts of huge electricity producing equipment. They function like the blades of a windmill in harnessing energy of scorching steam shot through some turbines at 1,200 miles an hour speed, 12 times greater than that of the average hurricane.

To prevent books from mildewing in humid weather, the U. S. Bureau of Chemistry and Soils suggests placing one or more half-filled cans of lump lime on shelves behind books; with the added warning that the lime expands when absorbing moisture and may overflow a can filled beyond the half-way point.

Earthquakes that originate as deep in the earth as 400 miles have been recorded.

Two-Toned Bracelet

[*Continued from page* 103]

hole, and dip the blocks one at a time and wipe off the drop which forms on the lower corner. Varnish can be used, but clear lacquer will be better.

Finally, thread the elastic through each row of holes and knot it between the blocks with the enlarged holes and trim the knot so it will disappear in the holes when released.

Plastic is used in the same way and many lovely color combinations are possible. You also have a wide choice of wood combinations. Here are some: mahogany and box elder; red cedar and figured gum; figured gum and sap gum; ebony and holly; osage orange and white pine. You will be able to work others easily.—*D. R. Van Horn.*

HOT WATER *with* **SPEED KING**

From Any Electric Light Socket

MILLIONS of homes, stores and offices everywhere need **SPEED KING**—the new, amazing **Water Heater**—that heats water boiling hot so fast it takes your breath away. No muss! No waste of time or fuel! Just a simple "plug-in" at any 110-volt light socket—and presto . . . just the amount of hot water you need for the bath, for shaving, for dishwashing. **CHEAPER** because you don't have to heat gallons when you need only a few quarts. **FASTER** because the intense electric heat goes directly into the water. Sells fast on a 60-second demonstration. Small in size—fits the pocket, easy to carry. Anyone can afford it.

60-SECOND Demonstration *Amazes Housewives*

SAMPLES for AGENTS

I WANT you to know the almost uncanny heating action of this speedy water-heating invention. Write quick—a postcard will do—for my **SAMPLE OFFER** that brings you an actual Sample **SPEED KING** for demonstration. You can make plenty of cash as my agent. HURRY! Big season starting now. **SPEED KING** solves the hot water problem when furnaces shut down. Act quick and I'll show you how to make the fastest money of your life.

Send No Money!—*Just your name.*

NU-WAY MFG. COMPANY

Dept. 622, Walnut Bldg., DES MOINES, IOWA

JUST SEND NAME

WRITE your name and address in the margin, clip & mail this coupon or send penny postcard to Dept. 622.

Name .....

Address .....

City .....

$25.00 A WEEK IN CASE OF SICKNESS OR ACCIDENT

$25.00 A WEEK	Sickness or Accident
Up to $5000.00	Accidental Death
Up to $5000.00	Loss of Hands, Feet or Eyes
$100.00	Emergency Aid Fund
$100.00	Hospital Expense Fund

PLUS ADDITIONAL BENEFITS—ALL AS PROVIDED IN THE POLICY

4000 persons—every hour—day and night—are stricken with sickness and accident. What will happen to you and your family when your turn comes?

ONLY $1 A MONTH

Write immediately for free inspection of policy.

MEN AND WOMEN AGES 16 TO 75

DON'T SEND A PENNY. NO MEDICAL EXAMINATION. NO AGENT WILL CALL. NO OBLIGATION. SEND YOUR NAME AND ADDRESS AT ONCE FOR 10 DAY FREE INSPECTION OFFER.

GEORGE ROGERS CLARK CASUALTY CO.
NATIONAL INSURANCE AGENCY
Dept. 10, 542 South Dearborn Street, Chicago, Ill.

SURE ROUTE
TO
HAPPY-LAND
MAIL TODAY
SURE
J. C. DEAGAN, Inc., Dept. 4812
1770 Berteau, Chicago
Without cost or obligation, tell me about the easy-to-play DEAGAN MARIMBA . . . its sensational rise in the music world . . . the fun it provides at parties . . . the opportunities for radio, stage and dance-band fame.
Name—Please PRINT
Address
EASY TO PLAY

ENLARGED! REVISED!
and STILL—

Free!

A new and enlarged edition of the famous MECHANIX ILLUSTRATED Blueprint Booklet has been prepared. Bigger, better and more complete than ever—it's still free! All you have to do is write in and ask for it.

The new booklet contains full descriptions of more than fifty blueprints of interest to the handy man. In addition to the excellent selection of boat blueprints described in previous issues, the revised catalogue contains blueprint suggestions for model planes, model boats, powered bikes, and a variety of other projects.

You may obtain one of these booklets simply by writing: "Please send me a MECHANIX ILLUSTRATED Blueprint Booklet." Give your name and address. The booklet will be sent to you without any obligation whatever. Mail letter or postcard to:

Blueprint Department
MECHANIX ILLUSTRATED
1501 Broadway, New York City

"Liquid Coal" Demonstrated As Fuel For Automobiles

Foreshadowing a time when man's immense coal resources, which far outstrip other sources of power available at present, may be put to work in the automobile in place of gasoline, a stock car changed only in one minor respect made a first demonstration run in Chicago on a new fuel, "liquid coal."

Made of finely pulverized coal suspended in an oil "carrier," the new fuel, whose development has attracted the attention of scientists and engineers during the last twenty years, has enabled the car, an eight-cylinder 1939 sedan, to accelerate up to 35 miles an hour within a block.

Applied to a standard automobile by Dr. Francis W. Godwin, director of the coal research division of the Armour Institute of Technology's research foundation, the fuel is more economical than gasoline although the cost per gallon is about the same, because it contains far more energy.

Neither the carburetor nor the ignition system of the car was changed in any way. One fine-screened filter was removed from the fuel system to accommodate the colloidal fuel, Dr. Godwin said.

Because coal itself is essentially inconvenient to handle and bulky, scientists have been trying to devise a workable "liquid coal" such as this for many years. Thus far, however, it was stated in Washington, all such fuels have been impossible to use economically in an internal combustion engine because of the ash which coal leaves and which causes great wear and tear on the moving parts of the engine. It is not known whether the new development has overcome this difficulty.

"Three different types of liquid coal have been successfully used in the tests on the stock model automobile," Dr. Godwin said. The first was a suspension of a specially prepared coal ground to 300 mesh in a mixture of gasoline, fuel oil and lubricating oil. The second was a similar suspension of the coal in a Diesel oil. The third test was made with a very light oil. In each case, the liquid coal was chemically stabilized to hold the coal in suspension.

Photo Uses For Radio Parts

[*Continued from page* 113]

secondary to light two or three dial bulbs in dark corners. All you'll need is as many miniature lamp sockets and common bell wire. By putting a radio switch into each lamp line you have control at your fingertips. Stain the bulbs red with any good lamp stain or even finger-nail polish.

Another use for pilot bulbs is as a wand-light for searching dark corners and high shelves. Attach a socket to a long stick, as in Fig. 6, and wire down to a switch on the handle and to a suitable voltage source by a plug. Bulbs can be left plain or stained as needed.—*L. B. Robbins.*

Cold Ice Puts Out Hot Gasoline Fire

"Dry ice," the stuff that keeps your ice cream from melting and makes your soft drinks fizz, is also a highly effective fire extinguisher, as the picture above indicates. In a demonstration recently held in New York, gasoline was allowed to pour down the side of a ten-foot wall, and then ignited. Using a new type extinguisher with a horn-like spout, a man dressed in ordinary clothing then advanced directly into the flames and put them out in a few seconds.

The gas in the cylinder actually is carbon dioxide, imprisoned under high pressure. When released, it solidifies into very fine particles resembling snow.

When laminated glass was first patented in England in 1885, the idea was not safety but the decorative feature of colored glass between clear sheets.

It is harder to see a blonde out of the corner of the eye than a brunette, especially if the blonde wears red and the brunette black and white, says the Better Vision Institute, explaining that colored objects far to the side are less easily perceived than black and white.

Diesel trucks consume 30 to 50 per cent less fuel than gasoline powered trucks.

BIG MONEY ASSEMBLING NEW **PORTABLE BOAT** *In a Few Hours*

For Paddle—Motor-Sail

WRITE FOR BIG FREE CIRCULAR

DOUBLE BLADE PADDLE or OARS NOW Included with your KIT!

OK-2, the Outboard Ki-Yak Convertible to Sail or Rowboat.

YOU can assemble Mead's amazing, portable KI-YAKS easily, inexpensively at home from our patented, numbered cut-to-fit construction KITS and save nearly HALF—or sell to others at big profits! Portable. Strong. Seaworthy. Thousands assembled from our KITS using EXCLUSIVE new construction principle. No experience needed. Just use simple hand tools. New 50 lb. and 75 lb. OUTBOARD KI-YAK KITS ready—use oars, sail, motor. Also 3 paddle-sail models from 20 to 45 lbs. (Double-blade paddle or Oars now INCLUDED with your Kit). Investigate now! Write or send postcard for FREE lavishly-illustrated Circulars, low Factory-To-You Prices!

Write FOR BIG LAVISHLY ILLUSTRATED Free CIRCULARS

MEAD GLIDERS 15 S. MARKET ST. Dept. M-20, CHICAGO, U.S.A.

or Send Post Card

HOW TO GET A DAISY Air Rifle

1 Use Your Christmas Cash

Buy your Daisy with money you got for Christmas. If you've spent it or didn't get any . . . and have a birthday between now and July 15, listen:

2 WE WILL HELP YOU GET A DAISY FOR YOUR BIRTHDAY! Just do this:

Send us your name, address, date of your next birthday. You'll receive Birthday Reminder Kit 2 weeks before birthday. It's FUN using it—and we hope it helps YOU get a Daisy for your birthday. Write quick!

500 SHOT Repeater CARBINE $2.50 Higher in Canada

DAISY MANUFACTURING COMPANY
562 Union St., Plymouth, Michigan, U.S.A.

HANDEE *Tool of 1001 Uses*

A WHOLE TOOL SHOP IN YOUR HAND

Smooth, steady power at your finger tips. Uses 300 accessories to grind, drill, polish, rout, cut, carve, sand, saw, sharpen, engrave, etc. Plugs in any AC or DC socket, 18,000 r.p.m. 16 oz.

Save Hours of Hand Work

Get A Demonstration

at Hardware, Tool or Dept. Stores, or order on 10-Days Money-Back Trial. $10.75 postpaid with 3 Accessories . . . De Luxe Model, 25,000 r.p.m. 12 oz. $18.50 with 6 Accessories.

FREE 64-Page Catalog Complete information on Handee Products and their wide application in crafts work and industry all over the world.

Chicago Wheel & Mfg. Co. 1101 W. Monroe St., Dept. MI Chicago, Ill.

New Ideas for Home & Shop

Names and addresses of manufacturers of products described below will be sent free to any reader on request, provided a stamped, return envelope accompanies the inquiry. Mention date of issue when writing.

Multiplying and dividing can be done in rapid time with a simple computing device, which has two scales on endless tapes so that they can be turned separately or as a unit.

A hollow aluminum life preserver which weighs four and a half pounds will support three persons. Nineteen inches in diameter and five inches thick, it will last indefinitely. It can easily be thrown a distance of fifty feet.

For rip or crosscut sawing, beveling, dadoing, tenoning and shaping there is a small, electric, woodworking machine. It can be mounted on a floor stand or on a light trailer.

For rural or suburban sections there is a combination range with two ovens, one electric and the other heated by coal or wood. The electric oven is intended for summer use and the other one to help heat in cold weather. Both can be used at once, if desired.

A new egg beater has a wide grip which enables the housewife to take a firm hold. The drive crank can be turned at high speeds with less than the usual exertion because of the stability given the unit by this extra gripping surface. The drive wheels and gearing are enclosed in bakelite housing, thus preventing corrosion and simplifying cleaning of the beater.

For general building construction, sealing conduits, tile setting, glazing and other purposes there is a sealing and caulking compound that is permanently plastic, waterproof and unaffected by vibration, vermin or severe weather.

Plastic hooks for shower curtains will not rust or break. Available in a full range of colors, they are easily slipped on rod or curtain and will not come off by accident.

With a new lettering set which is fast and versatile it is possible with a single guide to produce eight different types of lettering by changing the setting of the tracer and pen arm. Each guide has upper and lower case letters, numerals and characters.

A 14-ounce bag of specially treated paper and charcoal, which ignites at the touch of a match or lighted cigarette, eliminates the need for kindling to start the furnace. You put the bag on the furnace grate, light it, pour coal on top, and almost at once you have a roaring fire.

A semi-automatic tying device quickly ties bundles and boxes with wire. After the wire is draped around the bundle or carton, the mechanism tensions, ties and cuts the wire and rethreads for the next tie. The same adjustments handle different sizes.

A focusing spotlight, working with a flash gun apparatus and using the same batteries, is available for taking flash photos when the light is not sufficient for focusing.

More room in the medicine closet or on the shelf is afforded by these wide flat caps which enable a tube to be stood on its end until entirely consumed. Caps are made of bakelite in a wide range of sizes for all types of collapsible tubes.

A rare clay, specially treated, will seal dams, ponds and ditches which have excessive leakage or seepage. When spread over the surface it eliminates most of the seepage.

WHEN YOU'RE SHOOTIN' FOR FLAVOR LIGHT UP WITH

Velvet

LOU HUTT
Ace Newsreel
Cameraman

...the MILDNESS of fine old Kentucky Burley tobacco, aged in wood.

...the FLAVOR of pure maple sugar for extra good taste.

Packs easy in a pipe rolls smooth in a cigarette better tobacco for both.

for Better Smoking Tobacco

—say VELVET!

Copyright 1940, LIGGETT & MYERS TOBACCO CO.

PRINTED IN U.S.A.

Miss America
CHESTERFIELD'S VALENTINE GIRL
Patricia Donnelly of Detroit

A Pocketful of Pleasure

CHESTERFIELD

The real reason why Chesterfields are in more pockets every day is because Chesterfield's Right Combination of the world's best cigarette tobaccos gives you a better smoke... definitely milder, cooler and better-tasting. *You can't buy a better cigarette.*

MAKE YOUR NEXT PACK CHESTERFIELD *They Satisfy*

Copyright 1940, Liggett & Myers Tobacco Co.

CAN THIS WAR BE WON?

Above is a comprehensive cross-section sketch of the famous Maginot line, showing the traps which are waiting for an attacking foe. Below is the inside of a typical sector of the line, showing the subterranean passages, barracks, and ammunition magazines. A huge army lives underground as France waits a German attack.

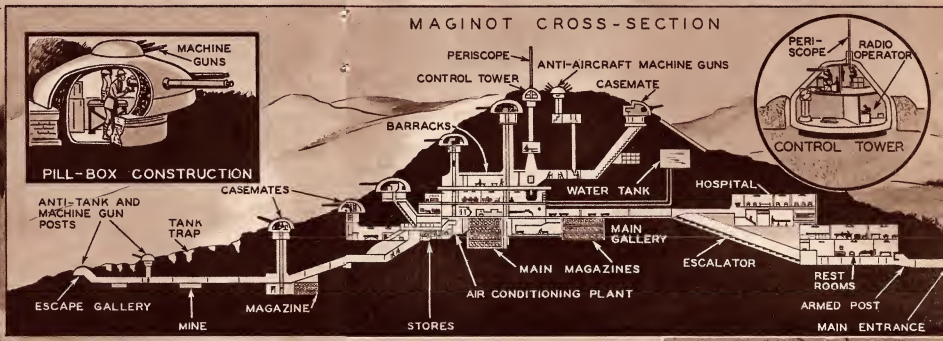

Modern fortifications along the Maginot and Siegfried lines have made France and Germany "invasion proof." The result may be a war no nation can win!

by Maxwell Hamilton

WHAT happens when an irresistible force meets an immovable object?

This age-old problem in physics, a familiar question to every school boy, seems destined to find an answer in Europe's latest armed conflict. For the present "war to end wars" is a contest between two of the world's greatest immovable objects—the Siegfried and the Maginot lines!

Imagine, if you can, an advancing horde of 2,000,000 men. It is armed to the eyes with high-speed, rapid-firing tanks, motorized cavalry and infantry, mobile artillery and ammunition units, every known type of poison gas, and the most modern and efficient equipment available for pouring forth a ceaseless storm of shot and shell, endless tons of lead, steel and flame. Magnify this glittering array of death on the march five times over—and, against it, the French defenses on the Maginot line still would remain impregnable!

On the other hand, should the Allies abandon such snug security and launch an attack of their own, just as much power and strength and cunning, multiplied many times over, would avail them nothing. The German Siegfried line—not 10 miles away—is just as redoubtable, just as impossible

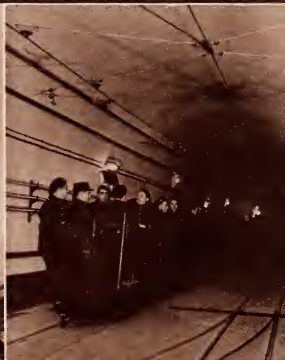

Right: French troops passing through a tunnel of the Maginot line, more than 100 feet below the surface.